


### BUBBLEMASSAGE™ BATH K-1164-G

#### Features

- Acrylic
- Oval shape
- Drop-in
- 120 BubbleMassage™ airjets
- Blower motor is supplied with a grounding-type plug-in cord
- Molded lumbar supports and armrests
- Blower motor with 300 W heater and electronic user control
- 72" (1829 mm) x 42" (1067 mm) x 21" (533 mm)

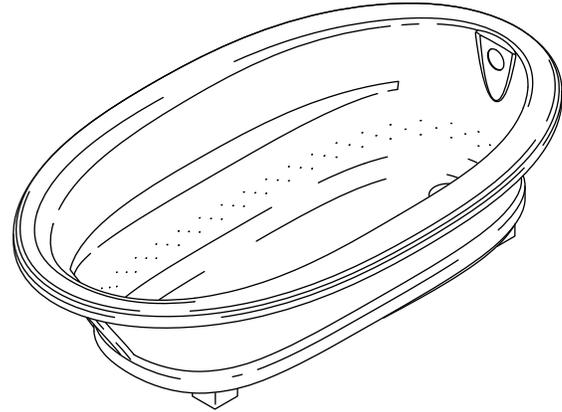

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable

#### Specified Model

Model	Description	Colors/Finishes	
K-1164-G	Bubblemassage bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
<b>Recommended Accessories</b>			
K-11677	Swiftflo™ adjustable trip lever drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
<b>Optional Accessories</b>			
K-577	Under-mount kit	<input type="checkbox"/> NA	

#### Product Specification

The acrylic drop-in bath with airjets shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Product shall have a blower motor with 300 W heater and an electronic user control. Blower motor shall have a grounding-type plug-in cord. Product shall have 120 BubbleMassage airjets and molded lumbar supports and armrests. Product shall feature an oval shape. Bath shall be Kohler Model K-1164-G-\_\_\_\_\_.

# SUNWARD®

## Technical Information

Fixture*:	
Bathing well;	
Basin area, bottom	55-1/4" (1403 mm) x 23-1/2" (597 mm)
Basin area, top	64-1/2" (1638 mm) x 32" (813 mm)
Weight	112 lbs (50.9 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	75 gal (284.1 L)
* Approximate measurements for comparison only.	

Included components:	
Cut-out template	1042557-7

Blower motor	Heater	V	Hz	A
	300 W	120	60	5
Minimum access panel blower motor:				
20" (508 mm) W x 15" (381 mm) H			required	

## Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 5 A, 60 Hz
Locate the outlet behind the bath and within 24" (610 mm) of the blower.	


## Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 37 lbs/square foot (178 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-11677)

Recommended faucet area

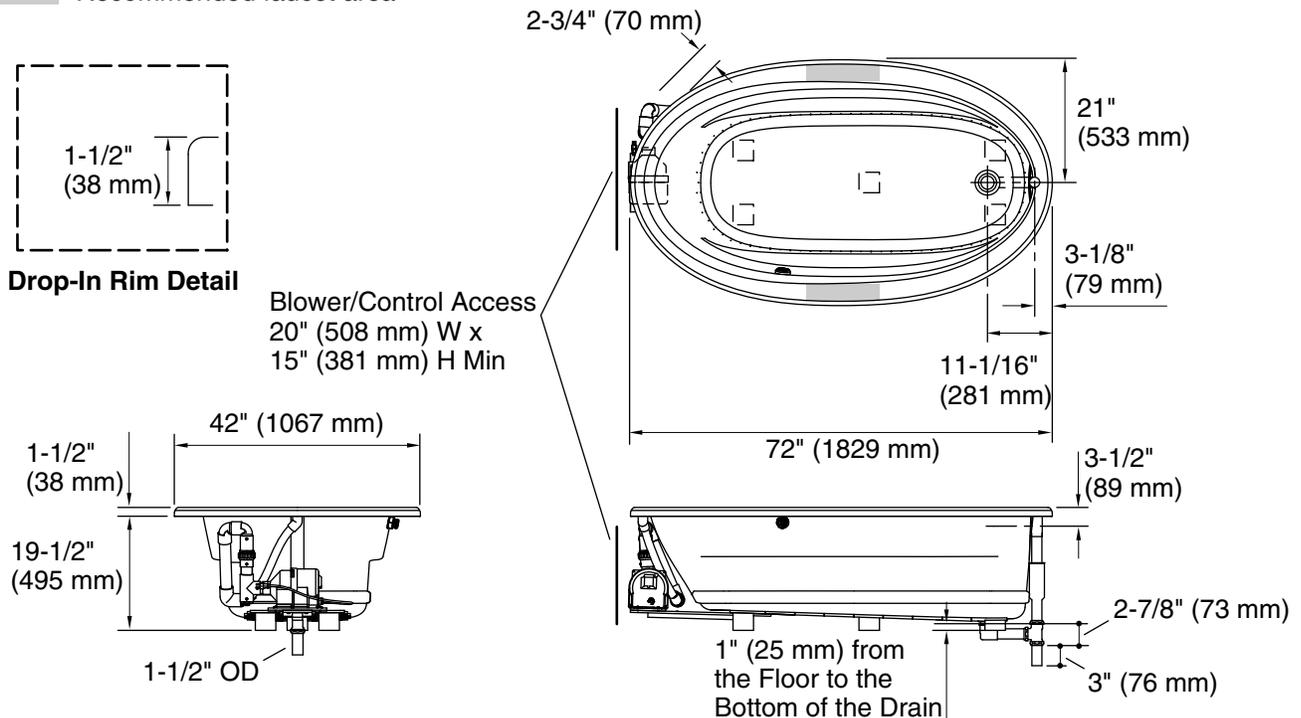

## Product Diagram