

Features

- Metal construction.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- High-temperature limit setting for added safety.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- 5" (127 mm) spout reach.
- Flexible supplies.
- Touch-activated drain with tailpiece and no overflow.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



For complete listing of available colors, go to kohler.com.



ADA CSA B651 OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF 61
NSF 372
ADA
ICC/ANSI A117.1
DOE - Energy Policy Act 1992
EPA WaterSense®
CSA B651
OBC


All applicable US Federal and State material regulations

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Product Specification

Bathroom sink faucet shall be 5" (127 mm) spout reach and 7-1/2" (191 mm) spout outlet height. Bathroom sink faucet shall be metal construction. Bathroom sink faucet shall be lever handle. Bathroom sink faucet shall be touch-activated drain with tailpiece and no overflow. Bathroom sink faucet shall be single-hole installation. Bathroom sink faucet shall be KOHLER Model K-12183.

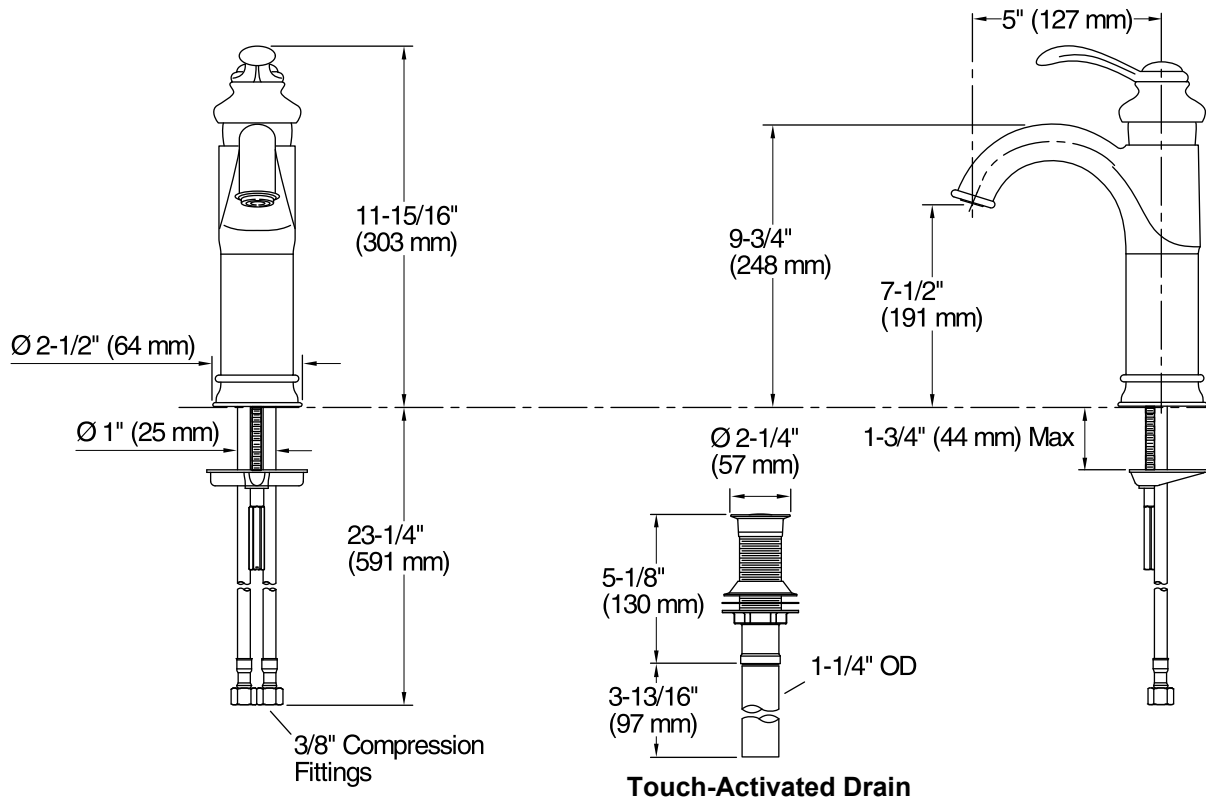

Technical Information

All measurements are nominal.

Spout reach: 5" (127 mm)

Drain included: YES

Drain tailpiece included: YES

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Installation Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.