

PINSTRIPE

Features

- Metal construction
- Brass valve bodies
- Pop-up drain with lift rod and tailpiece
- Flexible connections for easy installation
- Cross or lever handles
- 5" (127 mm) spout reach
- For 8" (203 mm) or 16" (406 mm) centers
- · Quarter-turn washerless ceramic disc valves
- Low stationary spout
- 1.5 gallons (5.7 liters) per minute maximum flow rate

Codes/Standards Applicable


Specified model meets or exceeds the following at date of manufacture:


- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- Energy Policy Act of 2005
- EPA WaterSense®
- All applicable US Federal and State material regulations

WIDESPREAD BATHROOM SINK **FAUCET** K-13132









Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

		Cross				Lever			
Model	Description								
K-13132-3A	Widespread bathroom sink faucet – Pure Design	□СР	□ Other			'		'	
K-13132-3B	Widespread bathroom sink faucet			□ CP	□ Other				
K-13132-4A	Widespread bathroom sink faucet – Pure Design					□ CP	□ Other		
K-13132-4B	Widespread bathroom sink faucet							□ CP	□ Other

Product Specification


The two-handle widespread bathroom sink faucet shall be made of metal construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature quarter-turn washerless ceramic disc valves, flexible connections for easy installation, a 5" (127 mm) spout reach, and a low stationary spout. Product shall be for 8" (203 mm) or 16" (406 mm) centers. Product shall feature a pop-up drain with lift rod and tailpiece. Product shall be available with cross or lever handles. Faucet shall be Kohler Model K-13132-

PINSTRIPE_®

Optional Accessories						
	Additional flow options are available (refer to the Kohler Price Book)	□ NA				

Installation Notes

Install this product according to the installation guide.

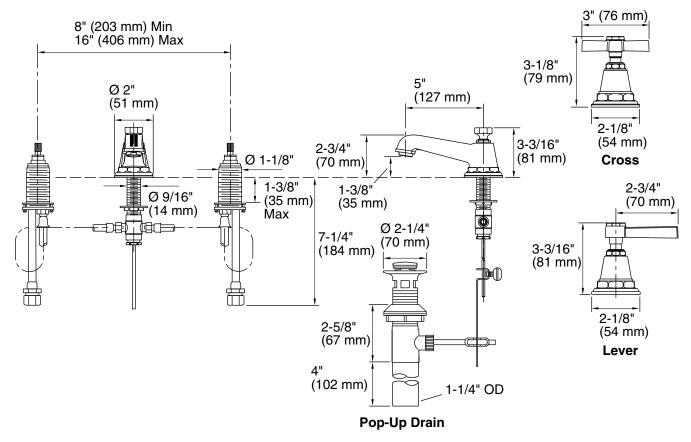

Product Diagram

