

Features


- Acrylic
- Oval shape
- Drop-in
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- Optional K-1491 removable bath pillow
- Optional K-9698 whirlpool trim kit in various finishes
- 8 individually adjustable ProFlex® hydro-massage jets
- Textured bottom surface
- Coordinates with Serif suite
- 60" (1524 mm) x 42-1/4" (1073 mm) x 21" (533 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

5' BATH WHIRLPOOL WITH HEATER K-1337-H

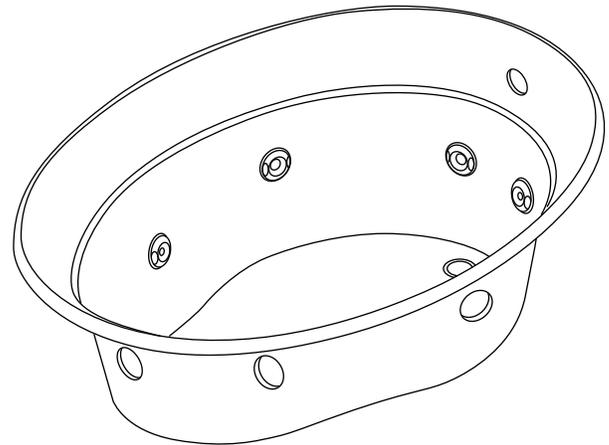

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1337-H	5' bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7166-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-9698	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The oval bath whirlpool shall be 60" (1524 mm) in length, 42-1/4" (1073 mm) in width, and 21" (533 mm) in height. The bath whirlpool shall be made of acrylic for drop-in installation. The bath whirlpool shall have 8 individually adjustable ProFlex® hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. The bath whirlpool shall have a textured bottom surface and shall coordinate with the Serif suite. The bath whirlpool shall have an optional K-9698 jet trim kit, and an optional K-1491 removable pillow. The bath whirlpool shall be Kohler Model K-1337-H-_____.

SERIF®

Technical Information

Fixture*:	
Basin area:	
Bathing well	42" (1067 mm) x 28" (711 mm)
Top area	55" (1397 mm) x 40" (1016 mm)
To overflow:	
Water depth	15-1/2" (394 mm)
Capacity	73 gal (276.3 L)
Weight	115 lbs (52 kg)
* Approximate measurements for comparison only.	

Pump:	V	Hz	A	
1-speed	120	60	7.5	
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Included components:	
Cutout template	1017044-7

Required Electrical Service


Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.	

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 43 lbs/square foot (208 kg/square meter) loading.

Provide pump/control access in either location shown; supplies must not interfere with pump/control access.

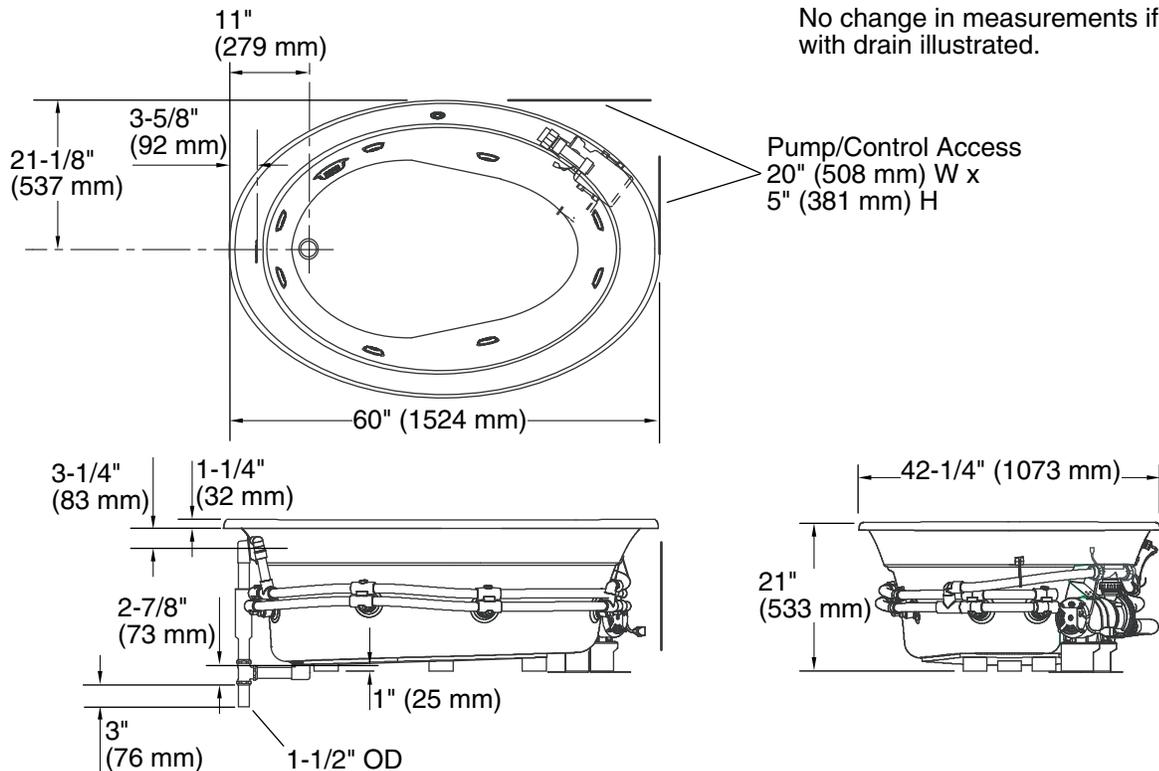

No change in measurements if connected with drain illustrated.

Product Diagram