

Features

- Brass construction.
- For single-hole installation.
- One-piece, self-contained ceramic disc valve which allows both volume and temperature control.
- Temperature memory allows the faucet to be turned on and off at any temperature setting.
- 4-3/8" (111 mm) spout reach.
- Stationary spout.
- Pop-up drain with tailpiece.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



For complete listing of available colors, go to kohler.com.

ADA

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

ADA

ICC/ANSI A117.1

DOE - Energy Policy Act 1992

All applicable US Federal and State material regulations


TAS

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Product Specification

Bathroom sink faucet shall be 4-3/8" (111 mm) spout reach and 2-3/16" (56 mm) spout height. Bathroom sink faucet shall be brass construction. Bathroom sink faucet shall be lever handles. Bathroom sink faucet shall be pop-up drain with tailpiece. Bathroom sink faucet shall be single-hole installation. Bathroom sink faucet shall be KOHLER Model K-16027-4.

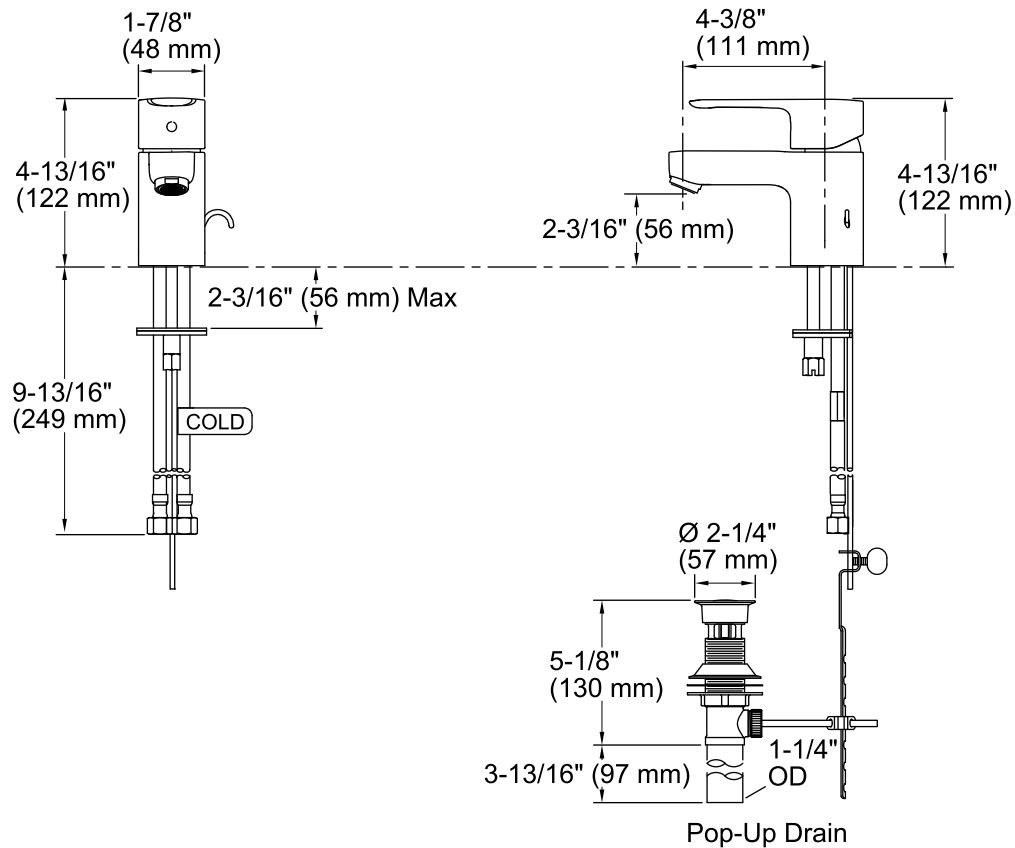

Technical Information

All measurements are nominal.

Spout reach: 4-3/8" (111 mm)

Drain included: YES

Drain tailpiece included: YES

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Installation Notes

Install this product according to the installation guide.

ADA, TAS compliant when installed to the specific requirements of these regulations.