

## Features


- 3-year warranty from date of installation
- Steam generators can be installed up to 25' (7.6 m) away from steam bath area

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- UL 499
- CSA C22.2 No. 88

## STEAM GENERATOR K-1708

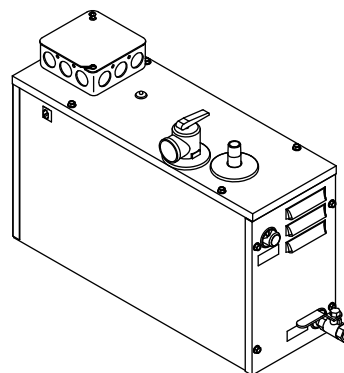

## Colors/Finishes

- NA: None applicable

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

## Specified Model

| Model  | Description                         | Colors/Finishes             |
|--------|-------------------------------------|-----------------------------|
| K-1708 | 7 kW Fast-Response® steam generator | <input type="checkbox"/> NA |

**Required Accessories:** Choose either Option 1 or Option 2 below.

*Option 1:*

|           |                                |                             |                             |                                     |
|-----------|--------------------------------|-----------------------------|-----------------------------|-------------------------------------|
| K-1647-PC | Steam control kit, power clean | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |
|-----------|--------------------------------|-----------------------------|-----------------------------|-------------------------------------|

*Option 2:*

|        |                                             |                             |                             |                                     |
|--------|---------------------------------------------|-----------------------------|-----------------------------|-------------------------------------|
| K-1737 | Steam adaptor kit and steam head <b>AND</b> | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other_____ |
| K-694  | Landscape digital interface <b>OR</b>       |                             |                             | <input type="checkbox"/> Other_____ |
| K-695  | Portrait digital interface                  |                             |                             | <input type="checkbox"/> Other_____ |

**Optional Accessories:** Only available for use with Option 2 above.

|       |                                       |  |  |                                     |
|-------|---------------------------------------|--|--|-------------------------------------|
| K-657 | Landscape auxiliary digital interface |  |  | <input type="checkbox"/> Other_____ |
| K-658 | Portrait auxiliary digital interface  |  |  | <input type="checkbox"/> Other_____ |

## Product Specification

The 7 kW steam generator shall have a three-year warranty from date of installation. Product shall be installed up to 25' (7.6 m) away from the steam bath area. Steam generator shall be Kohler Model K-1708-NA.

## Technical Information

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| Water and drain requirements: |                                                      |
| Water supply                  | 3/8" line, 3/8" NPT female thread                    |
| Steam line                    | 1/2" copper line, 1/2" NPT female thread             |
| Pressure relief valve         | 3/4" NPT male thread, valve supplied                 |
| Drain line                    | 3/8" line, 3/8" NPT male thread, ball valve supplied |
| Generator:                    |                                                      |
| Weight                        | 19-1/2 lbs (8.8 kg)                                  |
| Electrical rating             | 240 V, 36 A, 50/60 Hz                                |

## Required Electrical Service

|                             |                      |
|-----------------------------|----------------------|
| Dedicated circuit required: |                      |
| Generator                   | 240 V, 50 A 50/60 Hz |


## Installation Notes

Install this product according to the installation guide.

Factory sized: L x H x W = cubic feet. Choose the appropriate model. For every foot of ceiling height over 8 ft (2.4 m), use the next larger steam unit. Always round your measurements up. Wall material is irrelevant for sizing.

For this steam generator, enclosure shall not exceed the maximum volume rating:

| Steam generator model | Power rating | Maximum volume rating |
|-----------------------|--------------|-----------------------|
| K-1708                | 7 kW         | 112 cu ft (3.2 cu m)  |

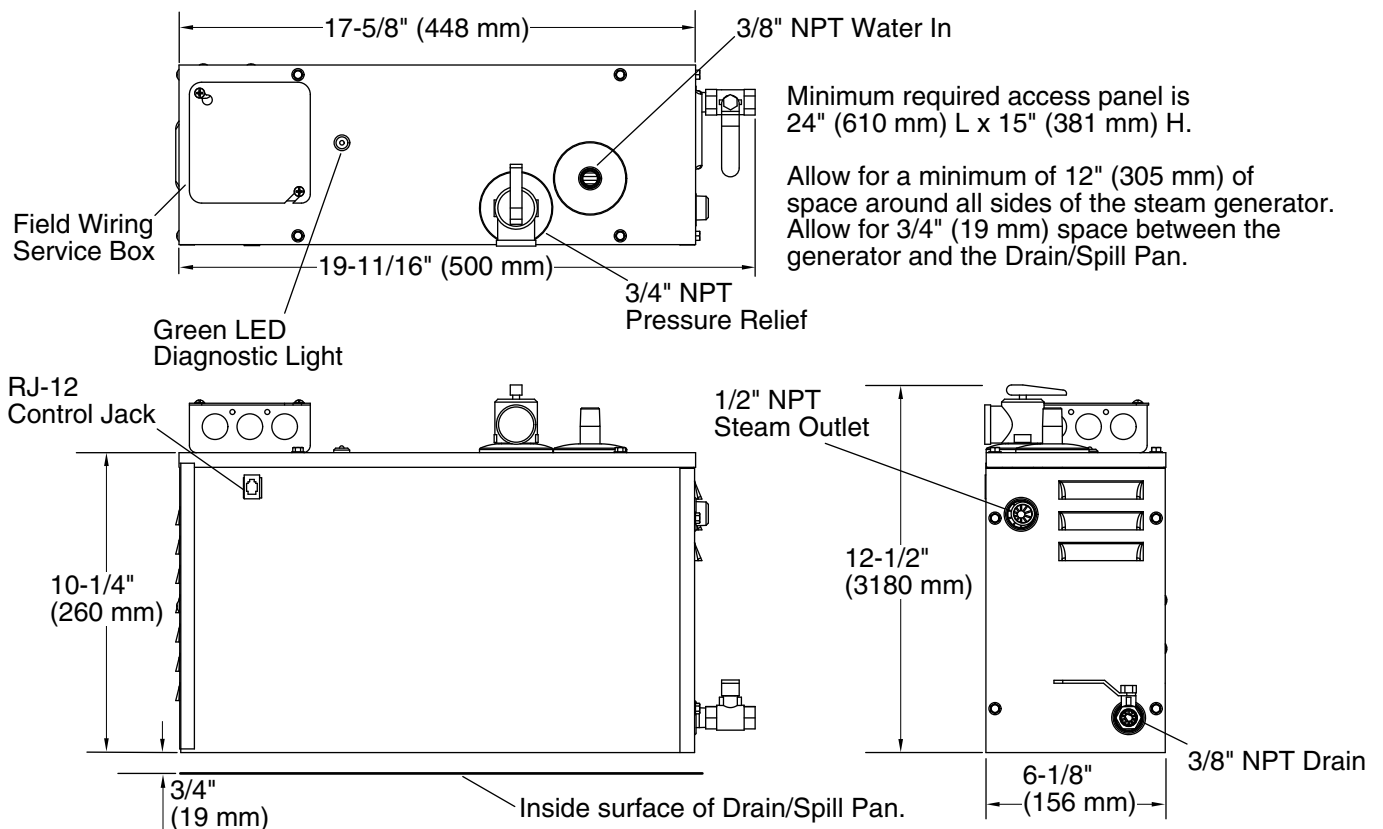

## Product Diagram