

Features


- 3 year warranty
- Steam generators can be installed up to 25' (7.6 m) away from steam bath area

Codes/Standards Applicable

Specified model meets or exceeds the following:

- UL 499
- CSA C22.2 No. 88

STEAM GENERATOR K-1733-NA



Colors/Finishes

• NA: None applicable

Accessories:

- · CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Fi	nishes	
K-1733-NA	Steam generator, 9 kW, fast response	□ NA	□ NA	
	essories: Choose either Option 1 or Option 2 below	<i>'</i> .		
Option 1:				
K-1647-PC	Steam control kit, power clean	□ CP	□ PB	☐ Other
Option 2:				
K-1737	Steam adaptor kit and steam head AND	□ CP	□ PB	☐ Other
K-694	Landscape digital interface OR			☐ Other
K-695	Portrait digital interface			☐ Other
Optional Acce	essories: Only available for use with Option 2 above			
K-657	Landscape auxiliary digital interface			☐ Other
K-658	Portrait auxiliary digital interface			☐ Other

Product Specification:

The 9 kW steam generator shall have a three-year warranty. Product shall be installed up to 25' (7.6 m) away from the steam bath area. Steam generator shall be Kohler Model K-1733-NA.

Technical Information

Water and drair	requirements:		
Water supply	3/8" copper line, 3/8" NPT female thread		
Steam line	1/2" copper line, 1/2" NPT female thread		
Pressure relief valve	3/4" NPT female thread, valve supplied		
Drain line	3/8" copper line, 3/8" NPT female thread, ball valve supplied		
Generator:			
Weight	19-1/2 lbs (8.8 kg)		
Electrical rating			

Installation Notes

Install this product according to the installation guide.


Factory sized: L \times H \times W = cubic feet. Choose the appropriate model. For every foot of ceiling height over 8 ft (2.4 m), use the next larger steam unit. Always round your measurements up. Wall material is irrelevant.

For this steam generator, do not exceed the maximum volume rating:


Steam generator model	Power rating	Maximum volume rating
K-1733-NA	9 kW	240 cu ft (6.8 cu m)

Required Electrical Service

Dedicated circuit required:				
Generator	9 kW, 240 V, 50/60 Hz, 50 A			

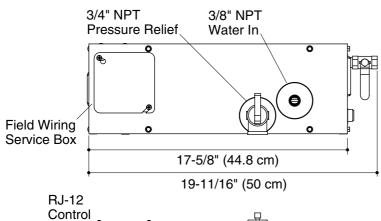

Minimum required access is 20" (50.8 cm) L x 13" (33 cm) H x 6-1/2" (16.5 cm) W.

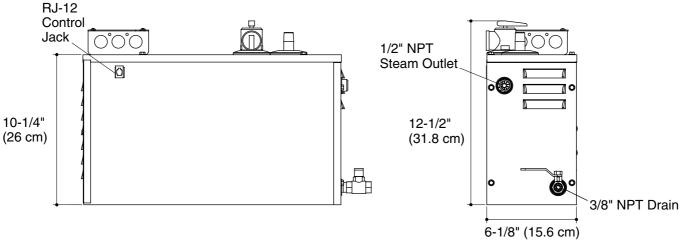

Product Diagram

