

#### Features

- Brass construction.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- High-temperature limit setting for added safety.
- Single-hole mounting.
- ADA compliant lever handles.
- Flexible connections for easy installation.
- 360° swivel spout with 9"(229 mm) clearance.
- Quarter-turn washerless ceramic disc valve for filtered water.
- Separate lever handle and filtration inlet hose for cold filtered water.
- Contemporary European styling.
- Flexible supplies.
- 2.0 gal/min (7.6 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



For complete listing of available colors, go to [kohler.com](http://kohler.com).

**ADA**

#### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

ADA

ICC/ANSI A117.1

DOE - Energy Policy Act 1992


All applicable US Federal and State material regulations

#### KOHLER® Water Filter Systems - Five-Year Limited Warranty

See website for detailed warranty information.

#### Product Specification

Kitchen sink faucet shall be 7-3/4" swing spout reach and 9-5/8" (244 mm) spout outlet height. Kitchen sink faucet shall be brass construction. Kitchen sink faucet shall be lever handles. Kitchen sink faucet shall be 360° swivel spout with 9" (229 mm) clearance. Kitchen sink faucet shall be separate inlet hose for cold filtered water. Kitchen sink faucet shall be for single-hole mount installation. Kitchen sink faucet shall be KOHLER Model K-18865.

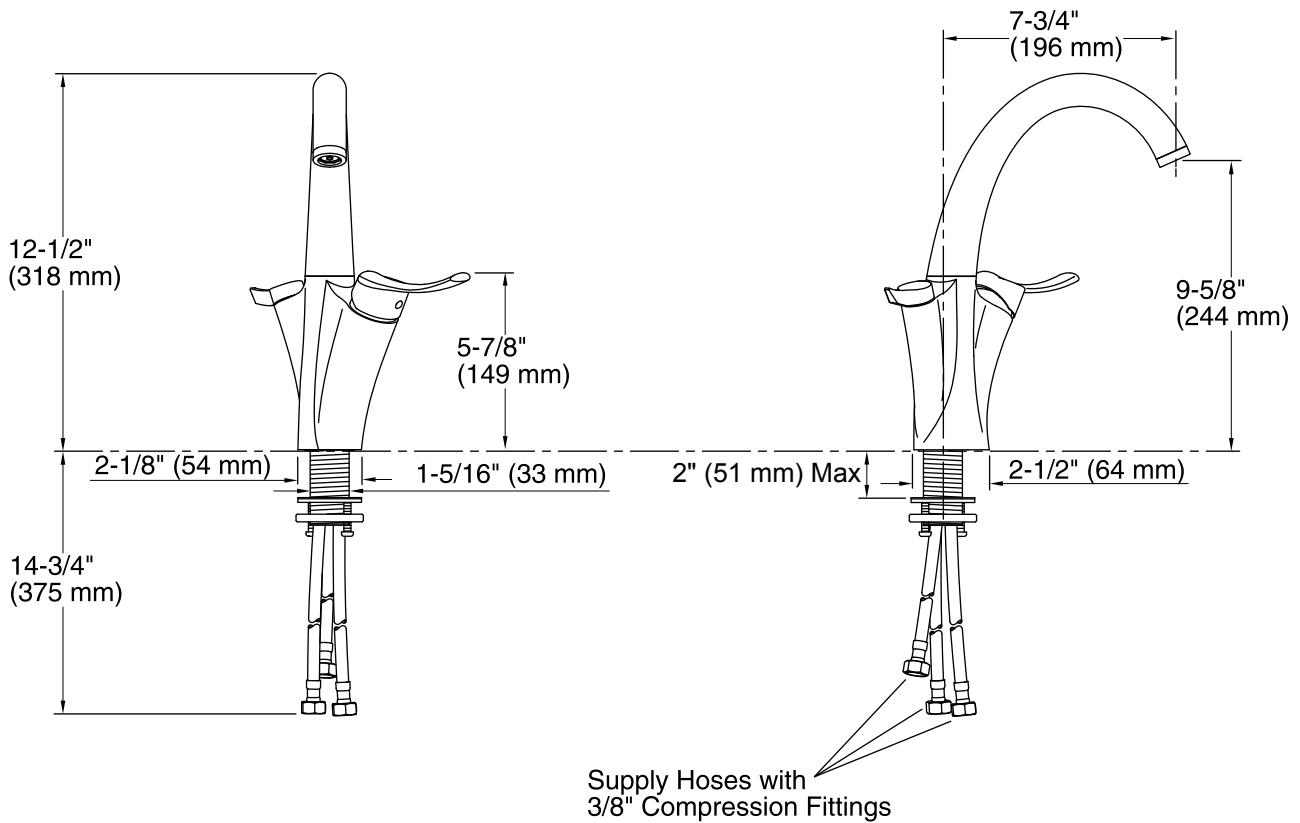

### Technical Information

All measurements are nominal.

Spout reach: 7-3/4" (197 mm)

**Faucet:**  
Flow rate: 2.2 gal/min (8.3 l/min)  
Pressure: 60 psi (4.1 bar)

### Installation Notes

Install this product according to the installation guide.

This product is not for use with instant hot water systems.

ADA compliant when installed to the specific requirements of these regulations.