no
touch
flush™

Touchless Toilet Flush Kit
K-1954-0

KOHLER® touch*less*™
Toilet Flush Kit

THE BOLD LOOK
OF **KOHLER®**

Upgrade to the no-touch flush for your home.

KOHLER® touchless™

Nothing to touch means fewer germs to pick up or leave behind. The KOHLER® Touchless toilet flush kit turns a standard toilet into a touchless toilet. Simply hold your hand over the sensor to flush—no touching required. Works with most canister (A) and flapper (B) toilets.

Fits Most Toilets
Works with canister and flapper toilets

Easy to Use
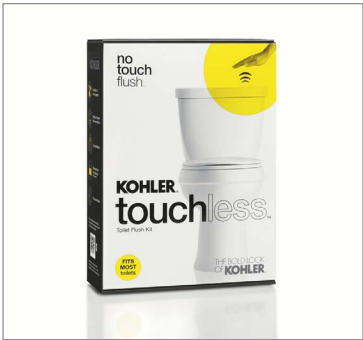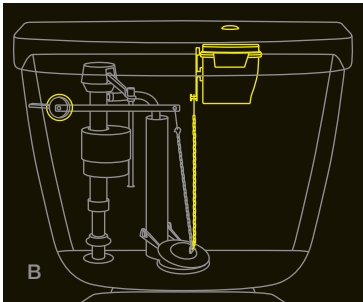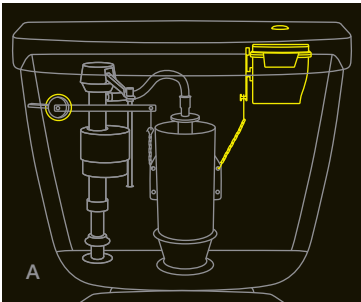Simply hold your hand over the sensor to activate

Hygienic
Going touchless means fewer germs to pick up or leave behind

No Wiring Needed
Powered by 4 AA batteries (included)

Easy Installation
Kit is quick and simple to install

SKU	Description
K-1954-0	Touchless Toilet Flush Kit*

*Hole cover in white included. Other colors are available.
 Not compatible with dual-flush, top-mount flush, pressure-assist or ballcock valve toilets.

THE BOLD LOOK OF KOHLER®

KOHLER.com/TouchlessToilet

Features
- Fits most toilets and works with canister and flapper flush valves.
- Simply hold your hand over the sensor to activate.
- Powered by 4 AA batteries (included).

For complete listing of available colors, go to kohler.com.
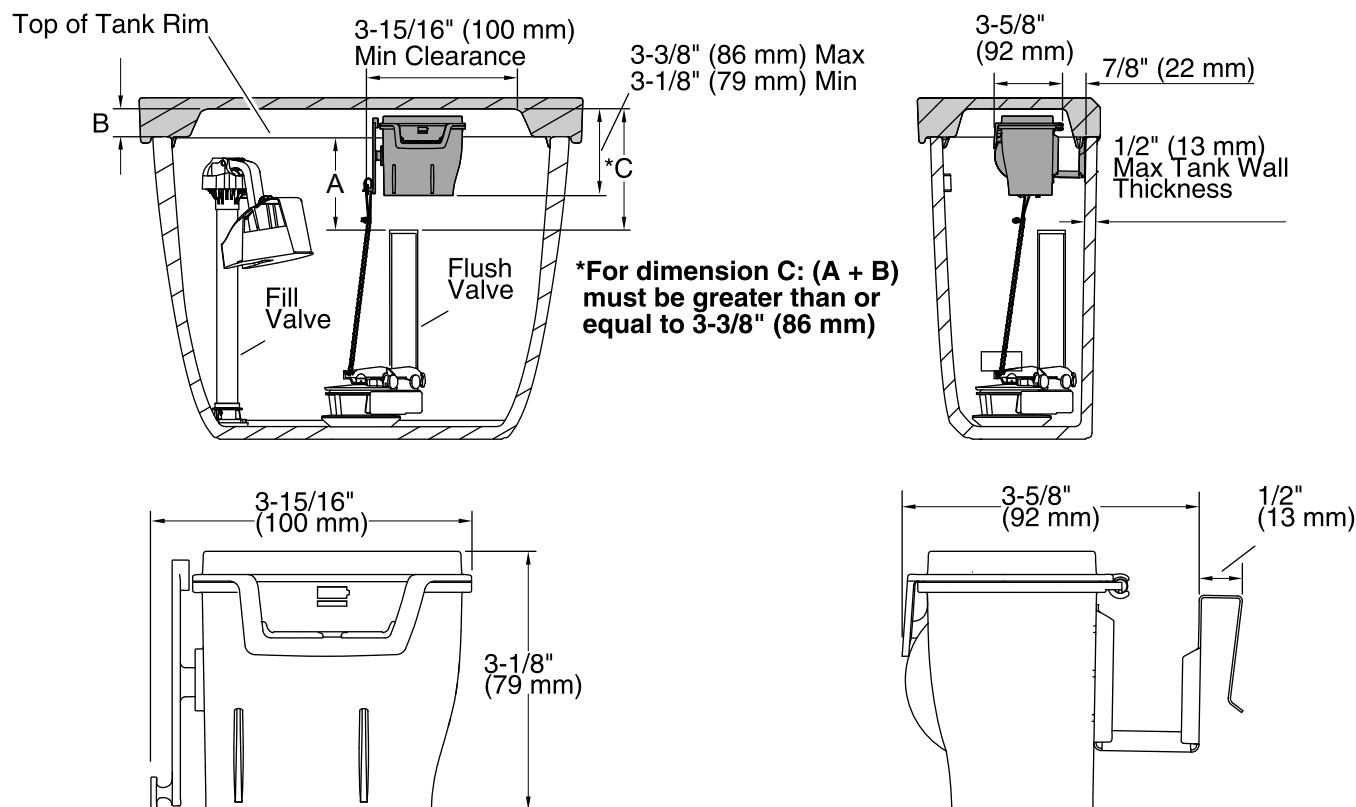
Codes/Standards
None Applicable

KOHLER® One-Year Limited Warranty
See website for detailed warranty information.

Product Specification
Touchless toilet flush kit shall be 3-15/16" (100 mm) in length, 3-5/8" (92 mm) in width, and 3-1/8" (79 mm) in height. Touchless toilet flush kit shall feature sensor to activate flush. Touchless toilet flush kit shall be KOHLER Model K-1954.

Required Clearances

Top of Tank Rim

3-15/16" (100 mm)
Min Clearance

3-3/8" (86 mm) Max
3-1/8" (79 mm) Min

B

A

*C

Flush
Valve

Fill
Valve

***For dimension C: (A + B)
must be greater than or
equal to 3-3/8" (86 mm)**

3-5/8"
(92 mm)

7/8" (22 mm)

1/2" (13 mm)
Max Tank Wall
Thickness

3-15/16"
(100 mm)

3-1/8"
(79 mm)

3-5/8"
(92 mm)

1/2"
(13 mm)

Technical Information
All measurements are nominal.

Installation Notes

Install this product according to the installation guide.

CAUTION: Risk of property damage: Do not use lithium ion batteries with this product. Exposing lithium ion batteries to water can result in a fire.

The touchless toilet flush kit is not compatible with the following types of toilets: dual flush, ballcock valve, top actuator, and pressure assist.

To confirm that a flapper style flush valve is compatible, verify there are adequate clearances for the tank and lid as illustrated.

To confirm that a canister style flush valve is compatible, view the compatibility list of toilets found on kohler.com, K-1954 product detail page.