


Features

- Acrylic
- Drop-in or under-mount installation
- Three temperature settings
- Two raised corner seats, at 6-3/4" (171 mm) and 11-7/8" (302 mm) from bath floor
- 27-1/2" (699 mm) soaking depth
- 48" (1219 mm) x 48" (1219 mm) x 34" (864 mm)

CUBE BATH WITH BASK™ HEATED SURFACE K-1968-W1

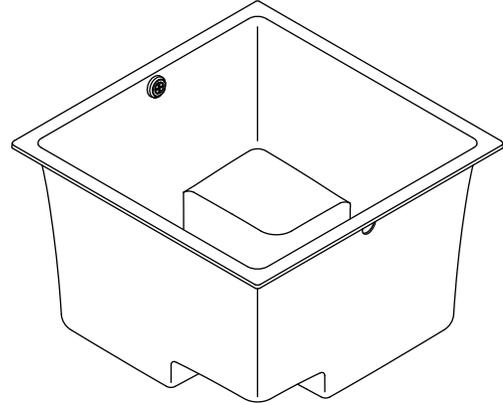

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1968-W1	Cube bath with Bask heated surface	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-8150	Cable drain	<input type="checkbox"/> NA		
K-8134	Drain trim kit		<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
Optional Accessories				
K-578	Under-mount kit	<input type="checkbox"/> NA		

Product Specification

The acrylic cube bath with heated surface shall be 48" (1219 mm) in length, 48" (1219 mm) in width, and 34" (864 mm) in height. Bath shall be for drop-in or under-mount installation. Bath shall have two raised corner seats, at 6-3/4" (171 mm) and 11-7/8" (302 mm) from bath floor. Bath shall have a 27-1/2" (699 mm) soaking depth. Bath shall feature three temperature settings. Bath shall be Kohler Model K-1968-W1-_____.

UNDERSCORE™

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom	39-3/8" (1000 mm) x 39-3/8" (1000 mm)			
Basin area, top	44-5/8" (1134 mm) x 44-5/8" (1134 mm)			
Weight	110 lbs (49.9 kg)			
To overflow:				
Water depth	27-1/2" (699 mm)			
Capacity	171 gal (647.3 L)			
* Approximate measurements for comparison only.				
Drop-in cut-out		47" (1194 mm) x 47" (1194 mm)		
Heater:	W	V	HZ	A
	65	120	60	1.1

Installation Notes


Install this product according to the installation guide.

Locate the bath within 24" (610 mm) of a GFCI-protected, 120 V, 15 A, grounded electrical outlet.

Floor support under bath must provide for a minimum of 105 lbs/square foot (513 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements if connected with drain illustrated. (K-8150)

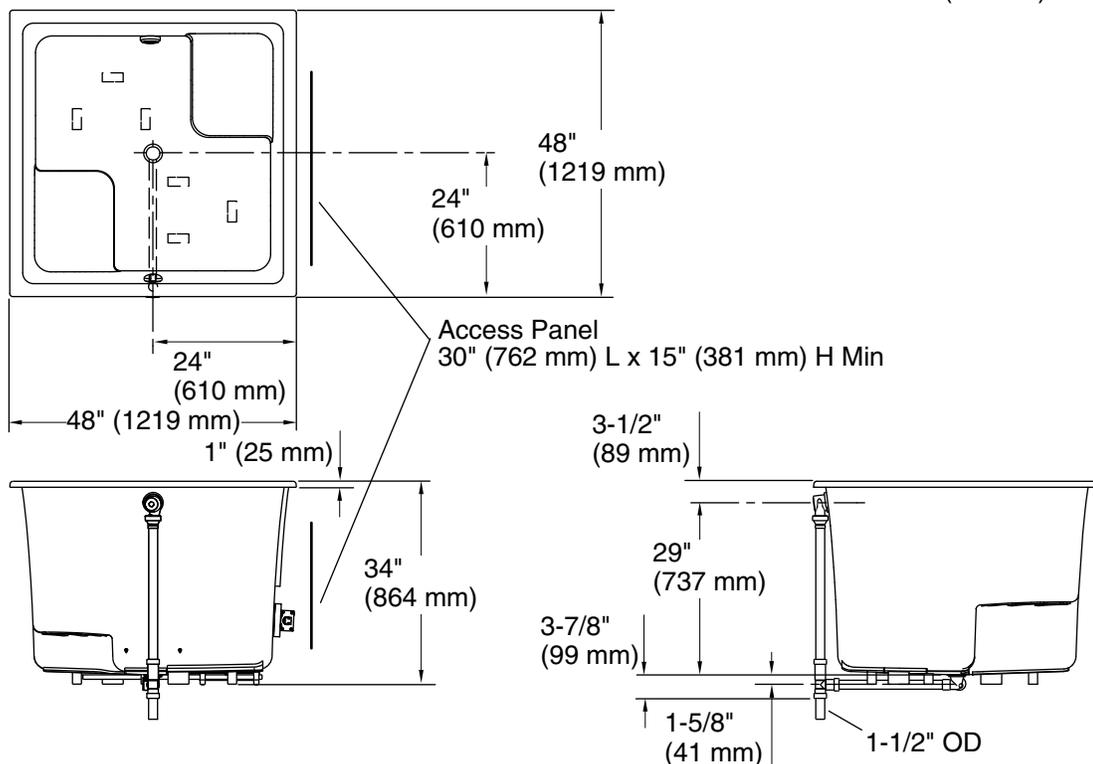

Product Diagram

UNDERSCORE™ CUBE BATH WITH BASK™ HEATED SURFACE

Page 2 of 2
1196038-4-A

THE BOLD LOOK
OF **KOHLER**®