

### Ordering Information

Applicable product:		
Water filtration system	K-200 (includes K-201)	
Replacement cartridges:		
Hi Flow filter cartridge	K-201	required**
Premium replacement cartridge	K-202	required**
**Required for configuration illustrated.		

### Product Information

Application Guideline/Water Supply Parameters:	
Water Pressure	30–125 psi (206–862 kPa)
Water Temperature	40°–100°F (4.4°–38° C)
Flow Rates:	
K-201	1.5 gpm (5.68 lpm)
K-202	0.6 gpm (2.27 lpm)

### Installation Notes

Unit must be mounted vertically.

Do not install to a water line whose pressure exceeds 125 psi (862 kPa).


For cold water use only.

Filter cartridges should be replaced when either a noticeable decrease in flow is observed, after 1,500 gallons, or when 6 months have elapsed.

Keep filter and plastic cartridges away from heat or flame.

Do not install unit in direct sunlight.

Do not install unit where the temperature may drop below freezing.

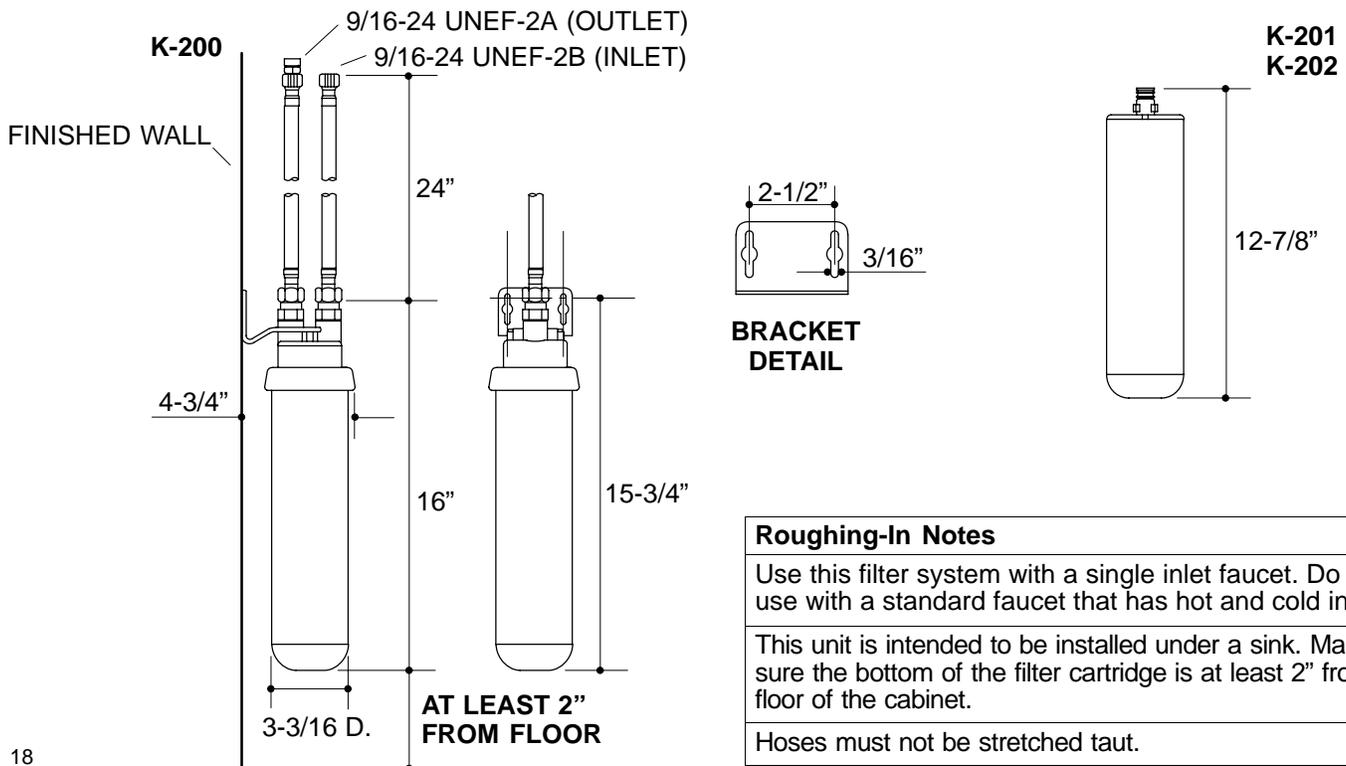

### Roughing-In Notes

Use this filter system with a single inlet faucet. Do not use with a standard faucet that has hot and cold inlets.

This unit is intended to be installed under a sink. Make sure the bottom of the filter cartridge is at least 2" from the floor of the cabinet.

Hoses must not be stretched taut.