



Cimarron®
Comfort Height® Toilet
K-3828-RA

Features

- 29-5/16" x 18-15/16" x 28-13/16"
- Large 3-1/4" canister flush valve features a powerful jet action, providing rapid water delivery from tank to bowl.
- High-efficiency system offers bulk flushing performance and best-in-class cleanliness
- Significant water savings of as much as 16,500 gallons of water annually over a 3.5 gallon toilet
- Meets strict flushing performance guidelines established by the EPA's WaterSense program
- Qualifies as an HET(High-Efficiency Toilet). Consumer rebates are available in some municipalities
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System
- 12" rough-in supply line not included
- Right-hand lever



For complete listing of available colors, go to kohler.com.



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

EPA WaterSense®

CSA B651



OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Product Specification

Toilet shall be made of vitreous china. Toilet shall be 29-5/16" (745 mm) in length, 18-15/16" (481 mm) in width, and 28-13/16" (732 mm) in height. Toilet shall be one-piece. Toilet shall be 1.28 gpf (4.8 lpf). Toilet shall be right-hand trip lever. Toilet shall be Comfort Height®. Toilet shall be a 12" (305 mm) rough-in. Toilet shall be Kohler Model K-3828-RA.

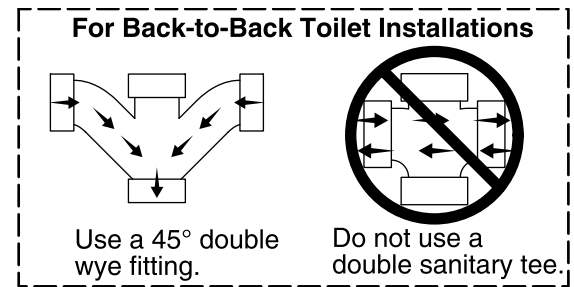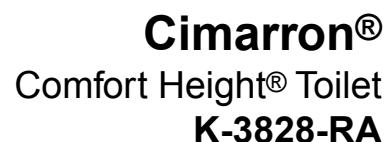

Toilet style:	One-piece
Bowl shape:	Elongated front
Passageway:	2-1/8" (54 mm)
Flush rate - full:	1.28 gpf (4.8 lpf)
Water area:	11-3/4" x 8" (298 mm x 203 mm)
Water depth from rim:	6-1/8" (156 mm)
Rough-in:	12" (305 mm)
Seat hole centers:	5-1/2" (140 mm)

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.

K-4650 is the recommended toilet seat for public use accessible installations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.