

OCTAVE_{TM}

Features


- 18-gauge stainless steel
- Under-mount
- Double (equal) bowl
- Includes installation hardware
- Includes SilentShield_® sound-absorption technology
- Includes left bottom bowl rack, right bottom bowl rack, sponge caddy, and a bottle of stainless steel cleaner
- 32" (813 mm) x 20-1/4" (514 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

ASME A112.19.3/CSA B45.4

UNDER-MOUNT KITCHEN SINK K-3843



Colors/Finishes

• NA: None applicable

Accessories

- CP: Polished Chrome
- ST: Stainless Steel
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | | Colors/Finishes |
|-------------|----------------------------------------|------|-----------------|
| K-3843 | Under-mount kitchen sink | | □ NA |
| Included Ac | ccessories | | |
| K-6139 | Sponge caddy | □ ST | |
| K-6453 | Bottom bowl rack, right | □ ST | |
| K-6483 | Bottom bowl rack, left (flippable) | □ ST | |
| 1056368 | Stainless steel cleaner | | □ NA |
| Optional Ac | cessories | | |
| K-8801 | Duostrainer _® sink strainer | □ CP | ☐ Other |

Product Specification

The under-mount kitchen sink shall be made of 18-gauge stainless steel. Sink shall be 32" (813 mm) in length and 20-1/4" (514 mm) in width. Sink shall feature double equal bowl. Sink shall include SilentShield sound-absorption technology. Sink shall also include left bottom bowl rack, right bottom bowl rack, sponge caddy, a bottle of stainless steel cleaner and installation hardware. Sink shall be Kohler Model K-3843-NA.

OCTAVE_{TM}

Technical Information


| Fixture*: | | |
|-------------------------------------------------|-----------------------------------------|--|
| Basin area | 14-3/8" (365 mm) x 18-5/16" (465 mm) | |
| Water depth | 9" (229 mm) | |
| Drain hole | Ø 3-5/8" (92 mm) | |
| * Approximate measurements for comparison only. | | |


| Included components: | | |
|----------------------------|-----------|--|
| Hardware kit – under-mount | 91915 | |
| Cut-out template | 1181611-7 | |

Installation Notes

Install this product according to the installation guide.

Allow a minimum of 2'' (51 mm) clearance around the sink rim for clip attachment.

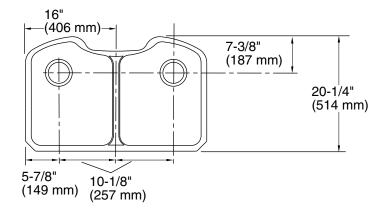

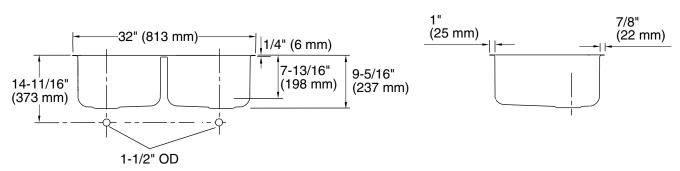

Product Diagram

