


Features

- Vitreous china
- Elongated bowl
- Comfort Height®
- 1-1/2" top spud
- Less seat and supply
- 4" (102 mm) rough-in
- 2-1/8" (54 mm) glazed trapway
- 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf) depending on flushometer specified
- Floor-mount rear outlet flushometer bowl
- Available with bedpan lugs (-L)
- 31-1/2" (800 mm) x 14-7/8" (378 mm) x 17" (432 mm)

COMFORT HEIGHT® HIGH EFFICIENCY BOWL K-4352

ADA

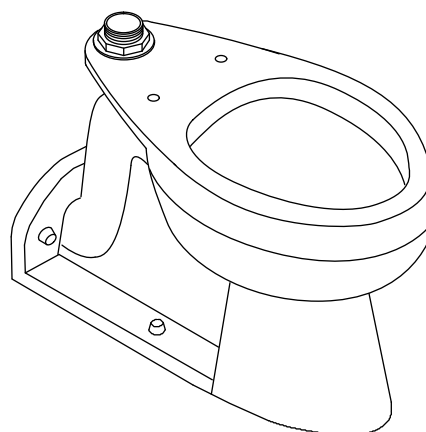

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1
- Energy Policy Act of 1992

Colors/Finishes

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-4352	Comfort Height high efficiency bowl	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4352-L	Comfort Height high efficiency bowl with bedpan lugs	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories				
K-4731-C	Stronghold® open-front seat with check hinge	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-4731-SC	Stronghold open-front seat with self-sustaining check hinge	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-4654	Lustra™ open-front seat with support arms and cover	<input type="checkbox"/> 0		
K-4670-CA	Lustra open-front seat (with anti-microbial agent)	<input type="checkbox"/> 0		
K-10673	WAVE exposed toilet flushometer – 1.28 gpf (4.8 lpf)		<input type="checkbox"/> CP	
K-10956	Touchless DC toilet flushometer – 1.28 gpf (4.8 lpf)		<input type="checkbox"/> CP	
K-13517	Manual toilet flushometer – 1.28 gpf (4.8 lpf)		<input type="checkbox"/> CP	

Product Specification

The elongated bowl shall be made of vitreous china. Product shall be 31-1/2" (800 mm) in length, 14-7/8" (378 mm) in width, and 17" (432 mm) in height with a 12" (305 mm) x 10" (254 mm) water area. Product shall be 4" (102 mm) rough-in. Product shall be Comfort Height, less seat and supply. Product shall have 2-1/8" (54 mm) glazed trapway, and a 1-1/2" top spud. Product shall be available with bedpan lugs (-L). Product shall be floor-mount rear outlet flushometer bowl. Product shall feature 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf) depending on flushometer specified. Bowl shall be Kohler Model K-4352-_____.

Technical Information

Fixture:	
Configuration	top spud, elongated
Water per flush	1.28 gal (4.8 L) or 1.6 gal (6 L)*
Passageway	2-1/8" (54 mm)
Water area	12" (305 mm) x 10" (254 mm)
Water depth from rim	5-7/8" (149 mm)
Seat post hole centers	5-1/2" (140 mm)
* Based upon use of a 1.28 gal (4.8 L) or 1.6 gal (6 L) flushometer valve.	


Included components:	
Bowl	K-4352
Spud	18357
Floor screws and bolt caps	1017124
Bolt cap accessory pack	1013092

Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

For back-to-back installations: Connect the toilet to the vertical stack using a: double fixture fitting, double combination wye and 1/8 bends, or double wye and 1/8 bends.

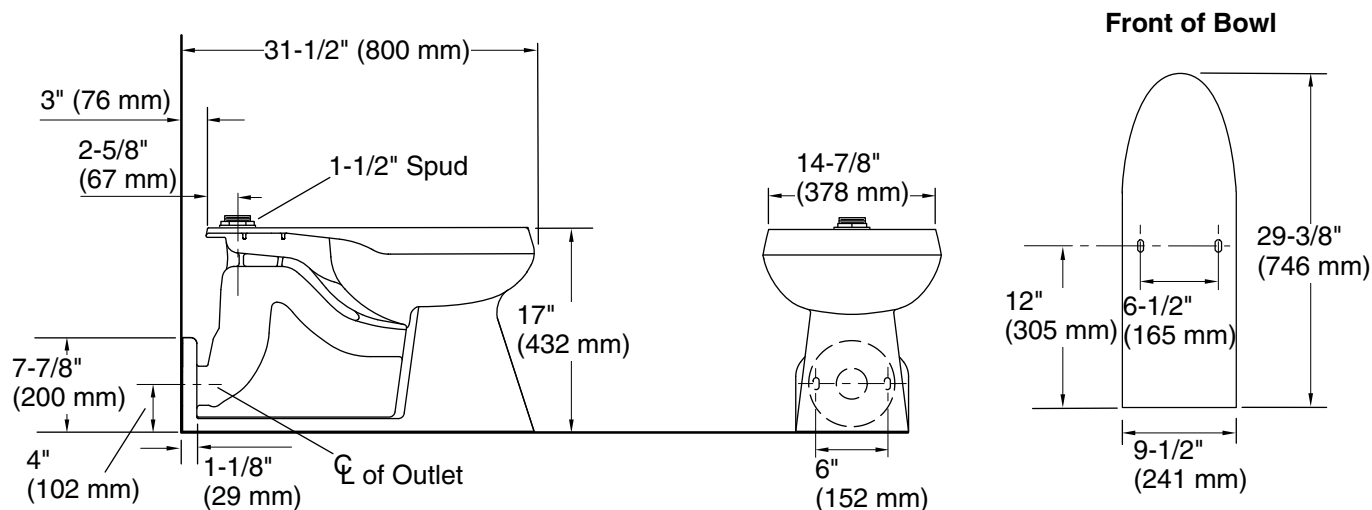

Product Diagram