KOHLER®

Roughing-In

K-438
HIGH-FLOW VALVE SYSTEM

Product Information

Applicable product:	
1/2″ ceramic high-flow valve system with diverter	K-438-K

Installation Notes

Install this product according to the installation guide.

Finished Deck-Mount Installation

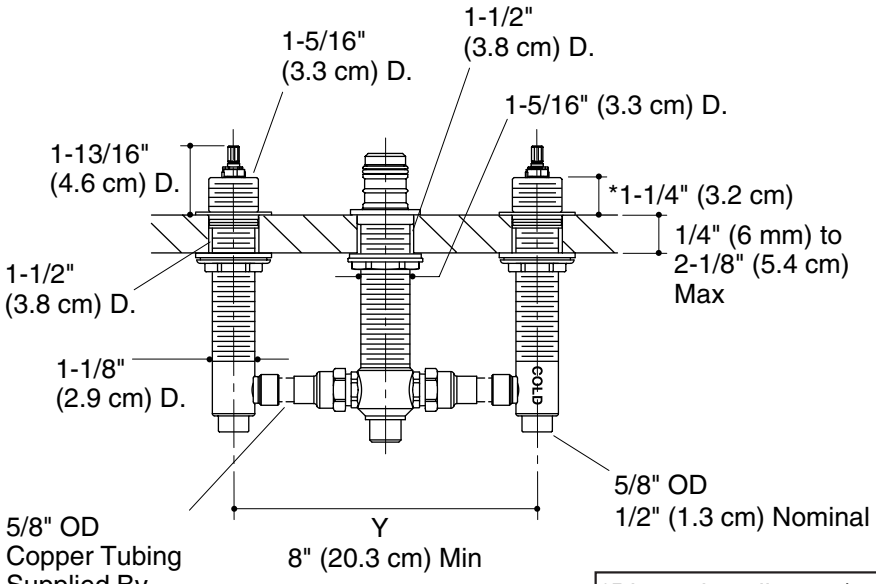

Finished Rim-Mount Installation

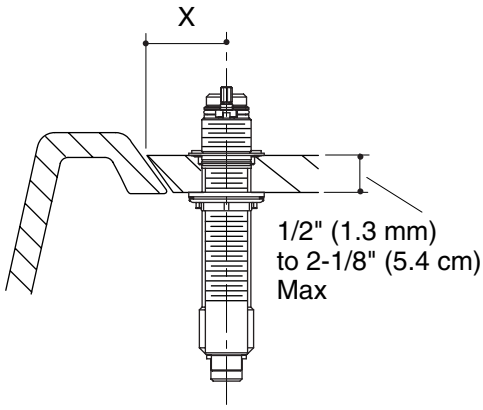

*Dimension allows +/-1/4" (6 mm) handle adjustment during handle trim installation.
X = Distance from centerline of spout inlet to front of spout base plus 1/2" (1.3 cm).
Y = Distance between valve body centerlines vary. Minimum distance is 8" (20.3 cm).