


## Features

- Metal and carbon fiber construction
- Brass valve bodies
- Articulating spout
- Quarter-turn washerless ceramic disc valves
- Flexible connections for easy installation
- Integral sprayhead
- For 8" (20.3 cm) or 16" (40.6 cm) centers
- ADA compliant lever handle
- Touch-activated drain with tailpiece and overflow
- Variable spout reach from less than 2" (5.1 cm) to 6" (15.2 cm)
- 1.5 gpm (5.7 lpm) maximum flow rate

## WIDESPREAD LAVATORY FAUCET K-6274

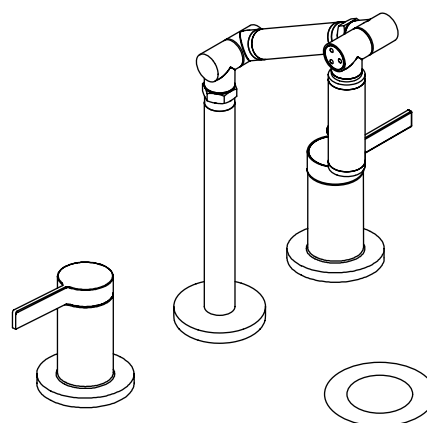

## Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations
- EPA WaterSense®

## Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

## Accessories

- NA: None applicable

## Specified Model

| Model                       | Description                                 | Colors/Finishes             |                                      |
|-----------------------------|---|-----------------------------|--------------------------------------|
| K-6274-C11                  | Widespread lavatory faucet with silver tube | <input type="checkbox"/> CP | <input type="checkbox"/> Other _____ |
| K-6274-C12                  | Widespread lavatory faucet with black tube  | <input type="checkbox"/> CP | <input type="checkbox"/> Other _____ |
| <b>Optional Accessories</b> |   |                             |                                      |
| 1102407                     | Deep roughing-in kit – spout                | <input type="checkbox"/> NA |                                      |
| 1131486                     | Deep roughing-in kit – handles              | <input type="checkbox"/> NA |                                      |

## Product Specification

The two-handle widespread lavatory faucet shall be made of metal and carbon fiber construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature quarter-turn washerless ceramic disc valves and flexible connections for easy installation. Product shall have an articulating spout with integral sprayhead. Product shall feature variable spout reach from less than 2" (5.1 cm) to 6" (15.2 cm). Product shall be for 8" (20.3 cm) or 16" (40.6 cm) centers. Product shall feature ADA compliant lever handles. Product shall have a touch-activated drain with tailpiece and overflow. Faucet shall be Kohler Model K-6274-\_\_\_\_-\_\_\_\_.

## Installation Notes

Technical drawing of the Touch-Activated Drain assembly, showing side and front views with dimensions in inches and centimeters.

**Side View Dimensions:**

- Overall width: 16" (40.6 cm) Max
- Top mounting bracket width: 8" (20.3 cm) Min
- Mounting bracket height: 2-1/8" (5.4 cm)
- Mounting bracket width: 2-5/16" (5.9 cm)
- Mounting bracket depth: 1-7/8" (4.8 cm) D.
- Mounting bracket thickness: 5/8" (1.6 cm) With Dished Washer
- Mounting bracket height: 7-1/4" (18.4 cm)
- Mounting bracket diameter: 1-1/4" D.
- Mounting bracket height: 1-3/8" (3.5 cm) Max Less Dished Washer
- Mounting bracket height: 1-7/8" (4.8 cm) D.
- Mounting bracket height: 8-15/16" (22.7 cm)

**Front View Dimensions:**

- Top mounting bracket width: 6" (15.2 cm) Max
- Top mounting bracket height: 4-1/4" (10.8 cm)
- Top mounting bracket diameter: 2-1/8" (5.4 cm) D.
- Top mounting bracket height: 3-11/16" (9.4 cm)
- Top mounting bracket height: 5-1/16" (12.9 cm)
- Top mounting bracket height: 3-3/4" (9.5 cm)
- Top mounting bracket diameter: 1-1/4" OD

**Touch-Activated Drain**

KARBON® WIDESPREAD LAVATORY FAUCET  
Page 2 of 2  
1139300-4-B