

Features

- Multiple configuration options for opening widths from 30" (762 mm) to 72" (1829 mm)
- Walk through height of 75" (1905 mm)
- Available in 1/4" (6 mm) or 3/8" (10 mm) thick tempered glass
- Optional steam-sealing enclosure
- Easy adjustment for out-of-plumb conditions
- CleanCoat® glass coating for easy glass care and maintenance
- 3" (76 mm) width adjustment
- 1/2" (13 mm) height adjustment
- 3/8" (10 mm) out-of-plumb adjustment


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)
- CPSC 16CFR 1201 CAT II

PIVOT SHOWER DOOR K-705800

ALSO K-705802, K-705804, K-705806

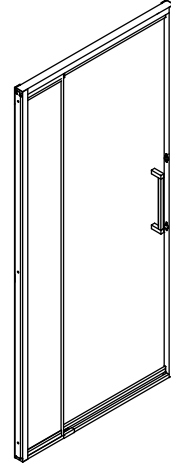

Colors/Finishes

- SH: Bright Silver
- NX: Brushed Nickel
- ABV: Brushed Bronze

Specified Model

Model	Description	Application	Glass Thickness	Frame Finishes/Colors		
K-705800-L	Pivot shower door	Shower	1/4" (6 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705802-L	Pivot shower door	Shower	1/4" (6 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705804-L	Pivot shower door	Shower	1/4" (6 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705806-L	Pivot shower door	Shower	1/4" (6 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705808-L	Pivot shower door	Shower	1/4" (6 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705810-L	Pivot shower door	Shower	1/4" (6 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705812-L	Pivot shower door	Shower	1/4" (6 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705814-L	Pivot shower door	Shower	3/8" (10 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-705816-L	Pivot shower door	Shower	3/8" (10 mm)	<input type="checkbox"/> SH	<input type="checkbox"/> NX	<input type="checkbox"/> ABV

Product Specification

The pivot shower door shall offer multiple configuration options for opening widths from 30" (762 mm) to 72" (1829 mm). Product shall have pivot panel with a walk through height of 75" (1905 mm). Product shall be available in 1/4" (6 mm) or 3/8" (10 mm) thick tempered glass. Product shall have optional steam-sealing enclosure and CleanCoat™ glass coating for easy glass care and maintenance. Product shall be easy adjustment for out-of-plumb conditions. Product shall have 3" (76 mm) of width adjustment, 1/2" (13 mm) height adjustment, and 3/8" (10 mm) of out-of-plumb adjustment. Pivot shower door shall be Kohler Model K-_____.

Model	Description	Application	Glass Thickness	Frame Finishes/Colors
K-705818-L	Pivot shower door	Shower	3/8" (10 mm)	<input type="checkbox"/> SH <input type="checkbox"/> NX <input type="checkbox"/> ABV
K-705820-L	Pivot shower door	Shower	3/8" (10 mm)	<input type="checkbox"/> SH <input type="checkbox"/> NX <input type="checkbox"/> ABV
K-705822-L	Pivot shower door	Shower	3/8" (10 mm)	<input type="checkbox"/> SH <input type="checkbox"/> NX <input type="checkbox"/> ABV
K-705824-L	Pivot shower door	Shower	3/8" (10 mm)	<input type="checkbox"/> SH <input type="checkbox"/> NX <input type="checkbox"/> ABV
K-705826-L	Pivot shower door	Shower	3/8" (10 mm)	<input type="checkbox"/> SH <input type="checkbox"/> NX <input type="checkbox"/> ABV

Installation Notes


Install this product according to the installation guide.

NOTICE: To install as a steam enclosure, the typical vertical opening for a steam door is 76-3/4" (1950 mm) with a minimum height of 76-5/8" (1946 mm) and a maximum height of 77" (1956 mm).

NOTICE: To install as a non-steam enclosure, the vertical opening should be 76-5/8" (1946 mm) or greater.

Recommended two person installation.

Model	A (Min-Max)	B (Min-Max)	C
K-705800 K-705814	30" (762 mm) - 33" (838 mm)	20-1/4" (514 mm) - 23-1/4" (591 mm)	6-1/2" (165 mm)
K-705802 K-705816	33" (838 mm) - 36" (914 mm)	20-1/4" (514 mm) - 23-1/4" (591 mm)	9-1/2" (241 mm)
K-705804 K-705818	36" (914 mm) - 39" (991 mm)	23-1/4" (591 mm) - 26-1/4" (667 mm)	9-1/2" (241 mm)
K-705806 K-705820	39" (991 mm) - 42" (1067 mm)	23-1/4" (591 mm) - 26-1/4" (667 mm)	12-1/2" (318 mm)
K-705808 K-705822	45" (1143 mm) - 48" (1219 mm)	29-1/4" (743 mm) - 32-1/4" (819 mm)	12-1/2" (318 mm)
K-705810 K-705824	57" (1448 mm) - 60" (1524 mm)	29-1/4" (743 mm) - 32-1/4" (819 mm)	24-1/2" (622 mm)
K-705812 K-705826	69" (1753 mm) - 72" (1829 mm)	29-1/4" (743 mm) - 32-1/4" (819 mm)	36-1/2" (927 mm)

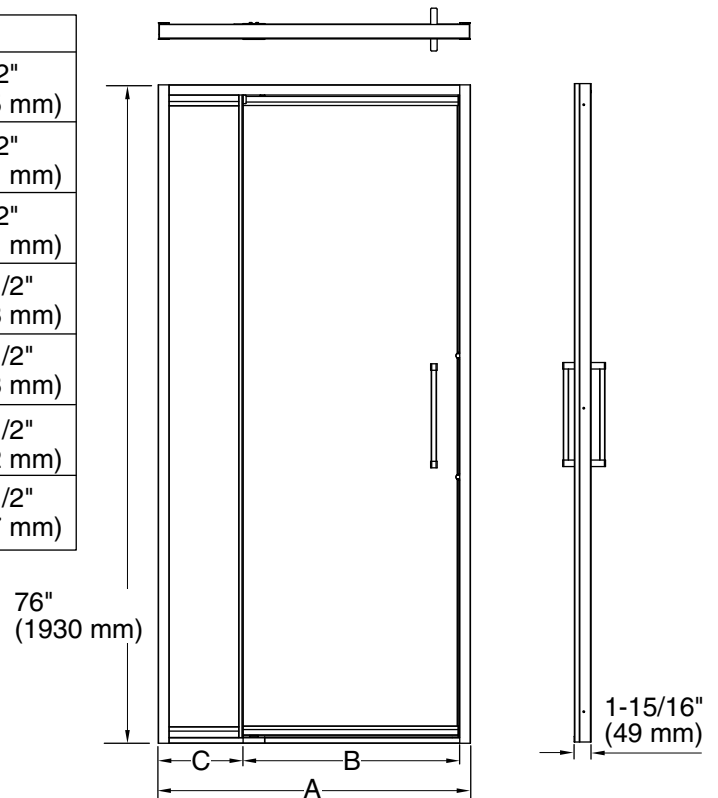

Product Diagram