# **KOHLER**®

#### Features

- Cast iron with Safeguard<sub>®</sub> finish
- ADA compliant when installed per Section 607 of the Act
- 60" (152.4 cm) x 32" (81.3 cm) x 15-1/2" (39.4 cm)

### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ADA
- ASME A112.19.1/CSA B45.2
- ICC/ANSI A117.1



### **Colors/Finishes**

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

#### Specified Model

Model	Description			Colors/Finishes			
K-875	Bath with apron – left drain		0 🗆	🗆 Othe	r		
K-876	Bath with apron – right drain (shown)			D Othe	Other		
Required Accessories							
K-7214	Clearflo cable bath drain, less PVC tubing	🗅 CP	C Othe	□ Other			
K-7261	Fitting/pipe kit				🗆 NA		

#### **Product Specification**

The bath with apron shall be made of cast iron with Safeguard finish. Bath shall be 60'' (152.4 cm) in length, 32'' (81.3 cm) in width, and 15-1/2'' (39.4 cm) in height. Bath shall be ADA compliant when installed per Section 607 of the Act. Bath shall be Kohler Model K-\_\_\_\_\_.

## **BELLWETHER**<sub>TM</sub>

#### **Technical Information**


Fixture*:				
Bathing well:				
Basin area, bottom	41-1/4″ (104.8 cm) x 18-3/16″ (46.2 cm)			
Basin area, top	51-1/4″ (130.2 cm) x 23-5/16″ (59.2 cm)			
Weight	298 lbs (135.2 kg)			
To overflow:				
Water depth	11-5/16" (28.7 cm)			
Capacity	44 gal (166.6 L)			
* Approximate measurements for comparison only.				

#### **Installation Notes**

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 52 lbs/square foot (252.8 kg/square meter) loading.

No change in measurements if connected with drain and fitting/pipe kit illustrated. (K-7214 and K-7261)

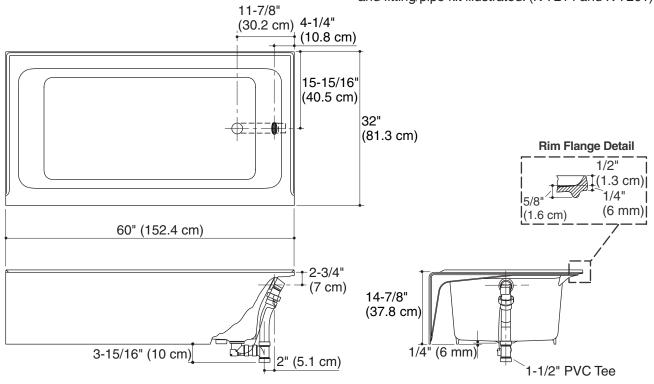

**Product Diagram** 

