

Features


- Cast iron with Safeguard® finish
- Center drain outlet
- Drop-in or tile-in installation
- 48" (121.9 cm) x 36" (91.4 cm) x 4" (10.2 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO/UPC
- ASME A112.19.1M
- CSA B45

ENAMELED CAST IRON SHOWER RECEPTOR K-9025, K-9026

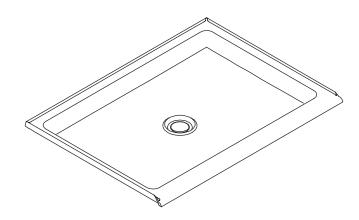

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- · CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

□ PB

□Other

NA: None applicable

□ NA

□ CP

Specified Model

Model	Description		Colors/Finishes	
K-9025	Kathryn® receptor with center drain (honeycomb Safegua	□ 0	☐ Other	
K-9026	Purist _® receptor with center drain (rectangular Safeguard pattern)		0	□ Other
,		Colors/Finishes		
Optional Accessories		Colors/Fi		
K-9027	Teak shower grate	□NA		

Product Specification

Steam generator

Steam generator control kit

The enameled cast iron shower receptor shall be 48" (121.9 cm) in length, 36" (91.4 cm) in width, and 4" (10.2 cm) in height. Shower receptor shall have Safeguard finish, center drain, and allow for drop-in or tile-in installation. Product shall be Kohler Model K-_____-___.

K-1679-PC

K-1647-PC

Technical Information


Fixture*:		
Weight	175 lbs (79.4 kg)	
Drain Outlet	3-3/8" (8.6 cm) D.	
Configuration	1-piece	
*Approximate measurements for comparison only.		

Installation Notes

Install this product according to the installation guide.

The dimensions are applicable for this product only and should not be used to fabricate substitute bases for shower enclosures.

The K-1679-PC steam generator and the K-1647-PC steam generator control kit are designed for use with this product. Kohler shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.

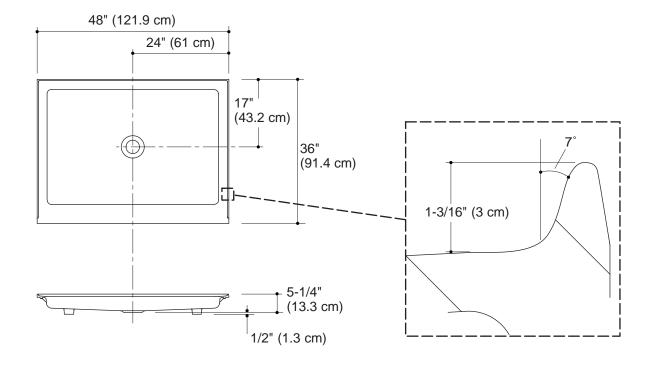

Product Diagram

