


FEATURES

- Brass construction
- Available with square or lever handle
- Intended for use with Rite-Temp or Hi Flow Rite-Temp valves

BATH AND SHOWER FAUCET TRIM K-T6900

ALSO K-T6902, K-T6904, K-304,
K-306-KS

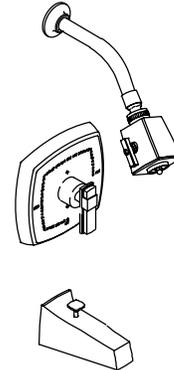

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME/ANSI A112.18.1M
- ASSE/ANSI 1016
- CSA B125 (K-T6900, K-T6902)
- IAPMO/UPC (K-T6900, K-T6902)

COLORS/FINISHES

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Faucets Price Book for additional finishes

SPECIFIED MODEL: For complete faucet, both faucet trim and Rite-Temp valve must be specified.

Model	Description				 ADA		
		<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____	<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____
K-T6900-2	Bath and Shower Trim, Square Handle	<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____			
K-T6900-4	Bath and Shower Trim, Lever Handle				<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____
K-T6902-2	Shower Only Trim, Square Handle	<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____			
K-T6902-4	Shower Only Trim, Lever Handle				<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____
K-T6904-2	Valve Only Trim, Square Handle	<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____			
K-T6904-4	Valve Only Trim, Lever Handle				<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Oth- er_____

Required Accessory			
--------------------	---	---	---

PRODUCT SPECIFICATION	<input type="checkbox"/> NA		
Rite-Temp pressure-balancing single-lever control bath and shower faucet trim shall be of brass construction. Bath and shower trim shall include showerhead with arm and flange, faceplate with handle, and 4-7/8" diverter spout with N.P.T. connection. K-306-KS Hi Flow Rite-Temp Valve With Integral Stops	<input type="checkbox"/> NA		
Shower only trim shall include showerhead with arm and flange, and faceplate with handle. Valve only trim shall include faceplate with handle. Faucet trim shall be K-T_____ - _____ - _____ and Rite-Temp valve shall be K-304-_____ -NA OR K-306-KS-NA Hi Flow Rite-Temp valve.			

Optional Accessories on Page 2.

Optional Accessories

K-9917		Large Handle Stone Inset, Single			<input type="checkbox"/> Other_____
K-9923		Large Handle Metal Inset, Single	<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Other_____
K-9926		Large Handle Ceramic Inset, Single			<input type="checkbox"/> Other_____
K-9932		Large Handle Champleve Inset, Single			<input type="checkbox"/> Other_____
K-9971		Small Lever Metal Inset, Single	<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Other_____
K-9985		Small Lever Stone Inset, Single			<input type="checkbox"/> Other_____
88526		Hi Flow Rite-Temp Thin Wall Installation Kit	<input type="checkbox"/> CP	<input type="checkbox"/> P B	<input type="checkbox"/> Other_____

PRODUCT INFORMATION




WARNING: Risk of damage to the K-306-KS valve assembly. When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).

INSTALLATION NOTES

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7 to 18" with single elbow between valve and wall-mount spout.

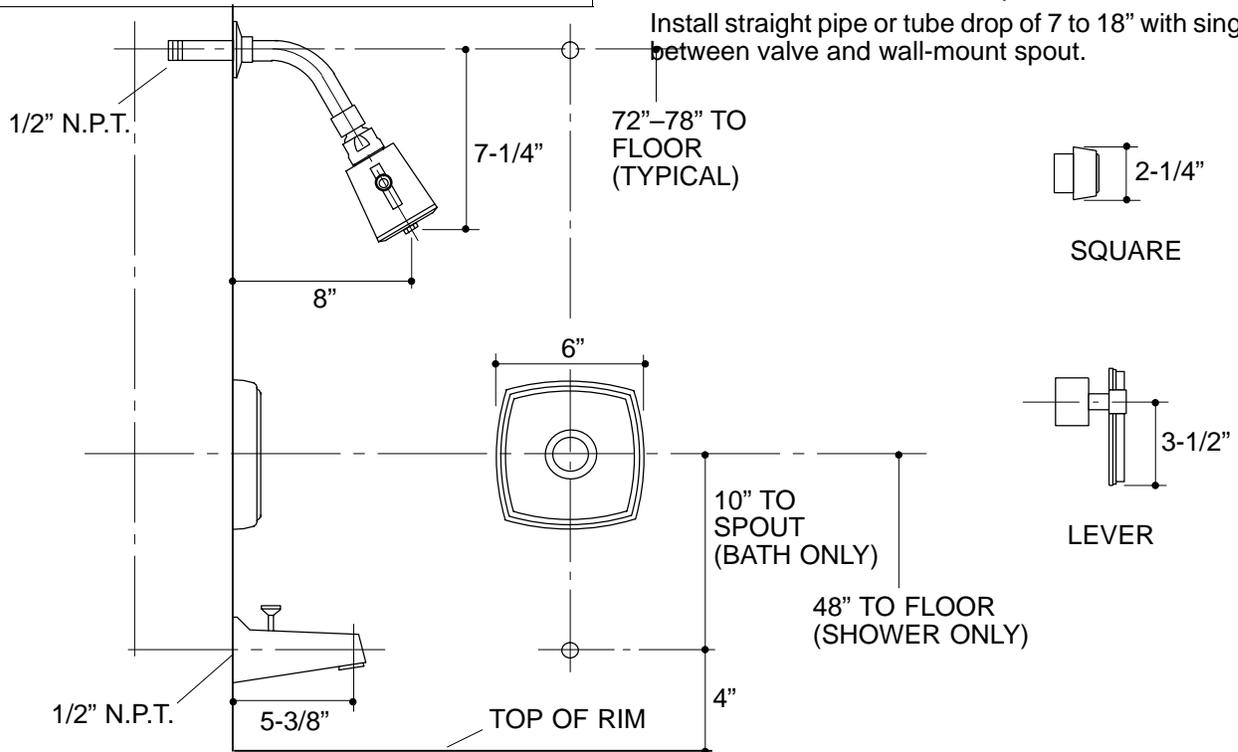

18

PRODUCT DIAGRAM