

Features

- Premium construction ensures durability and reliability
- 4-7/8" (124 mm) diverter spout with slip-fit connection
- Reversible 1/2" quarter-turn washerless ceramic disc valves
- Lever handles
- Includes showerhead with arm and flange

Required Products/Accessories

For wall-mount installation
K-302-K 1/2" Ceramic In-Wall Valve System

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

56374 Elongated Escutcheons



Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992


KOHLER[®] Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
---	----	-----------------

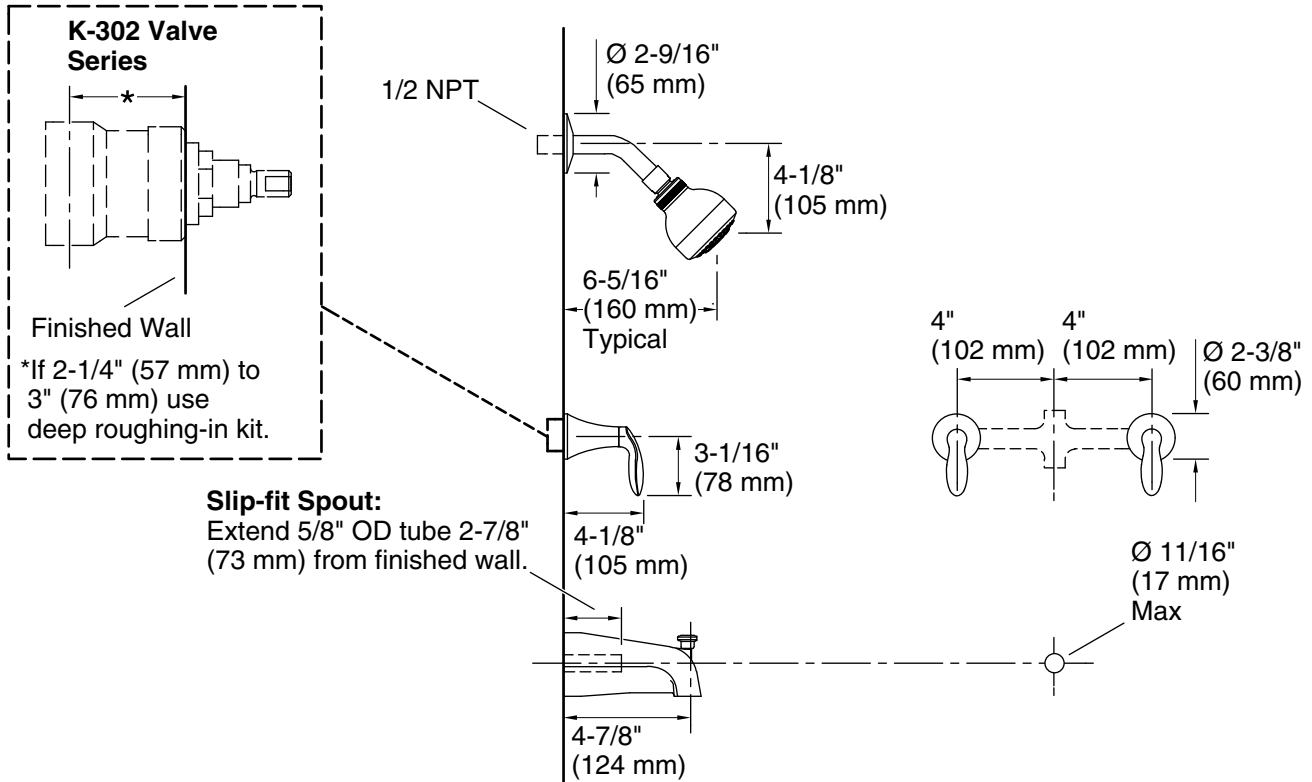

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

flow:

Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation guide.