

**WALL-MOUNT BATHROOM SINK
FAUCET TRIM
K-T448**

Features


- Brass construction
- Dual control wall-mounted
- Less drain
- Stationary spout
- 8-1/4" (206 mm) spout reach
- ADA compliant Stately cross handles
- 1.5 gallons (5.7 liters) per minute maximum flow rate



Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- EPA WaterSense®
- All applicable US Federal and State material regulations

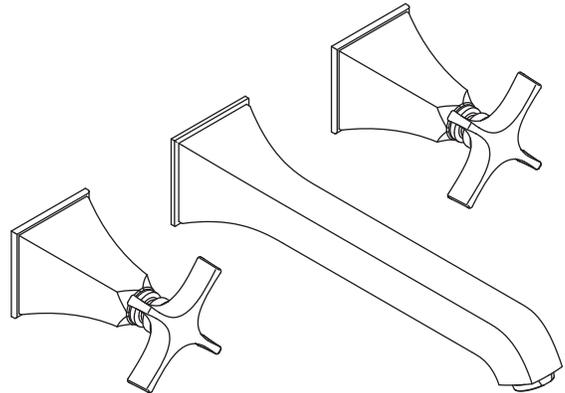

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- NA: None applicable
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/Finishes | |
|-----------------------------|--------------------------------------|---|--------------------------------------|
| K-T448-3S | Wall-mount bathroom sink faucet trim | <input type="checkbox"/> CP | <input type="checkbox"/> Other _____ |
| Required Accessories | |  | |
| K-410-K | Two-handle ceramic valve | <input type="checkbox"/> NA | |

Product Specification

The wall-mount bathroom sink faucet trim shall be of brass construction. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall be dual control wall-mounted. Product shall feature a 8-1/4" (206 mm) spout reach, stationary spout, and ADA compliant Stately cross handles. Product shall be less drain. Faucet shall be Kohler Model K-T448-3S - ____ with required K-410-K-NA valve.


| Optional Accessories | | | | |
|----------------------|---|-----------------------------|-------------------------------------|-----------------------------|
| K-7114 | Under-mount pop-up bathroom sink drain with tailpiece OR | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ | |
| K-7124 | Touch activated bathroom sink drain with tailpiece OR | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ | |
| K-7127 | Bathroom sink drain with non-removable metal stopper and tailpiece – 3" rough OR | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ | |
| K-7129 | Bathroom sink grid drain with tailpiece | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ | |
| _____ | Additional flow options are available (refer to the Kohler Price Book) | | | <input type="checkbox"/> NA |

Installation Notes

Install this product according to the installation guide.

A minimum distance of 1-1/2" (38 mm) to 6" (152 mm) must be maintained between the bottom of the spout and the top of the fixture rim.

Three 1-1/2" (38 mm) diameter cut-out holes are required for the spout and handles.

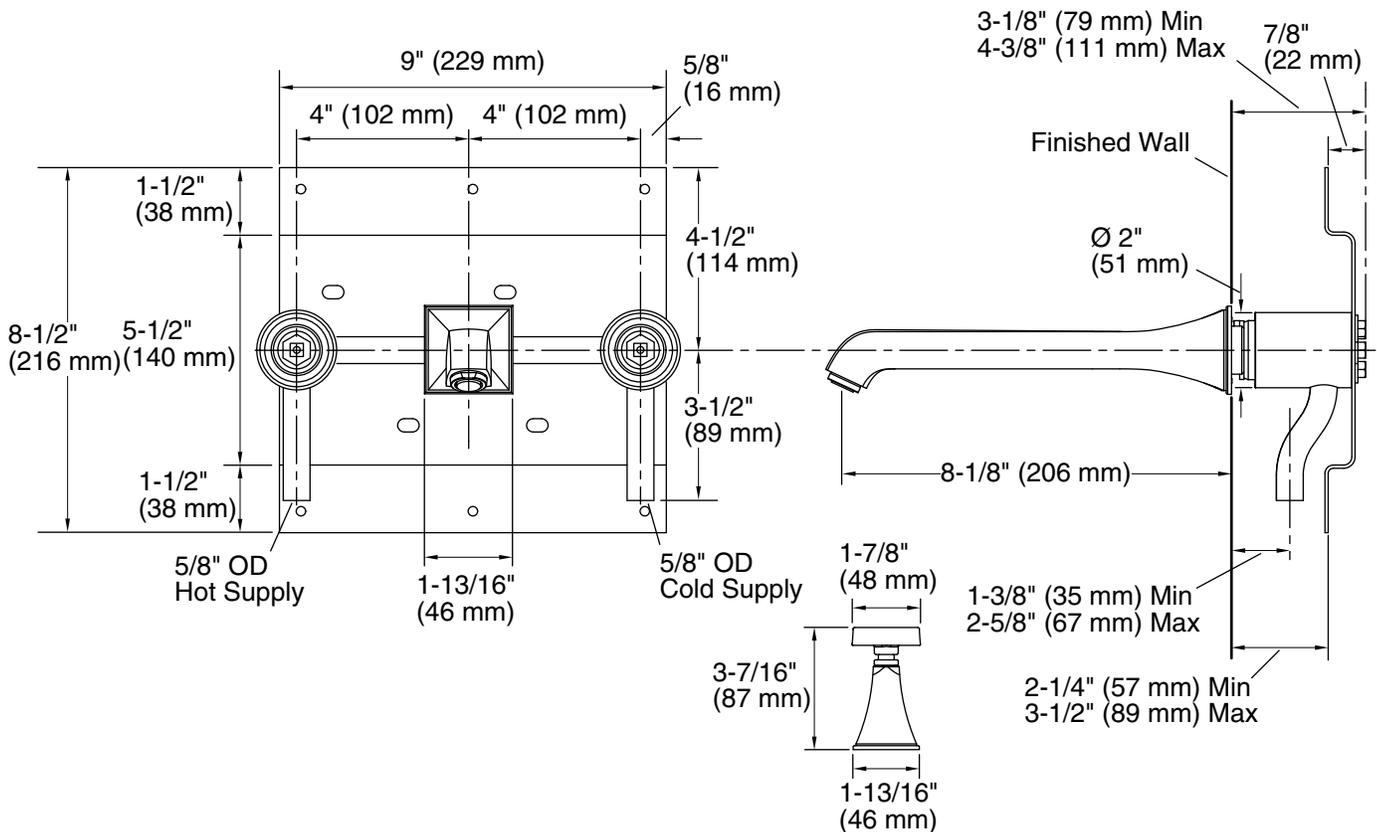

Product Diagram