

Specifications



LEVEL™ Single Handle Single Hole Mount High Arc Bar/Prep Faucet

Models: 5100 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- · High arc spout provides the height and reach to fill or clean large pots
- Single hole mounting
- Flexible supply lines with 3/8" compression fittings
- 360° rotating spout provides ability to install handle on either side

OPERATION

- Single handle lever
- Temperature controlled by 100° arc of handle travel

FLOW

• Spout flow is limited to 2.0 gpm max (7.6L/min) at 60 psi

CARTRIDGE


• 1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act
- ADA 🕒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

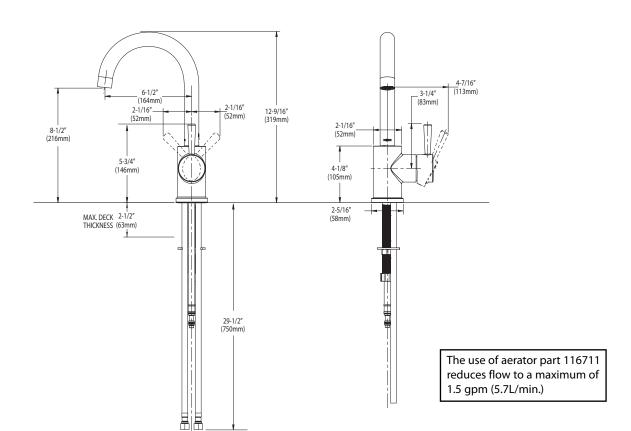

CRITICAL DIMENSIONS

(DO NOT SCALE)

03/01/2012 SPC10771 50/00/0116861 Released 01

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com