

## DESCRIPTION

- Metal construction with either chrome plated, antique brass or LifeShine® polished brass
- For installations from 8" (203mm) to 10" (254mm) centers
- Designed to be installed on decks up to 2-3/4" (70mm) or on finished decks of 1/2" (38mm)
- The tub fill spout is a slip fit design and the supplies are 1/2" type K, copper tubing

## OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

## FLOW

- Designed to deliver 18 gpm at 40 psi.

## CARTRIDGE


- 1248 cartridge design
- Nonmetallic and stainless steel materials

## STANDARDS

- Designed and manufactured to comply with the applicable requirements of: CSA B-125 and ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

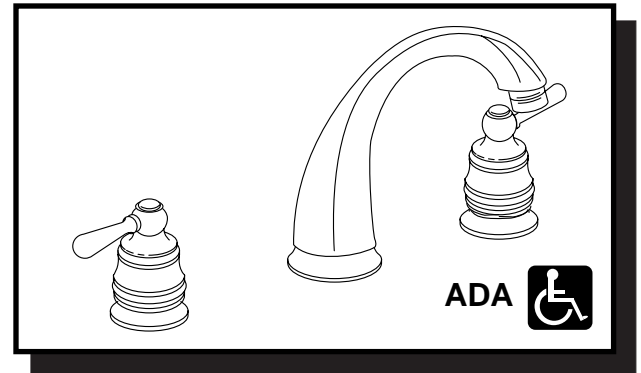

**TRADITIONAL®**  
**Two-Handle Roman Tub Valve and Trim**

**Models: 6997, 6997A, 6997P**

**NOTE: See reverse side for illustrated parts**

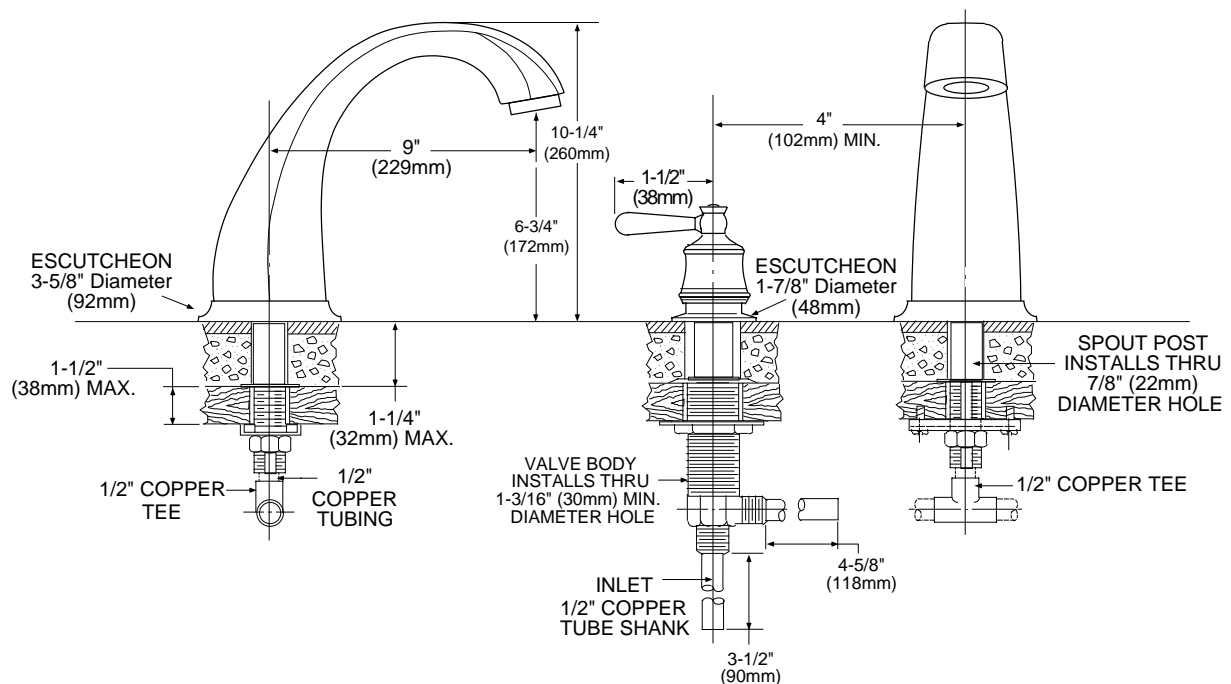

**NOTE: THE INSTALLATION SHOWN IS FOR TILE DECKS, THIS VALVE WILL ALSO FIT STEEL, CAST IRON OR PLASTIC DECKS**

## CRITICAL DIMENSIONS

(DO NOT SCALE)