

FAUCET DESCRIPTION

- Brass construction with chrome plated finish
- 1/2" IPS connections
- Supplied with gooseneck spout (8137)

OPERATION

- Lever style handle
- Temperature controlled through 110° arc of handle
- Operates with less than 5 pounds of force

FLOW

- Aerator is limited to 2.2GPM Max (8.34 Min.)

CARTRIDGE


- Ceramic disc cartridge (with temperature limit stop)
- Nonmetallic/nonferrouse and ceramic material

STANDARDS

- Third party certified to meet CSA B-125.1, ASME A112.18.1, ICC A117.1 and all applicable specifications referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  for lever handle

WARRANTY


- Warranted for five years against material or manufacturing defects

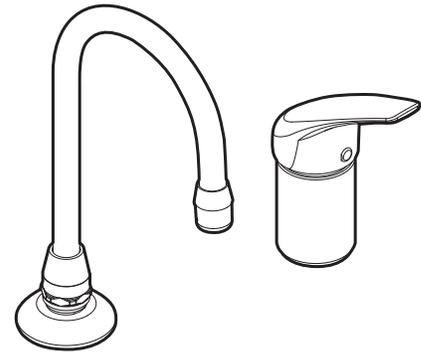

Single Handle Multi-Purpose Faucet

Models: 8137
8125 (less spout)

NOTE: Designed to be installed through 2 holes - 1-1/2" min. dia.

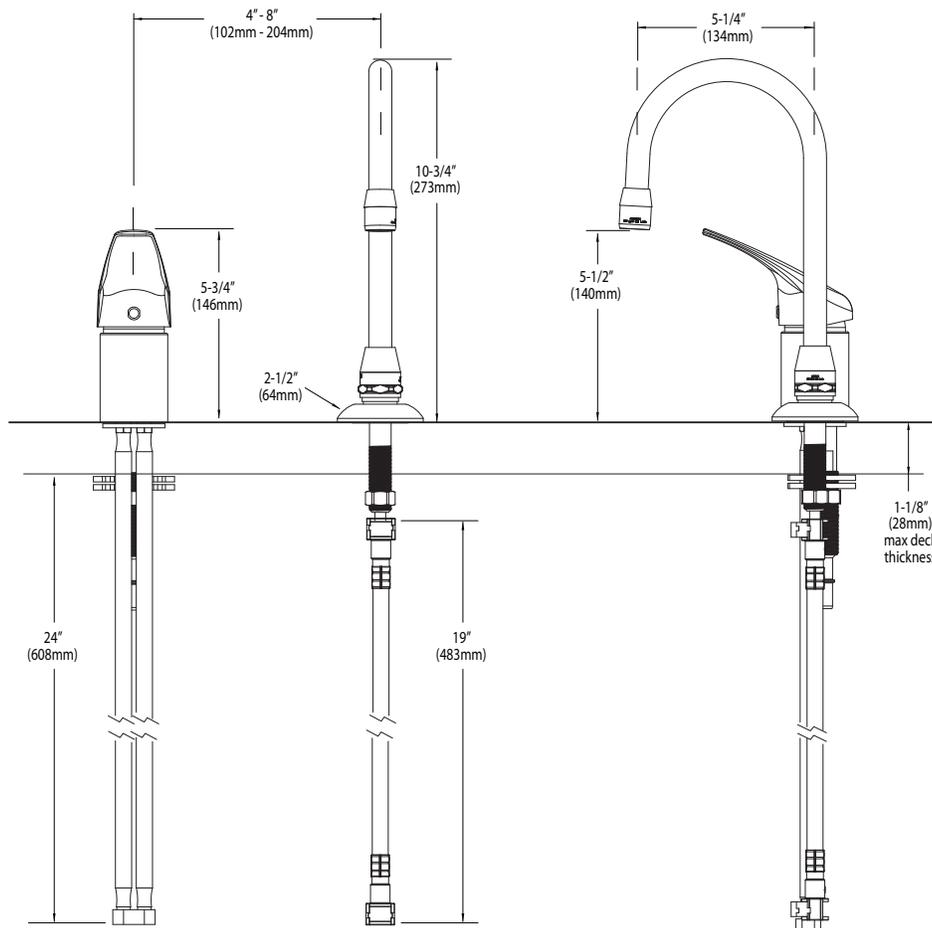

CRITICAL DIMENSIONS

(DO NOT SCALE)