

DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design with 1/4 turn stops
- 3 function transfer valve
- 1/2" CC connections
- Contains: stationary showerhead, hand-held shower, 69" metal hose, 30" slide bar, drop ell, vacuum breaker and tub filler.

Slide bar is NOT DESIGNED TO BE A GRAB BAR.

- Applicable components are supplied with vandal resistant screws

OPERATION


- Temperature and transfer valves both have ADA compliant lever style handles
- Temperature handle operates counterclockwise through a 270° arc with off at 6 o'clock, and the maximum hot at the 9 o'clock position
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°
- Transfer valve operates 3 distinct functions

FLOW

- 2.5 gpm (9.5L/min) hand-held shower and stationary shower head

CARTRIDGE

- 1222 cartridge design in temperature control valve accommodates back to back installations
- Ceramic disc cartridge in transfer valve

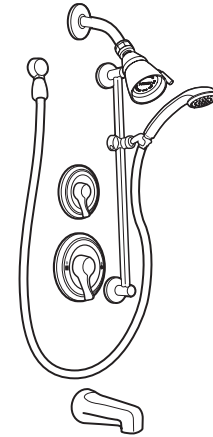

Three-Function Commercial Tub/Shower System


Model: 8343

STANDARDS

- Designed and manufactured to meet CSA B-125 and ASME A112.18.1M and all applicable specifications referenced therein and complies with applicable requirements of ANSI A117.1

WARRANTY

- Warranted for 5 years against material or manufacturing defects

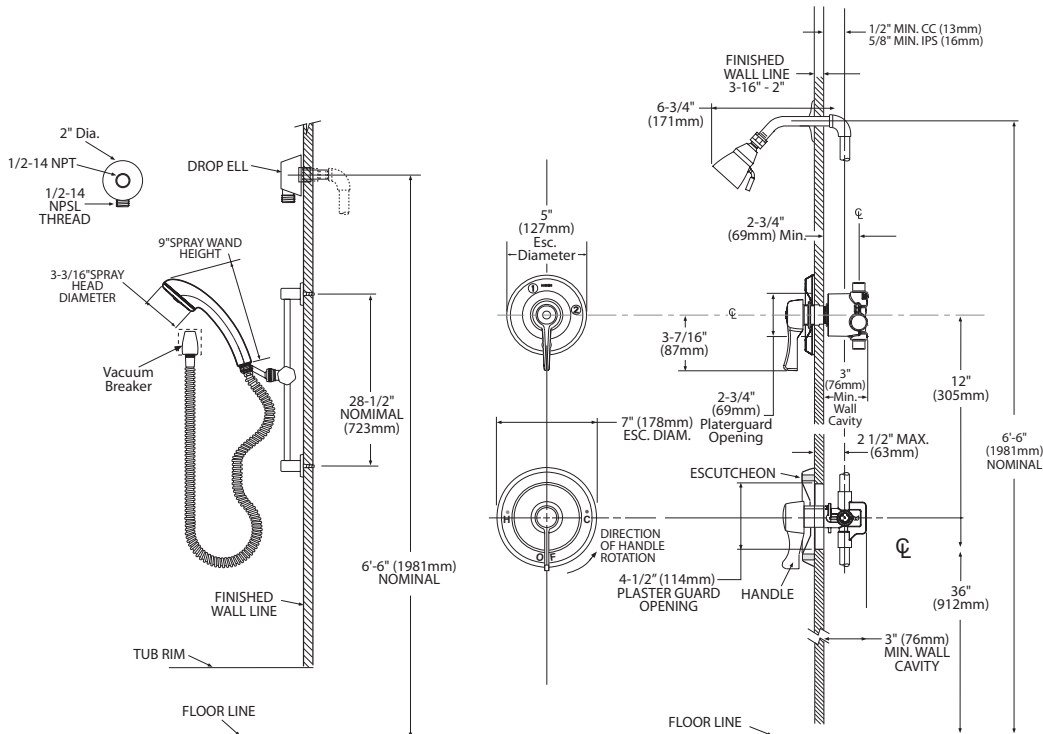

NOTE: This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.

CRITICAL DIMENSIONS

(DO NOT SCALE)