

Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- **Brass construction**
- 1/2" IPS connections
- Includes pop-up waste assembly

OPERATION

Maximum handle rotation angle is 90° to full on for either handle

CARTRIDGE

• 1224 cartridge design with nonmetallic and stainless steel materials

STANDARDS


When Trim Kit is added to M•Pact valve, the product is:

- Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1
- Certified to ANSI/NSF 61/9
- Complies with the California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

Rev. 6/06

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




M•PACT VALVE Mini-Widespread Lavatory Rough-in Valve

Models: 9300, 69300 (69300-Bulk Packed 6 per carton)

NOTE: THIS VALVE IS DESIGNED TO BE INSTALLED THRU 3 HOLES. 1-1/8" (29mm) MIN. DIA.

NOTE: MAXIMUM HOLE DIA. 1.25"

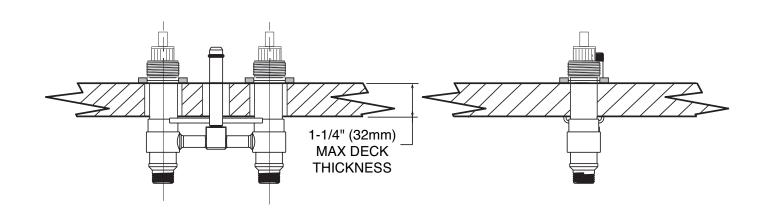

CRITICAL DIMENSIONS

(DO NOT SCALE)

www.moen.com