



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Chrome plated metal construction with various finishes identified by suffix
- 1/2" IPS connections

## OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel


## FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)

## CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

## STANDARDS

- Third party certified by WaterSense,® CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act
- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## VILLETA™

### Single-Handle Lavatory Faucet

#### With Metal Waste Assembly

**Models:** L4721 series, L4725 series  
**Bulk Pack (12 per carton)**

**Model:** L64721 series, L64725 series


#### With 50/50 Waste Assembly

**Model:** L84721 series

**Bulk Pack (12 per carton)**

**Models:** L64751 series, L64755 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 4" ON CENTER

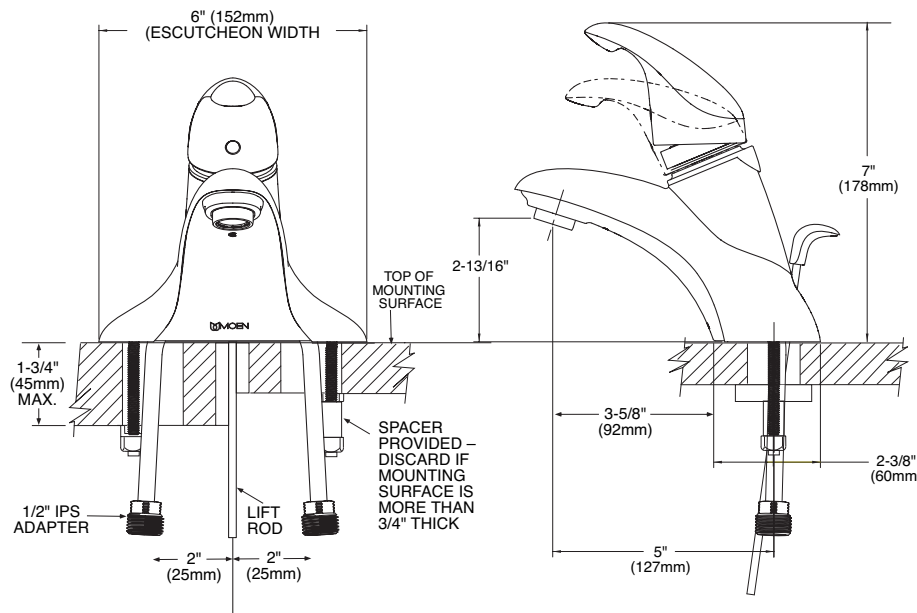

## CRITICAL DIMENSIONS

(DO NOT SCALE)