



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with chrome plated, antique nickel, oil rubbed bronze, wrought iron, Lifeshine® brushed nickel, LifeShine® brushed bronze, pewter or antique bronze finish
- Includes 7" rainshower showerhead, arm and flange

## OPERATION

- Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction
- Temperature lever operates through a 340° arc with maximum cold at full clockwise rotation and maximum hot at full counter clockwise rotation
- Factory established temperature range from 70°F (21°C) to 120°F (49°C)
- Safety stop preset at 105°F (41°C)
- Safety stop over-ride allows maximum 120°F (49°C)

## FLOW

- Showerhead limited to 2.5 gpm (9.5 L/min)

## CARTRIDGE


- 130156 thermostatic cartridge design with nonmetallic/nonferrous materials
- 130157 ceramic disc cartridge design

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including ASSE 1016

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




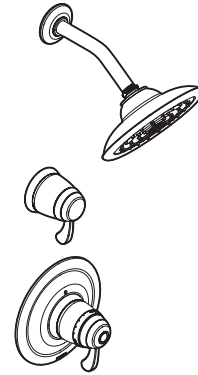


**ExactTemp®**

**3/4" Thermostatic Shower (Trim Only)**

**Models:** TL3400, TL3400ORB, TL3400AN, TL3400BB, TL3400BN, TL3400WR, TL3400PW, TL3400AZ, TL3400BB

**Valves:** 3371, 3600  
(Sold separately)

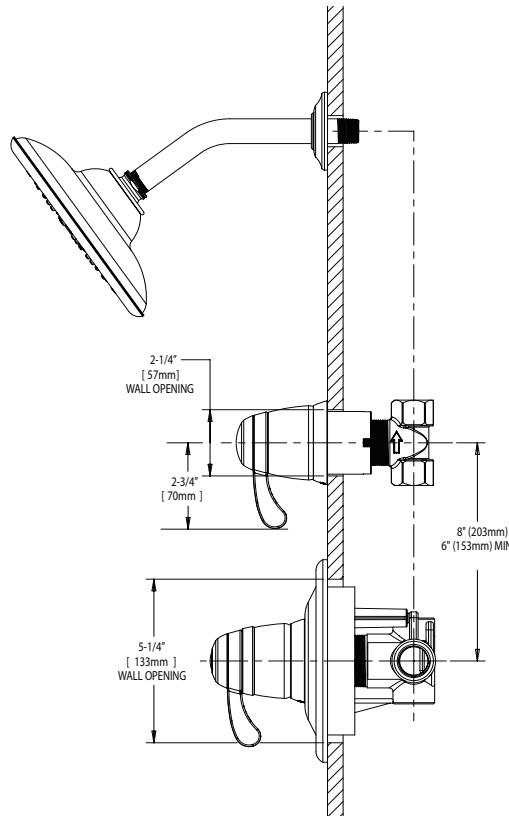

## CRITICAL DIMENSIONS

(DO NOT SCALE)