ACRYLLUS SERIES 'INTEGRAL DOME' SHOWER STALL





48-INCH MODEL



SHA-DM-4833 SHA-DM-4833RS (right seat) SHA-DM-4833LS (left seat)

Rough-In Dimen.	48" wide x 34" deep x 89-3/8" high (w/ 4-1/2" dam)
Finished Dimen.	48" wide x 32-3/4" deep x 89-3/8" high (w/ 4-1/2" dam)
Unit Features	 One - Piece Fiberglass Composite Construction Vacuum Formed Acrylic Surface
NAHB RESEARCH CENTER	 3-3/8" Dia. Center Drain (see reverse side for location) Integral Unit Dome (cap) Gelcoat Style Mounting Flanges Low Profile Dam (standard) Generous, Multi-Level Back Wall Shelving Balsa Wood Core Floor Structure


Special Notes

Optional ABF Model (provides 2-1/2-inches of drain clearance)

Open Top Versions Available



SHA-DM-4833 ABF (illustrated)

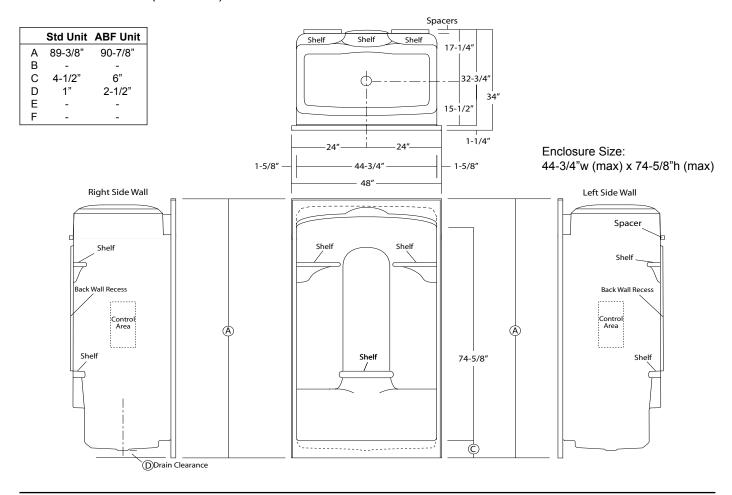

ACRYLLUS 48" Module

Order No.: SHA-DM-4833 (no seat)

48" x 32-3/4", one-piece vacuum formed acrylic shower stall with integral unit cap, multi-level back wall shelving, gelcoat style mounting flanges, 4-1/2" low profile dam (1" drain clearance), wall surround, and center drain.


ACRYLLUS 48" Above Floor Rough-In Module

Order No.: SHA-DM-4833 ABF (no seat - 6" dam)

48" x 32-3/4", one-piece vacuum formed acrylic shower stall with integral unit cap, multi-level back wall shelving, gelcoat style mounting flanges, 6" dam (2-1/2" drain clearance), wall surround, and center drain.



SHA-DM-4833LS ABF (illustrated)

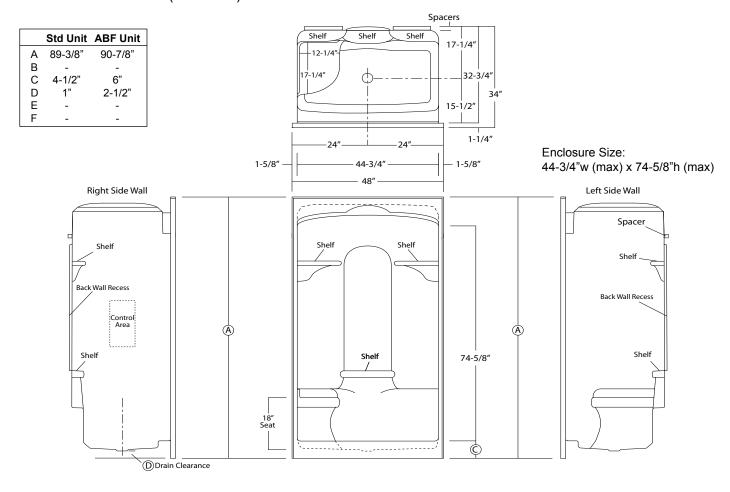

ACRYLLUS 48" Module

Order No.: SHA-DM-4833RS (RH seat) SHA-DM-4833LS (LH seat)

48" x 32-3/4", one-piece vacuum formed acrylic shower stall with integral unit cap, single right or left hand contoured seat, multi-level back wall shelving, gelcoat style mounting flanges, 4-1/2" low profile dam (1" drain clearance), wall surround, and center drain.

ACRYLLUS 48" Above Floor Rough-In Module

Order No.: SHA-DM-4833RS ABF (RH seat - 6" dam) SHA-DM-4833LS ABF (LH seat - 6" dam)

48" x 32-3/4", one-piece vacuum formed acrylic shower stall with integral unit cap, single right or left hand contoured seat, multi-level back wall shelving, gelcoat style mounting flanges, 6" dam (2-1/2" drain clearance), wall surround, and center drain.