


BUILDER SERIES



Home Innovation
LAB CERTIFIED™

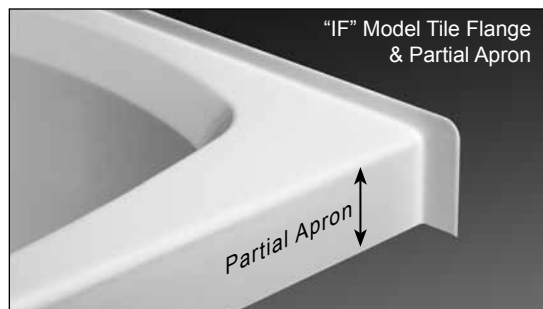

60-INCH WIDE MODELS

Oasis



"S" Model w/ Full Apron & Removable Access Panel

Geneva 3660 (Tile Flange)

Rough-In Dimensions	TR-S-240 / TRG-S-240 TR-IF-240 / TRG-IF-240	60" wide x 37-1/4" deep x 22-1/4" high
---------------------	--	--

Finished Dimensions	TR-S-240 / TRG-S-240 TR-IF-240 / TRG-IF-240	60" wide x 36" deep x 21" high
---------------------	--	--------------------------------

Unit Features

- Vacuum Formed Acrylic or Gelcoat Surface
- 2" Dia. RH or LH Drain (see reverse side for location)
- 2-1/2" Dia. Overflow (see reverse side for location)
- Twin, Contoured Armrests
- "S" Model: Integral Tile Flange & Full Apron
- "IF" Model: Integral Tile Flange & Partial Apron
- Pre-Leveled Block Base System
- Balsa Wood Core Floor Structure
- Textured Floor Pattern

Special Notes

- Whirlpool System Available (see reverse side for details)
- Air System Available (see reverse side for details)
- UL Listed Whirlpool & Air Systems
- Removable Access Panel Included on "S" Model w. System
- Model Available In Self-Rimming Design

Unit / System Order Number

Acrylic:	TR-S-240 R or L Drain / 0ND (soaking tub) TR-S-240 R or L Drain / 6P (Builder System) TR-S-240 R or L Drain / CWS (Carress System) TR-S-240 R or L Drain / AR2 (Revive Air System)
	TR-IF-240 R or L Drain / 0ND (soaking tub) TR-IF-240 R or L Drain / 6P (Builder System) TR-IF-240 R or L Drain / CWS (Carress System) TR-IF-240 R or L Drain / AR2 (Revive Air System)

Unit / System Order Number

Gelcoat:	TRG-S-240 R or L Drain / 0ND (soaking tub) TRG-S-240 R or L Drain / 6P (Builder System) TRG-S-240 R or L Drain / CWS (Carress System)
	TRG-IF-240 R or L Drain / 0ND (soaking tub) TRG-IF-240 R or L Drain / 6P (Builder System) TRG-IF-240 R or L Drain / CWS (Carress System)

System Trim

Standard 6P & CWS Trim (order code): White trim on White unit (WHT) - Bone trim on Bone unit (BON) - Biscuit trim on Biscuit unit (BSC)

Order Number / Description

CWS: *Carress System* includes: 4-Adjustable side jets, 2-rotating foot jets, 2-micro pulse back jets, variable flow control, twin air controls, electronic system control, 13.0 amp pump/motor, and a removable access panel (S model).

Options: In-Line Heater (1*) (order: ILH)
 Ozone Generator (1*) (order: OZG)
 Chromatherapy Pkg (1*, 2*) (order: CLT)
 Water Level Sensor (1*, 2*) (order: LWV)
 Trim Upgrade (1*)
 Chrome (order: CWS-CHR)
 Brushed (Satin) Nickel (order: CWS-SNK)


Order Number / Description

6P: *Builder System* includes: 6-Adjustable jets, twin air controls, pneumatic system control, 5.50 amp pump/motor, and a removable access panel (S model).

Options: In-Line Heater (1*) (order: ILH)
 Ozone Generator (1*) (order: OZG)

AR2: *Revive Air System* (3*) includes: (52) Perimeter air ports, electronic system control, 12.0 amp, 600-watt blower with ceramic heater and a removable access panel (S model).

Notes: (1*) Factory installed options
 (2*) Includes system control upgrade
 (3*) Available on acrylic models only

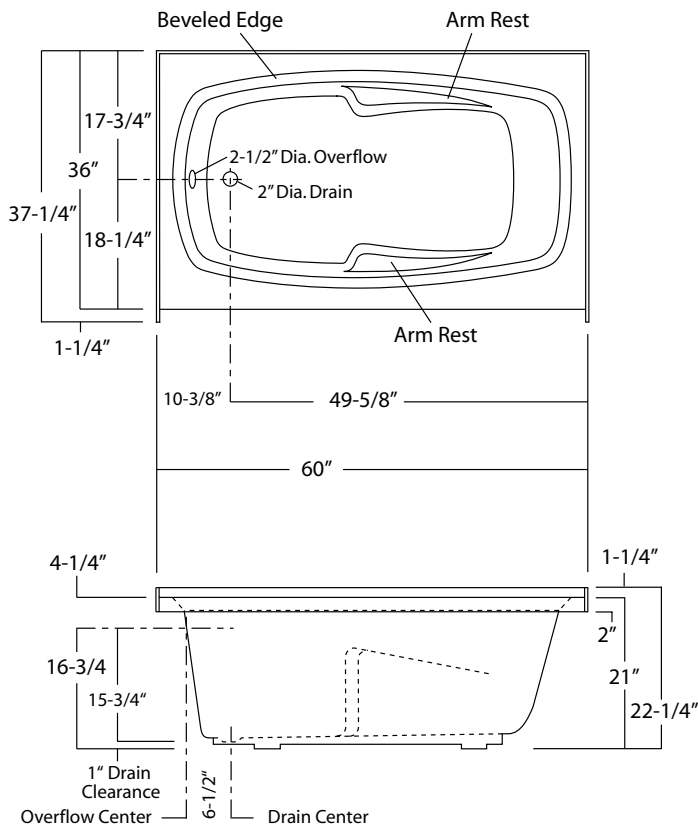

Geneva 3660: TR-IF-240L / TRG-IF-240L (illustrated)
 (S model full apron extends down to room floor)
 Sump Dimen: 48-1/4" long x 26-1/2" wide x 19" deep
 Sump Capacity: 62 gal. (unoccupied - to overflow)
 Whirlpool Operating: 33 gal.

