

TUB / SHOWER

Oasis



MULTI-PIECE MODEL

TS-P-35 (4-piece)

Rough-In Dimensions

60" wide x 34-1/2" deep x 75-1/4" high (w/ 16-inch apron)

Finished Dimensions

60" wide x 33-1/4" deep x 74" high (w/ 16-inch apron)

Unit Features




- Four - Piece Fiberglass Composite Construction
- Sanitary Grade Polyester Gelcoat Surface
- 2" Dia. Drain / RH or LH (see reverse side for location)
- 2-1/2" Dia. Overflow (see reverse side for location)
- Twin / Elevated Back Wall Shelves
- Textured Floor Pattern
- Balsa Wood Core Floor Structure

Special Notes

- Optional ABF Model (provides 3-3/4-inches of drain clearance)
- UL Listed Whirlpool System Available (see reverse side for details)
- Unit Temporarily Assembled for Shipping

TS-P-35R ABF/6P (illustrated)

	Std Unit	ABF Unit
A	75-1/4"	76-1/2"
B	74"	75-1/4"
C	16"	17-1/4"
D	2-1/2"	3-3/4"
E	13-3/4"	15"
F	-	-

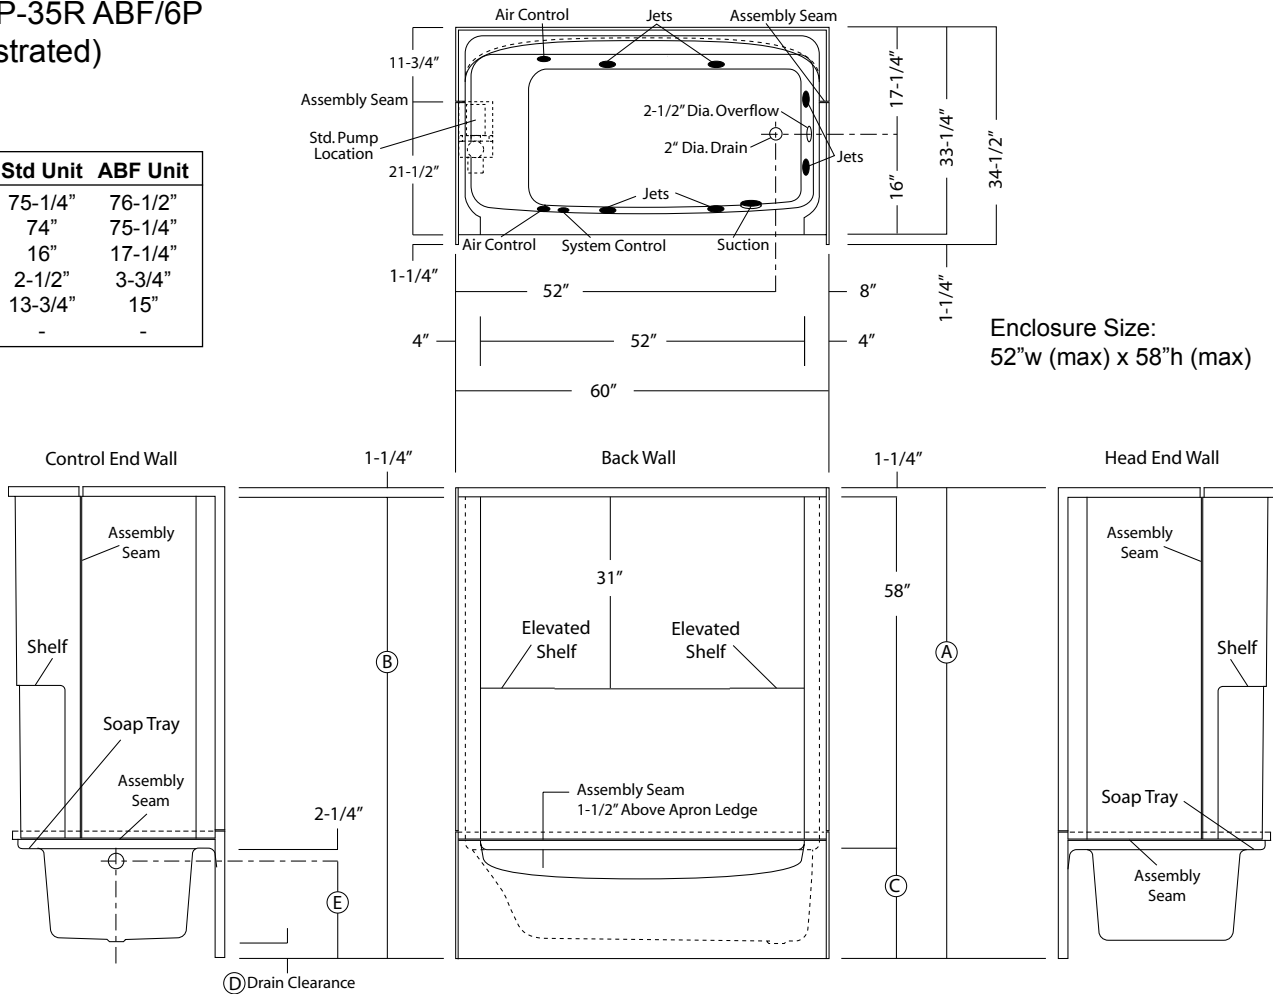

Enclosure Size:
52\"w (max) x 58\"h (max)

Tub/Shower Module

- Order No.: TS-P-35R (RH drain)
 TS-P-35R ABF (RH drain, Above Floor Rough)
 TS-P-35L (LH drain)
 TS-P-35L ABF (LH drain, Above Floor Rough)

60" x 33-1/4", four-piece gelcoated fiberglass tub/shower with 16" apron (ABF ver.: 17-1/4" apron with additional drain clearance for above floor plumbing), wall surround, and end drain as indicated.

Whirlpool System

- Order No.: TS-P-35R / 6P (RH drain)
 TS-P-35R ABF / 6P (RH drain, Above Floor Rough)
 TS-P-35L / 6P (LH drain)
 TS-P-35L ABF / 6P (LH drain, Above Floor Rough)

Builder System includes: 6-Adjustable jets, twin-air injection controls, pneumatic on/off control, and 5.5 amp pump/motor.

- Options: In-Line Heater (1*) (order code ILH)
 Ozone Generator (1*) (order code OZG)

- Notes: (1*) Factory installed options
 (2*) Includes system control upgrade

Removable access panel currently not available for this model.

Sump Dimensions: 48" long x 21" wide x 13-1/4" deep
 Sump Capacity: 40 gal. (unoccupied - to overflow)
 Whirlpool Operating: 37 gal.