



VERTICAL STORAGE TANKS • Insulated and Jacketed

AquaPLEX® STORAGE TANK (UNLINED DUPLEX ALLOY)


TANK SERIES 125 - 3000 GALLONS

Model No.	Gallons Storage	Dimensions in Inches					Circulating Connections for HWS Boiler NPT ①	Water Inlet and Outlet Connections NPT	Drain Valve Fitting NPT	Approx. Shipping Weight lbs
		A	B	C	D	F				
L 125A-TR	125	29 1/2	75	15	37	20	3	2	1	755
L 150A-TR	150	34x37	65	17	38	21	3	2	1	815
L 175A-TR	175	34x37	71	17	38	21	3	2	1	855
L 215A-TR	215	34x37	78	17	38	21	3	2	1	895
L 250A-TR	250	46	63	19	41	31	3	2	1	945
L 300A-TR	300	46	75	19	41	31	3	2	1	1010
L 400A-TR	400	46	87	19	41	31	3	2	1	1070
L 500A-TR	500	56	78	20	42	31	3	3	2	1415
L 600A-TR	600	56	90	20	42	31	3	3	2	1605
L 750A-TR	750	67	83	22	44	40	3	3	2	1770
L 900A-TR	900	67	95	22	44	40	3	3	2	1990
L 1000A-TR	1000	67	107	22	44	40	3	3	2	2210
L 1250A-TR	1250	75	94	21	43	47	3	3	2	3030
L 1500A-TR	1500	75	106	21	43	47	3	3	2	3245
L 1750A-TR	1750	75	130	21	43	47	3	3	2	3685
L 2000A-TR	2000	75	142	21	43	47	3	3	2	4160
L 2500A-TR	2500	75	154	21	43	47	3	3	2	4425
L 3000A-TR	3000	75	178	21	43	47	3	3	2	4865

① Connecting multiple water heaters or hot water supply boilers to the same tank may require additional circulation fittings. Dimensions are in inches unless otherwise noted. For larger storage capacities, consult factory. For standard and optional equipment, see form PV 8066.



Tank sizes 1000, and 1500 - 3000 gallon include horizontal shipping skids (not shown).

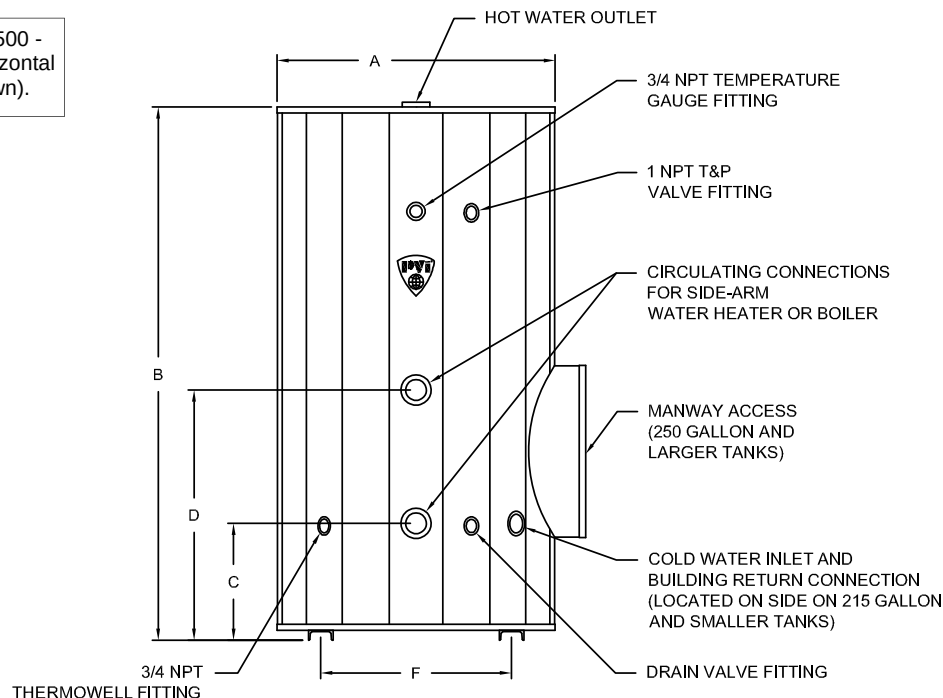

PVI RESERVES THE RIGHT TO CHANGE THE DESIGN AND SPECIFICATION WITHOUT NOTICE.