

ADJUSTABLE BRACKET

»» 520-6 SERIES

WiderSlider™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 520-6 series WiderSlider™ adjustable bracket shall be used where necessary to support drop-ear 90 fittings, tube clamps, tube straps and electrical boxes. All installations shall comply with local or national codes. Brackets shall be UPC IAPMO Listed. Bracket shall be corrosion resistant.

MATERIALS

22 gauge G90 galvanized steel

LOAD RATING



Maximum Load: 25 lbs.

INSTALLATION

Bend tabs to accommodate 3/4", 1-1/2" or 2-1/8" depths from face of stud. Secure bracket within stud bay or floor joist with at least 4 screws (not included). Secure DE-90 elbow, pipe clamps, tube straps or electrical outlet boxes directly to bracket using self-tapping screws (not included).

DIMENSIONS

	520-616	520-626
A: bracketing area length	9"-15"	13"-23"
B: bracket width	1-3/8"	1-3/8"
C: tab length	2.88"	2.88"
D: pilot hole spacing	0.203" on center	0.203" on center
E: pilot hole diameter	0.1"	0.1"

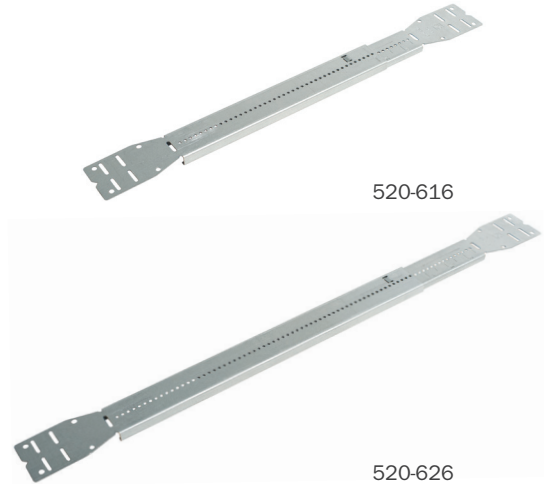

Made in USA

Create Item Number

520-6A6

e.g. 520-616: galvanized bracket for 16" stud bays with 9"-15" adjustability

BRACKET CONFIGURATION A

- 1 = Galvanized bracket for 16" stud bays with 9"-15" adjustability
- 2 = Galvanized bracket for 26" stud bays with 13"-23" adjustability