

## COMMANDER®

### S-3551



### S-3561-LD



## Single Lever Faucet

### GENERAL SPECIFICATION

Polished chrome plated 4" centerset single lever faucet. All metal shell and belly plate. Long-life ceramic cartridge. Adjustable temperature limit and flow control. Water conserving flow control reduces flow to 2.2 gpm/8.4 lpm. Copper tube inlets with 1/2" compression male threads. Meets ASME A112.18.1/CSA B125.1 and NSF61.

#### ☐ **S-3551**

Single lever faucet with solid brass 1-1/4" pop-up drain.

#### ☐ **S-3561**

Single lever faucet. Strainer drain.

#### ☐ **S-3561-LD**

Single lever faucet. No drain assembly.

### OPTIONS





SUFFIX	DESCRIPTION
<input type="checkbox"/> ADA	6" single lever handle
<input type="checkbox"/> BO	0.5 gpm flow control, vandal-resistant
<input type="checkbox"/> GB	1.5 gpm flow control, vandal-resistant
<input type="checkbox"/> LF	2.2 gpm laminar flow control outlet, vandal-resistant
<input type="checkbox"/> VR	2.2 aerated flow control, vandal-resistant

This space for Architect/Engineer approval.



## Rough-Ins

**S-3551**  
**S-3561-LD**  
**S-3561**

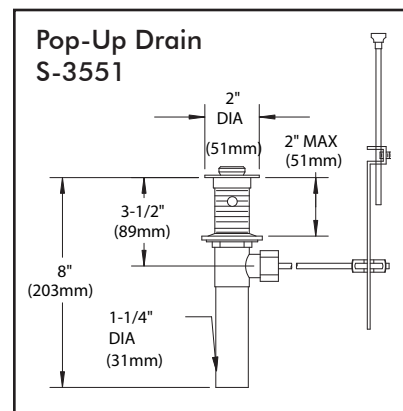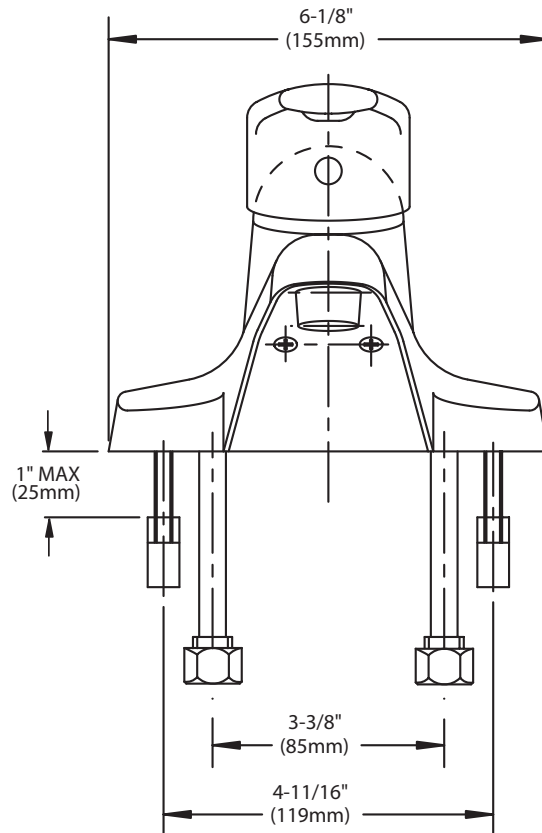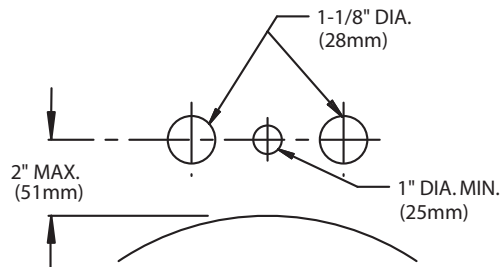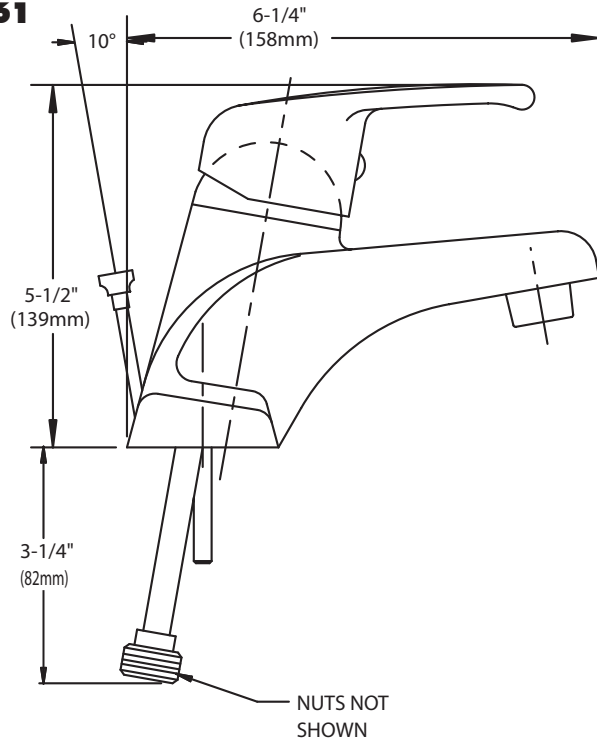

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Lavatory inlets are sized for coupling connections. Unless otherwise specified, all inlets are 1/2" NPSM.

## DRAINS

**S-3357**



**S-3440**



## Lavatory Drain

### GENERAL SPECIFICATION


Chrome plated lavatory drain. Brass O.D. tailpiece.

#### □ **S-3357**


Chrome plated brass pop-up drain. Chrome plated brass cap and rubber seal. Vandal-resistant lift plug.

#### □ **S-3440**

Chrome plated strainer drain. Flat chrome plated brass strainer plate.

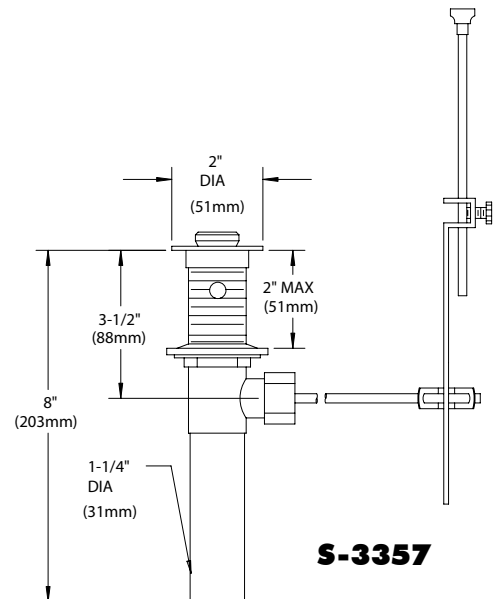

**S-3357**

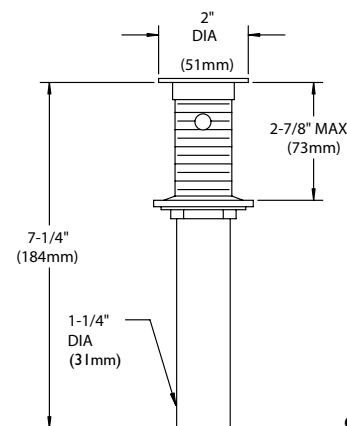

**S-3440**

**NOTE:**  
1. ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.

This space for Architect/Engineer approval.