

SPEAKMAN®

SE-570

EYESAVER® EYEWASH

DESCRIPTION

The SE-570 Eyesaver® swing activated eyewash for laboratory applications where low profile eyewash is desired. The unit features a built-in flow regulator to compensate for varying supply pressures and aerated sprays that offer gentle yet thorough cleaning action.

SPECIFICATIONS

Spray Heads: (2) aerated yellow ABS plastic spray outlets with flip-top dust caps

Valve: ¼ turn ceramic Perfect® valve


Activator: Swing activated

Inlet: ½" NPT male

Performance: 3.0 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

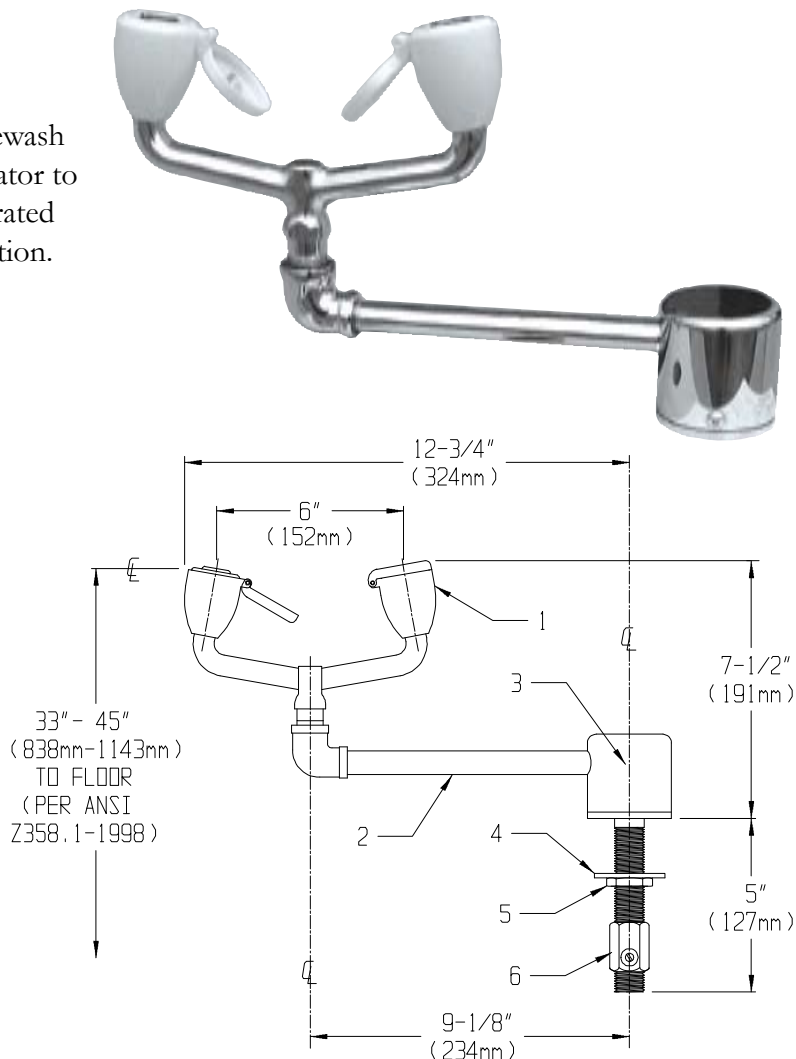

OPTIONS

- ☐ ILS In-line strainer
- ☐ LH Left hand operation

Job Name _____

Location _____

Architect/Engineer _____

Sales Representative _____

Wholesaler _____

Date _____ Model # _____