


SPEAKMAN®

Combination Shower & Eyewash SE-697

SPECIFICATION

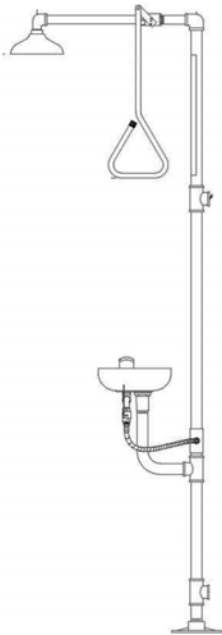

FEATURES:

- 8" Cyclac® yellow plastic showerhead
- Internal 20 gpm restrictor flow control
- 1" NPT female brass, chrome plated, full flow stay-open ball valve
- Powder coated yellow aluminum triangular pull rod activator
- 1 1/4" galvanized steel piping stanchion with brass fittings
- 1 1/4" NPT female inlet & waste
- 20 gpm @ 30 psi

EYE/FACE WASH: SE-580

- Yellow plastic bowl
- (2) aerated yellow plastic spray outlets with flip-top dust caps
- 1/2" NPT female brass, chrome plated, full flow stay-open ball valve
- Stainless steel push handle activator
- 1/2" NPT female inlet
- 3.18 gpm @ 30 psi
- Universal Emergency Sign Included

COMPLIANCE:

- ANSI Z358.1

AVAILABLE FINISHES:

- Galvanized Steel (standard)
- Powder coat finish

☐ -PA


OPTIONS:

ADD SUFFIX TO MODEL #

- | | |
|--------------------------------|---------------------------------|
| • 30 GPM REGULATOR | ☐ -30GPM |
| • BRASS SHOWERHEAD | ☐ -BH |
| • FLOW SWITCH | ☐ -FLW |
| • ANTI-FREEZE PROTECTION VALVE | ☐ -FPV |
| • HAND & FOOT OPERATION | ☐ -HFO |
| • HAND-HELD SPRAY | ☐ -HS |
| • SELF-CLOSING SHOWER VALVE | ☐ -SCV |
| • ANTI-SCALD PROTECTION VALVE | ☐ -SPV |
| • STAINLESS STEEL PULL ROD | ☐ -SPR |
| • STAINLESS STEEL BALL VALVES | ☐ -SSBV |
| • STAINLESS STEEL SHOWERHEAD | ☐ -SSH |
| • TOP SUPPLY | ☐ -TS |
| • EXTENDED ALUMINUM PULL ROD | ☐ -XPR |

WARRANTY:

- 1 year limited

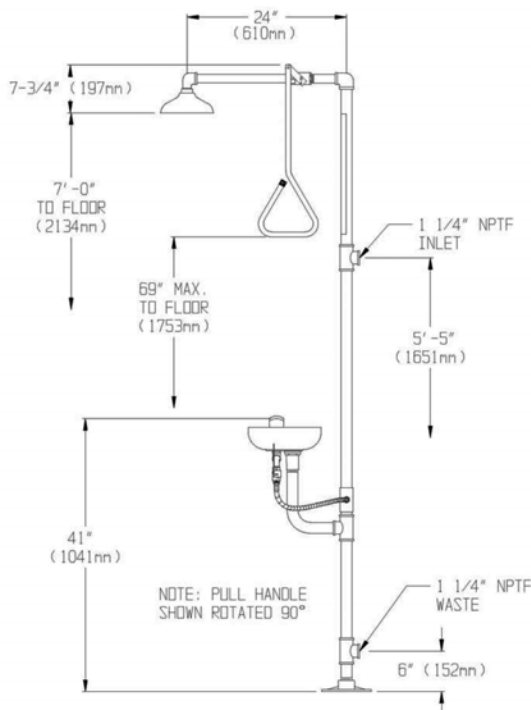

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM



REVISION DATE: MAR. 2012