
# **SPEAKMAN<sup>®</sup>**

SEF-1801

### Eyesaver® Laboratory Widespread Faucet with Integrated Eyewash

**SPECIFICATION** 

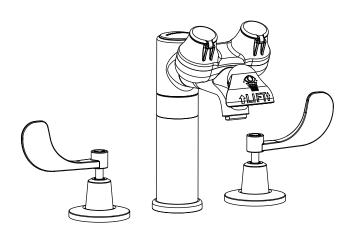

The Speakman SEF-1801 is a NSF 61 compliant widespread laboratory faucet with an integrated ANSI compliant aerated eyewash. Dedicated water ways allow the faucet and eyewash to work independently of each other.

#### **EYEWASH FEATURES:**

- Lift handle activator
- Dedicated water channel for eyewash
- Aerated plated spray outlets with flip-top dust caps
- 2 gpm (7.57 L/min) flow rate at 30 PSI
- Tepid water ready

#### **FAUCET FEATURES:**

- Lead-free brass construction
- ¼ turn ceramic cartridges
- Cross handles with color-coded indexes
- Swivel or rigid spout up to 100 degrees
- Widespread installation
- 1.5 gpm (5.7 L/min) flow rate

#### **COMPLIANCE:**

 Certified to ANSI/ISEA Z358.1, ASME A112.18.1/CSA B125.1, NSF 61 & NSF 372

#### **FINISHES:**

ADD SUFFIX TO MODEL

• Polished Chrome (standard)

#### **OPTIONS:**

• 8 in. deep gooseneck rigid or swivel 8- 🗆 • 0.5 gpm vandal-resistant flow control outlet □-BO Foot pedal activation (not NSF 372 compliant) □-FP • 1.5 gpm laminar flow for faucet outlet ☐ -LF • Non-aerated eyewash spray outlets and laminar flow control □-NA • Serrated tip with vacuum breaker (not NSF 372 compliant) □ -ST • Se-370 thermostatic mixing valve ☐ -TW • Under-counter TMV (electronic only) for faucet temp. □ -TMV

#### **WARRANTY:**

- 25 years for ceramic cartridges
- 3 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS PATENT PENDING

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# **SPEAKMAN®**

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720 P: 800-537-2107 | F: 800-977-2747 W W W . S P E A K M A N C O M P A N Y . C O M

REVISION DATE: JUNE 2014




Management Systems Registered to ISO 9001

# **SPEAKMAN®**


## Eyesaver® Laboratory Widespread Faucet with Integrated Eyewash SEF-1801

**SPECIFICATION** 

#### FRONT VIEW

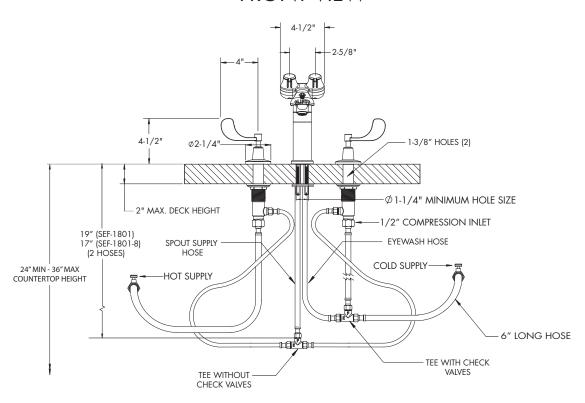

### SEF-1801 SIDE VIEW (LESS HOSES)



NOTE: 1. Unless otherwise specified, all inlets are 3/8" compression with female threads. 2.All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

## **SPEAKMAN®**

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720 P: 800-537-2107 | F: 800-977-2747 W W W . S P E A K M A N C O M P A N Y . C O M

REVISION DATE: JUNE 2014



Management Systems
Registered to ISO 9001