



### FEATURES:

- Includes Sentinel Mark II® concealed anti-scald balanced pressure shower valve and handheld spray combination.
- Chrome plated brass wall plate with metal index.
- Chrome plated brass lever handle.
- Independent center sleeve allows up to 1 in. of rough-in variation.
- Adjustable temperature limit stop. Brass body.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- Four port valve with ½ in. female copper sweat inlets and shower outlet (tub outlet ½ NPT female).
- Furnished with ½ pipe plug. In-line vacuum breaker.
- VS-100-PC handshower with flow control device reduces flow to 2.5 gpm (9.46 L/min) maximum.
- Chrome 5' metal shower hose, ½ in. NPSF connectors.
- Swivel arm holder.
- 24 in. combination slide bar and grab bar, stainless steel and chrome.

### COMPLIANCE:

- Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG
- Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards



### FINISH:

- Polished Chrome (standard)

### OPTIONS:

ADD SUFFIX TO MODEL #

- VS-2272-E15 1.5 gpm hand shower & VS-156 pause/trickle adaptor ☐ -E15
- Integral stops ☐ -IS

### WARRANTY:

- 1 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: OCTOBER 2014




Management Systems  
Registered to ISO 9001

# SPEAKMAN®

## Versatile™ Pressure Balance Handicap Shower Combination SM-3080-ADA

### SPECIFICATION

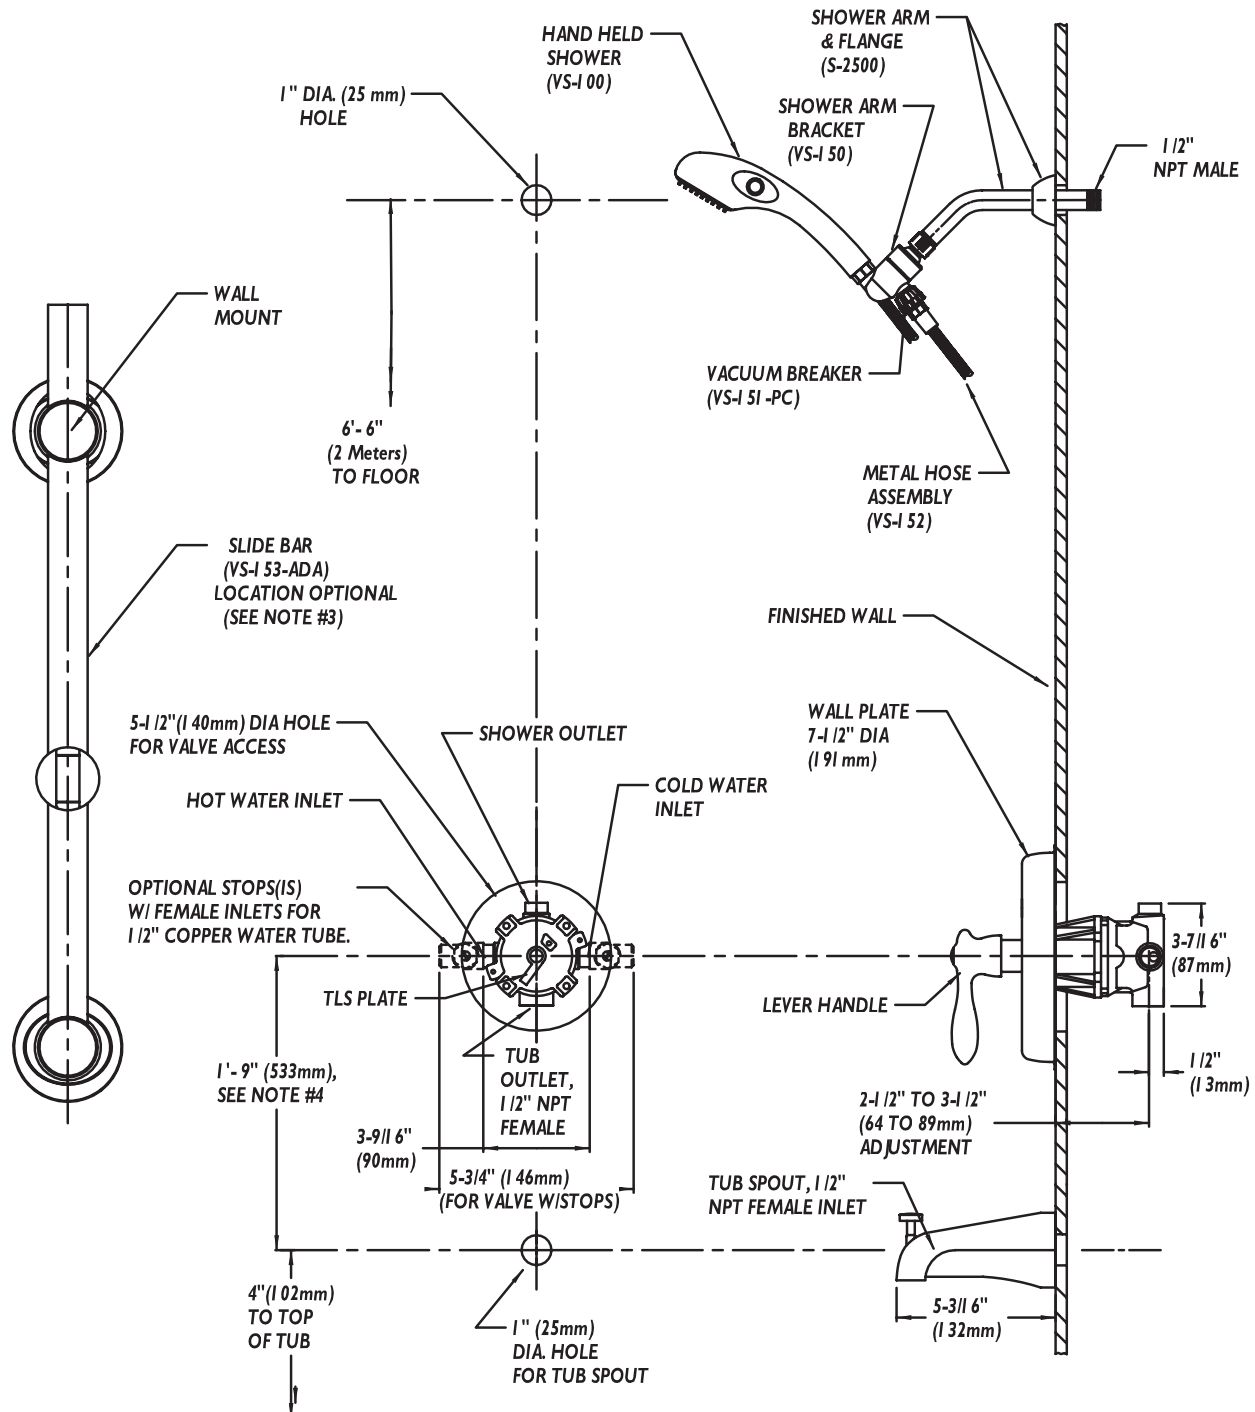

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. 3. The location of the slide bar and supply ell is optional, but restricted by the 69" hose length running from the supply ell connection to hand shower and the 6" minimum requirement between the in-line vacuum breaker & top of hand shower. 4. For ADA mounting locations consult ADAAG, ANSI A17.1, or state regulations.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: OCTOBER 2014



Management Systems  
Registered to ISO 9001