

A KOHLER, COMPANY ADVANTAGETM

#### **Features**

- Compression molded from our exclusive solid Vikrell<sub>®</sub> material
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Durable swirl-gloss finish
- 10-year consumer/3-year commercial limited warranty
- 36-1/4" (92.1 cm) x 35-1/4" (89.5 cm) x 73-1/4" (186.1 cm) complete unit rough-in dimensions include flange
- 36" (91.4 cm) x 34" (86.4 cm) x 72" (182.9 cm) complete unit finished dimensions


## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.

# 36'' (91.4 cm) SHOWER BASE AND WALL SURROUND 62020100





## Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Complete Unit Description	Colors/Finis	hes	
62020100	36" (91.4 cm) shower base and wall surround	<b>0</b>	☐ Other	
Model	Component Description	Colors/Finis	Colors/Finishes	
62021100	36" (91.4 cm) shower base only	<b>0</b>	☐ Other	
Model	Wall Component Description	Colors/Finis	Colors/Finishes	
62022100	Back wall	□ 0	☐ Other	
62015100	End wall set	□ 0	☐ Other	

## **ADVANTAGETM**

### **Technical Information**


Model	door maximum width	door maximum height
62020100	33-1/2" (85.1 cm)	67" (170.2 cm)


### **Installation Notes**

Install this product according to the installation guide. Size the drain cutout to fit the drain assembly that will be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.

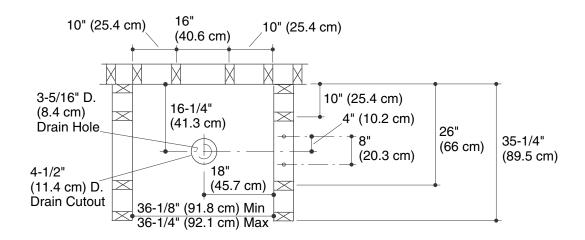

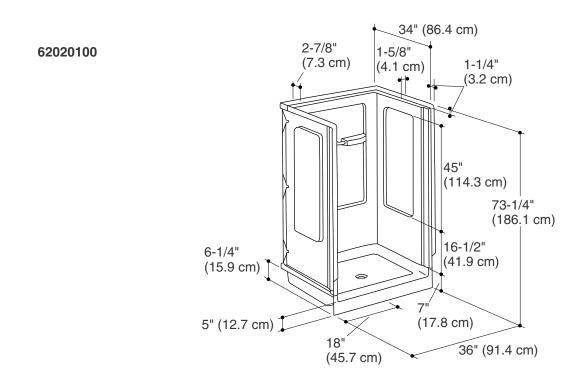

## **Product Diagram**

