

ACCORD®

Features

- \bullet Compression molded from our exclusive solid Vikrell_ $\!(\!_{\scriptsize \textcircled{\tiny B}}\!)$ material
- Modular 4-piece design
- Pivot "snap together" installation
- Convenient shelves provide generous storage
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- · Caulkless seam installation
- 42-1/4" (107.3 cm) x 37-1/4" (94.6 cm) x 77" (195.6 cm) rough-in dimensions include nailing flange
- 42" (106.7 cm) x 36" (91.4 cm) x 75-3/4" (192.6 cm) complete unit finished dimensions


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45

$^{42''}$ (106.7 cm) SHOWER RECEPTOR AND WALL SURROUND 72250100





Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Co	Colors/Finishes	
72250100	42" (106.7 cm) shower receptor and wall surround	□ 0	☐ Other	
Model	Wall Component Description	Co	Colors/Finishes	
72252100	42" (106.7 cm) backwall	□ 0	□ Other	
72251100	42" (106.7 cm) receptor	□ 0	☐ Other	
72245100	Endwall set	0	□ Other	
Model	Age in Place Component Description	Со	lors/Finishes	
72250106	42" (106.7 cm) shower receptor with age in place backers	□ 0	☐ Other	
72245106	Endwall set, age in place backers	0	☐ Other	

ACCORD®

Technical Information

Model	door maximum width	door maximum height
72250100	38-5/8" (98.1 cm)	72" (182.9 cm)

End stud positioning is critical.

Double studding is recommended for pivot shower door installations.


Studs should be positioned roughly as shown.

Receptor cannot be installed without the wall surround.


Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

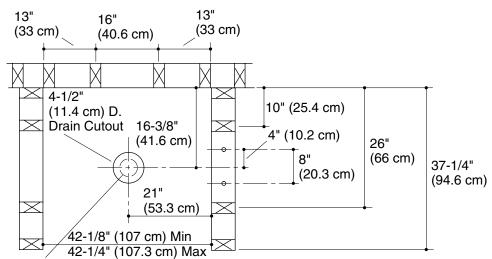

3-5/16" (8.4 cm) D. Drain Hole

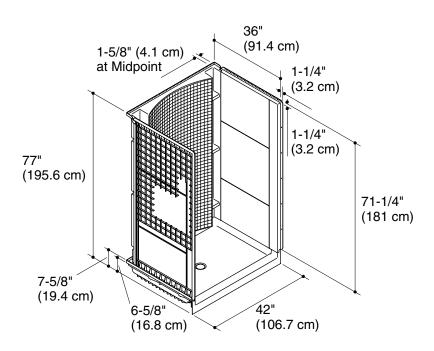

Product Diagram

