


Location:

SYMMONS® Temptrol®

Shower & Hand Shower System, 96-500-B30-L-V Specification Submittal

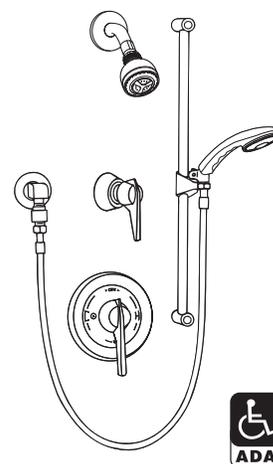

Feature Highlights


- Symmons Shower & Hand Shower System with lever handle
- Symmons Temptrol® pressure balancing mixing valve with integral diverter and adjustable stop screw to limit handle turn
- Wall/Hand shower, #T-300-V and a 5 foot flexible metal hose with in-line vacuum breaker, wall connection and flange
- 30 inch slide bar for hand shower mounting
- Standard flow rate 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictors available 
- Polished chrome finish (standard)

Model Numbers

- 96-500-B30-L-V
Shower and Hand Shower System with Symmons Temptrol® mixing valve
- 96-500-B30-L-V-TRM
Trim only, valve must be ordered separately

Handle Options / Modifications

Append appropriate -suffix to model number

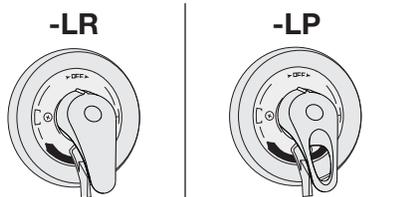

- LR Lever handle
- LP Loop style lever handle

Finish Options / Modifications

Append appropriate -suffix to model number.

- Polished chrome (standard)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Options / Modifications

Append appropriate -suffix to model number


- X Symmons Temptrol mixing valve includes integral service stops to allow water shut-off for service
- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- REV Reverse coring in valve for back to back installations; hot on right, cold on left, Note: Available with -X integral stops only
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops. Note: Available with -X integral stops only
-  -2.0 2.0 gpm (7.6 L/min) flow rate restrictor (Requires substituting T-300-V hand shower wand with EF-100)
-  -1.5 1.5 gpm (5.7 L/min) flow rate restrictor (Requires substituting T-300-V hand shower wand with EF-100)
- L/HD Showerhead not included, Mounting bracket and flange is included
- L/HS Hand Shower wand not included Includes hose, in-line vacuum breaker, wall connections and flange only
- 72 6 foot hand shower hose in place of standard 5 foot hose
- R Vinyl hose in place of flexible metal hose
- B48 48 inch slide bar in place of standard 30 inch
- QD Quick-disconnect on hand shower
- B Chrome brass escutcheon
- VP Vandal resistant

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions Temptrol Shower System with Hand Shower, 96-500-B30-L-V

Male 1/2" I.P.S. thread must protrude 3/8" (10mm) from finished wall for proper installation of street ell and flange.

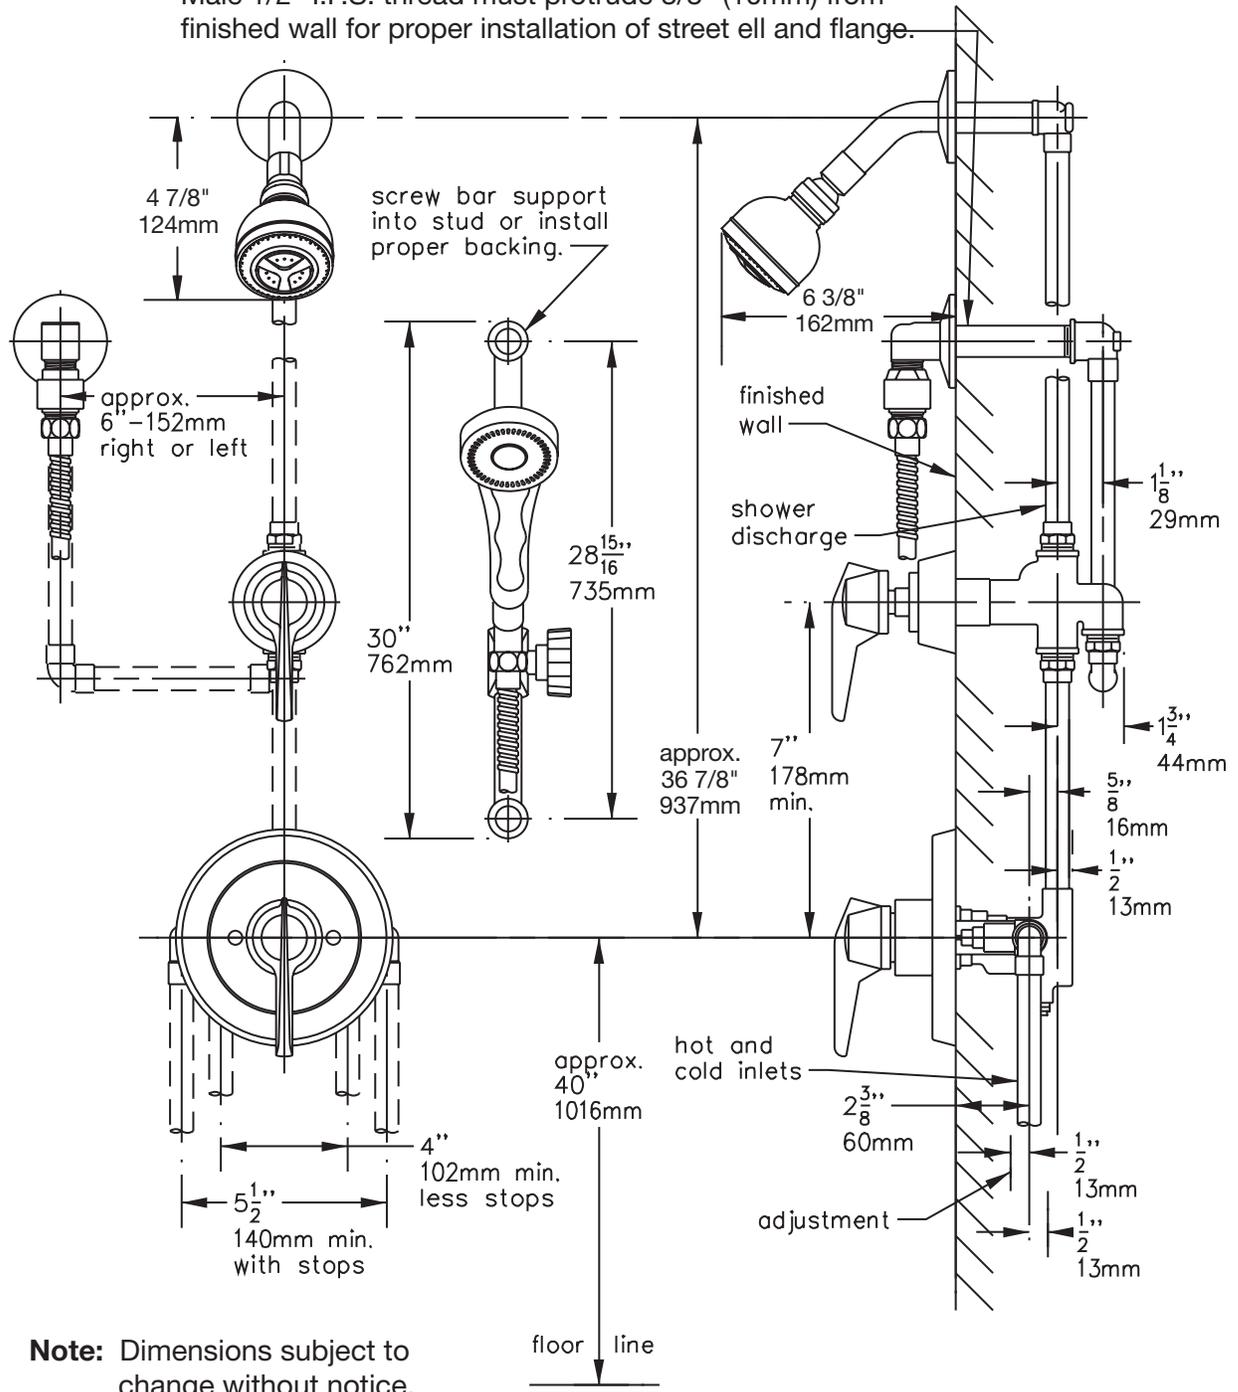

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2009, 2010 Symmons Industries, Inc. Printed in U.S.A. ■ 082310

SYMMONS[®]
 the smart choice™