


BP-56-500-B30-V Temptrol II™ Shower System with Hand Spray


Temptrol II (BP Series) Pressure Balancing mixing valve with adjustable stop screw to limit handle turn. Clear-Flo shower head with arm and flange. Lever diverter with integral volume control. Wall/hand shower with 5' flexible metal hose, in-line vacuum breaker, wall connection and flange. 30" slide bar for hand shower mounting.

Modifications:

- Suffix X:** Integral service stops—allows water shut-off at valve for service
- Suffix B:** Chrome brass escutcheon on valve
- Suffix B48:** 48" adjusting bar in place of standard 30" bar
- Suffix 6:** 6' hose in place of standard 5' hose

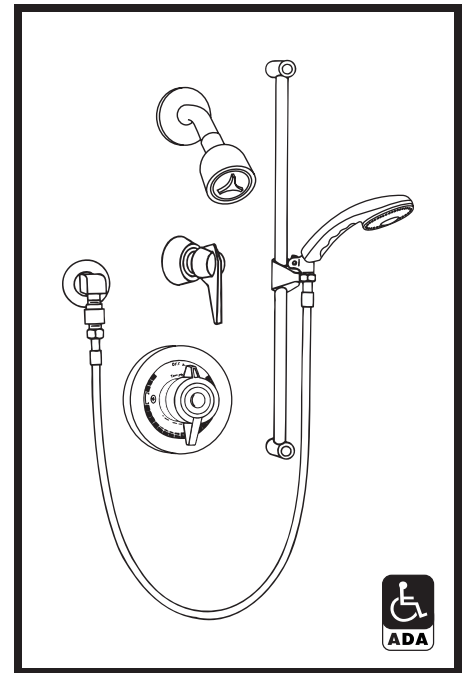


**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

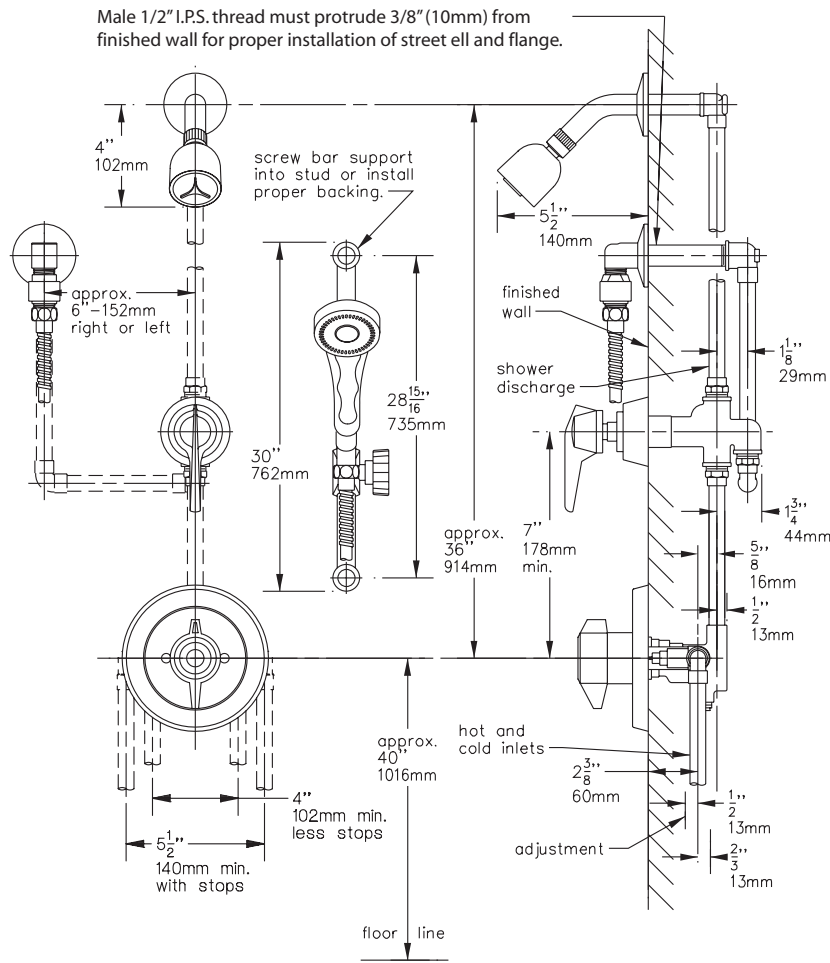

Job/Location

Engineer

Contractor

 This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. Dimensions are for ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.







Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 042808




SYMMONS[®]
the smart choice™

Modification Symbols









Available Finishes:

-  **Chrome**
-  **LR-** Lever handle
-  **LP-** Loop handle
-  **X-** Integral service stops - allows water shutoff at valve for service
-  **IPS-** 1/2" female IPS connections
-  **REV-** Reverse coring, hot on right, cold on left, for back to back installations

Flow Rate:

-  **2.5 (standard)** - 2.5 gpm (9.5 L/min) flow restrictor
-  **2.0-** 2.0 gpm (7.6 L/min) flow restrictor
-  **1.5-** 1.5 gpm (5.7 L/min) flow restrictor

Other:

-  **LAM-** Metal finish insert handle
-  **LPO-** White insert handle
-  **CR-** Cross handle
-  **LCF-** Clear faceted insert handle
-  **LCT-** Clear acrylic handle
-  **PSH-** Pulsating shower head in place of Clear-Flo head
-  **CC-** Conversion cover plate
-  **RC-** Remodel cover plate