


BP-56-600-B30-V Temptrol II™ Tub and Shower System with Hand Spray


Temptrol II (BP Series) Pressure Balancing mixing valve with built-in choke, adjustable stop screw to limit handle turn. Lever diverter with integral volume control. Clear-Flo shower head with arm and flange. Tub spout. Wall/hand shower with 5' flexible metal hose, in-line vacuum breaker, wall connection and flange. 30" slide bar for hand shower mounting.

Modifications:

- Suffix X:** Integral service stops—allows water shut-off at valve for service
- Suffix B:** Chrome brass escutcheon on valve
- Suffix SS:** Slip-on type tub spout in place of standard tub spout
- Suffix B48:** 48" adjusting bar in place of standard 30" bar

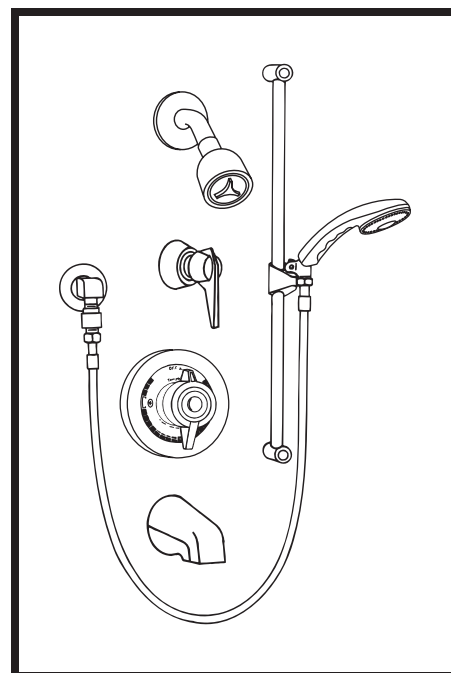

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

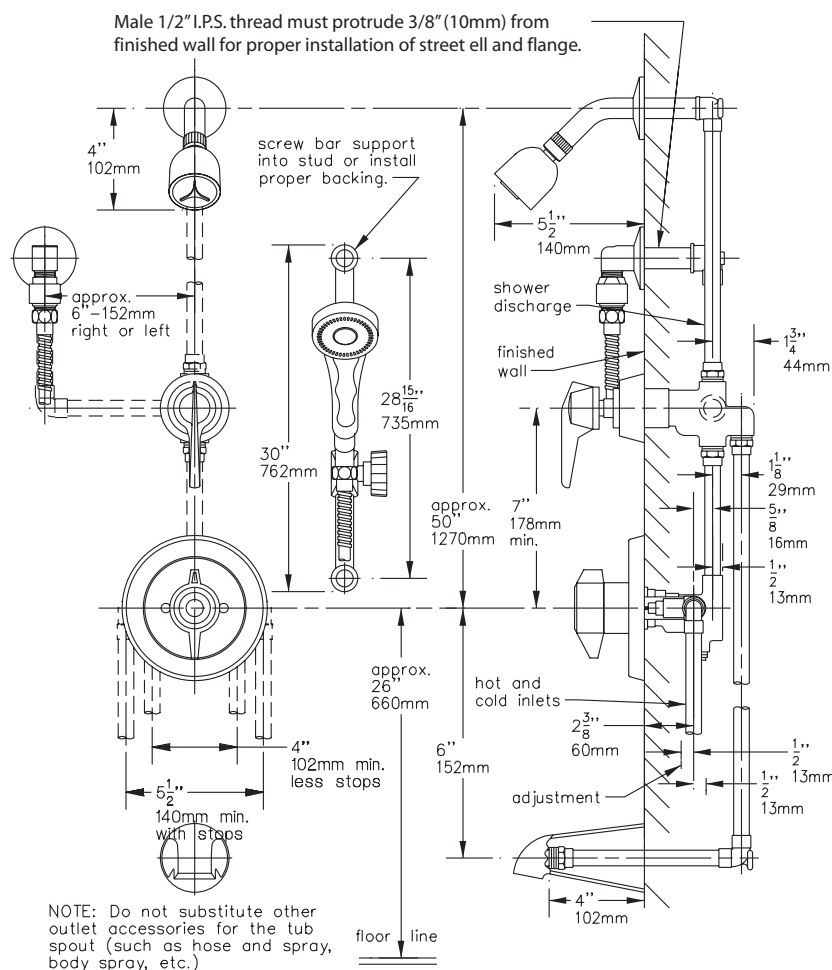

Job/Location

Engineer

Contractor

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 042808














SYMMONS®
the smart choice™

Modification Symbols

Available Finishes:

-  **Chrome**

Other:

-  **LAM-** Metal finish insert handle
-  **LPO-** White insert handle
-  **CR-** Cross handle
-  **LR-** Lever handle
-  **LP-** Loop handle
-  **LCF-** Clear faceted insert handle
-  **LCT-** Clear acrylic handle
-  **PSH-** Pulsating shower head in place of Clear-Flo head
-  **X-** Integral service stops - allows water shutoff at valve for service
-  **IPS-** 1/2" female IPS connections
-  **REV-** Reverse coring, hot on right, cold on left, for back to back installations
-  **CC-** Conversion cover plate
-  **RC-** Remodel cover plate