

**WarmRain** Specification for model:  
WR 942



Warm Rain model WR 942 soaking tubs are constructed of reinforced polyester resin covered with a high gloss .125 acrylic sheet. The reinforced fiberglass has a minimum content of 18 % fiberglass.

The bottom base of the unit is constructed of 1/2" end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass. The base is an integral part of the unit.

The inside bottom floor will be textured. The texture bottom floor meets and exceeds ASTM Safety Specification F-462.

The unit will measure 72" x 42" x 20" and has a 20" front outside skirt height. The inside dam will measure 19" and the overflow will be 15.5" above the floor.


The inside sump area will measure 57" x 30" at the top of the well and 43" x 26" at the bottom of the well.

The unit includes 2 - built in color coordinated pillows.



These Warm Rain soaking tubs arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84 and is certified by the Home Innovation Research Labs, formerly known as the National Association of Home Builders NAHB.



**WarmRain** Specification for model:  
WR 942

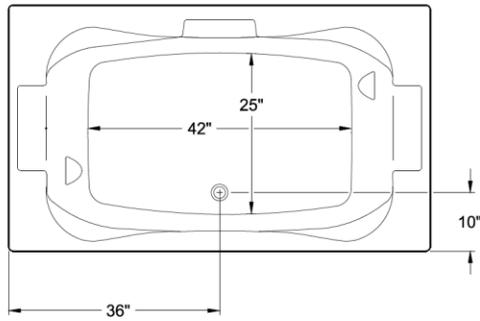

WR 942

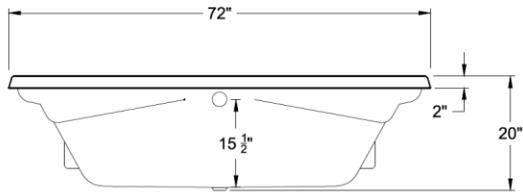


9-14-12



# Installation Notes for WR 942, WR 942 AT, WR 942 SP BATHING MODULES



## 6' STEEPING WHIRLPOOL BATH

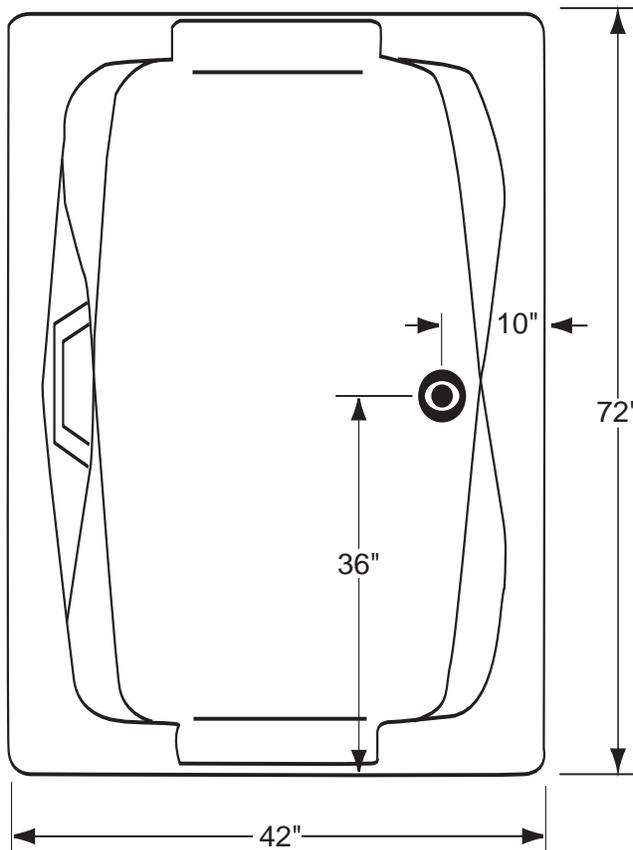

### INSTALLATION NOTES

1. Inspect framed-in area for proper size, square, and plumb.
2. The frame should allow 1" of the tub to extend over it all the way around, i.e. 942 SP = 72"x42" frame I.D. should be 70"x40".
3. It is not necessary to support the bottom of your warm rain unit.
4. Caulk seam to insure no movement of tub after installation.
5. After installation, clean module with warm water and liquid detergent. Paints and other materials can be easily removed without damage to the unit by the use of turpentine, paint thinner, or acetone.
6. Any scratches or dull areas in unit may be removed with automotive type rubbing compound.

Available with factory installed flange.

FOR MODEL WR 942 SP  
normal operating capacity approx. 50 gal.

**NOTE**  
ALL DIMENSIONS  
MAY VARY  
± 1/4"