


## Z1209-ND4-F

## SPECIFICATION SHEET

**TAG** 

VERTICAL OFFSET BACK-TO-BACK SIPHON JET SUPPORT SYSTEMFOR FLOOR-MOUNTED BACK OUTLET FIXTURES

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

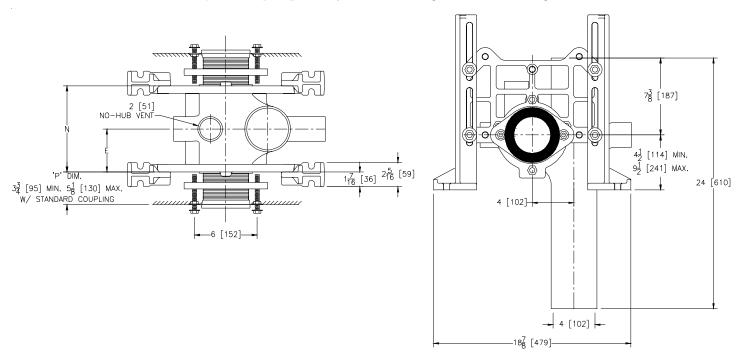

## NOTE:

- 1. Min. 'P' dim. obtainable = 1-1/4 [32]
- 2. Feet bolted to floor using min. Ø1/2 [13] anchors and back slots on carrier feet.

Product	Dim. in	Approx.	
No.	E	N	Wt. Lbs.
Z1209-ND4/-HD4	4-1/8 [105]	8-1/4 [210]	110 [50]

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

## **ENGINEERING SPECIFICATION: ZURNZ1209-ND4**

Back-to-back vertical offset siphon jet water closet "Rigid System" with 4 [102] size no-hub or hub and spigot connections and 2 [51] vent. Complete with dura-coated cast iron main fitting, separable faceplates rigidly mounted on fitting, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture trim, stud protectors, bonded "Neo-Seal" gasket, and back outlet fixture supports.

PRODUCTNO. Z1209-ND4

ODTIONS	(Check/specify	annranriata	ontions
OPTIONS	III.neck/snecity	appropriate	ODHOUS

OPTIO	ing (Ch	ieck/spe	ecity appropriate options)					
	Z1209 Z1209		4 [102] No-Hub Stack, Double Inlet, 4 [102] Hub and Spigot Stack, Double					
PREFIX	XES Z ZQ		C.I. System with Zurn "ZZ" Adjustable C C.I. System with N.P.T. Non-Adjustable		I			
SUFFIX	-A -CC -CL -G	(For P Corros (6 [15] Coupl (speci Galva Two 2 2 [51] 2 [51]	ary Support Assembly P-Dim. grater than 18 [457]) sion Resistant Cast Iron Coupling 2] to 12 [305]) ing Length Greater than 12 [305] ify length required) nized Cast Iron 2 [51] Auxiliary Inlets Stack Side Auxiliary Inlet ary Foot Support		-RYK -VP -29 -50 -61	Vandal Proof Trim Mechanical Test Ca	p Assembly Support for Water Close	ets
	-11/1		2-Dim. 10 [254] -18 [457])	RE	V. A	DATE: 09/26/11	C.N. NO. 122204	

DWG. NO. 301271