



Z5750

0.5 - 1.0 gpf Washout Urinal

TAG _____



Z5750 Series

- 0.5 - 1.0 gpf (gallons per flush)
- Vitreous china
- Washout flushing action
- 3/4" top spud
- 2" I.P.S. outlet flange and rubber gasket with integral trap
- 14" extended rim for handicap compliance when installed at proper height
- Shipping Weight: 65 lbs.

Engineering Specification:

- Z5750** with 3/4" top spud, vitreous china, 0.5gpf [1.9 Lpf] 1.0 gpf [3.8 Lpf] low consumption, wall hung urinal with 3/4" top spud and concealed wall hanger brackets.

Z5750 Series

Recommended Trim:

- Z6003AV-WSI**
AquaVantage® AV low consumption exposed urinal flush valve.
- Z5978-STR**
Urinal Dome Strainer

Optional Water-Savings Trim:

- Z6003AV-EWS**
AquaVantage® AV .5 gpf extra water savings exposed urinal flush valve.

This space is for Architectural/engineering Approval

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2-2003 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 432mm (17") from finished floor.



See Zurn One Systems for suggested packages.

Zurn Plumbing Products Group Commercial Brass and Fixtures Operation
2640 South Work Street · Falconer, NY 14733 · Phone: 716-665-1132 · Fax: 716-665-1135 · www.zurn.com




Z5750

0.5 - 1.0 gpf Washout Urinal

TAG _____


Rough-in dimensions for Z5750 Series

- Z5750 with top spud

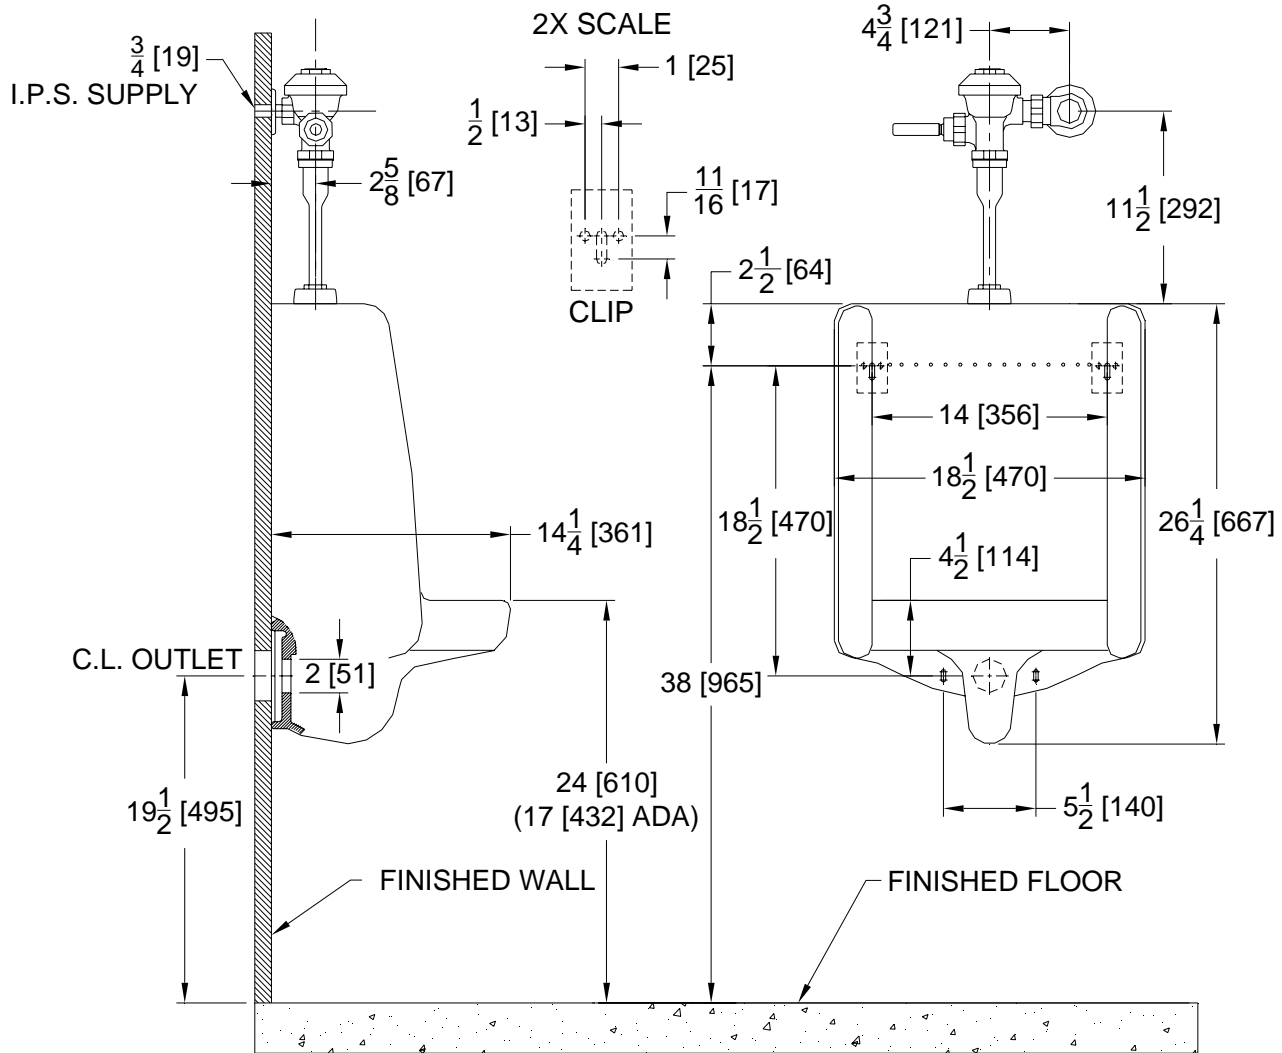

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2-2003 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 432mm (17") from finished floor. 

Zurn Plumbing Products Group Commercial Brass and Fixtures Operation

2640 South Work Street · Falconer, NY 14733 · Phone: 716-665-1132 · Fax: 716-665-1135 · www.zurn.com