


## **Z887-24**

## 23-1/4 [591] WIDE REVEAL x 24 [610] LONG CATCH BASIN

SPECIFICATION SHEE	T
--------------------	---

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

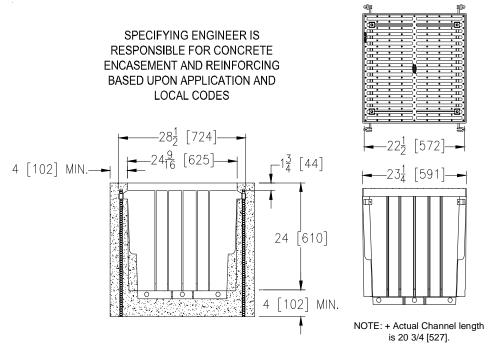

**ENGINEERING SPECIFICATION** Zurn Z887-24 Catch Basin shall be 23-1/4 [591] wide reveal x 24-5/8 [625] long and 24 [610] deep. Catch basin shall be made of 0% water absorbent High Density Polyethylene (HDPE). Shall mechanically lock into the concrete surround. Basin shall weigh less than 20.0 lbs. [9.1 kg]. Catch basin shall have rebar clips standard to secure basin in its final location. Shall be provided with standard DGC grate. Zurn 22-1/4 [565] wide reveal Ductile Iron Slotted Grate conforming to ASTM specification A536-84, Grade 80-55-06. Ductile Iron grate is rated class C per the DIN EN1433 top load classifications. Supplied in 24 [608] nominal lengths with 11/32 [9] wide slots, and 1-1/2 [38] bearing depth. Grate has an open area of 164.00 sq. in per ft.

with 11/32 [9] wide slots, and 1-1/2 [38] bearing depth. Grate has an	1 11 1 1
PREFIX OPTIONS (Check/specify appropriate options)	
Z High Density Polyethylene (HDPE) Catch Basin*	
	IA Inlet Adapter (Z886) IA Inlet Adapter (Z882)
Grate Options (Load Classifications are per DIN EN1433) DGC	
Miscellaneous Options	
MADE in the U.S.A. (Load Classifications are per DIN EN1433) FG Fabricated Galvanized Steel Slotted Grate - Class AFS Fabricated Stainless Steel Slotted Grate - Class APG Galvanized Steel Perforated Grate - Class APS Perforated Stainless Steel ADA Grate - Class ARFG-USA Reinforced Galvanized Steel Slotted Grate - Class BRFS-USA Reinforced Stainless Steel Slotted Grate - Class BRPG-USA Reinforced Galvanized Perforated ADA Grate - Class B	MADE in the U.S.A. (Load Classifications are per DIN EN1433)
	REV. L DATE: 3/15/11 C.N. NO. 121013

DWG. NO. 62253

PRODUCT NO. Z887-24

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED