


ZN1203-N4

ADJUSTABLE HORIZONTAL SIPHON JET NO-HUB NARROW WALL SYSTEM, (9-3/8 [238] DEPTH FRONT TO BACK)

SPECIFICATION SHEET
TAG


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

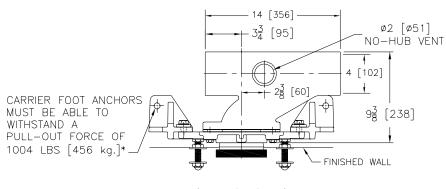

Product Number	Approx. Wt. Lbs. [ka]		
ZN1203-NL4	83 [37]		
ZN1203-NR4	00 [37]		



PRODUCT NO. ZN1203-N4

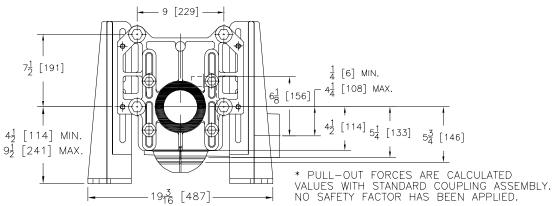

ENGINEERING SPECIFICATION: ZURN ZN1203-N()

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

Narrow Wall Adjustable, horizontal siphon jet water closet "Rigid System" with 4 [102] No-Hub connections. Complete with Dura-Coated cast iron right hand or left hand main fitting, with 2 [51] vent, adjustable gasketed chase saver face plate, floor mounted foot supports, corrosion resistant ABS coupling with integral test cap, fixture bolts, trim, stud protectors, and bonded "Neo-Seal" gasket. Carrier complies with all applicable requirements of ASME A112.6.1M up to a 300-Lb. [136-kg.] load.

OPTIONS (Check/specify appropriate options)

						REV.	G D	DATE: 02/24/11	C.N. NO. 120916		
	-61	"ZZ" Coup	oling Wrench		_						
	-50	Flush Val	ve Supply Suppo	rt for Water Close	ets						
	-VP	Vandal-Pr	oof Trim								
	-T	Threaded	Connection								
	-JC	2 [51] Aux	iliary Inlet on Fac	eplate Centerline	e (No-Hul	o Only)					
	-G	Galvanized Cast Iron						anchors capable of achieving the specified pull-out force.			
	-CV	Blowout Type Fixture Support CV Closed Vent (Use only when local codes allow)									
	-B							Feet bolted to floor using			
SUFFI	XES							Note:			
	ZQ	D.C.C.I. S	system with N.P.	T. Faceplate, No	n-Adjusta	able Cou	pling				
	Z			"ZZ" Adjustable							
PREFI	XES	50010		" ""	0 "	.					
	ZN12	03-NL4	4 [102] No-Hub	Left Hand Inlet w	ith Flow t	o Right f	or Narrow	Wall			
	ZN12	03-NR4	4 [102] No-Hub	Right Hand Inlet	with Flow	to Left f	or Narrow	Wall			

DWG. NO. 67531