

Your Peace of Mind is Our Top Priority®

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



SECTION: 2.45.050

FM0454

0717

Supersedes

0517

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 TEL: (502) 778-2731 • 1 (800) 928-PUMP • FAX: (502) 774-3624

Visit our web site:
www.zoellerpumps.com

910 SEWAGE SYSTEMS



Products may not be exactly as pictured.

Model 10-4012 shown.



OPTIONS: Zoeller recommends a High Water Alarm for added protection. See FM0732 for available models

910 - SIMPLEX & DUPLEX SEWAGE PACKAGE SYSTEMS (UNASSEMBLED)

Ideal for homes, farms, trailer courts, motels, restaurants and institutions where drain facilities are below existing sewer lines. Maximum Temperature rated at 130 °F (54 °C).

Model Number	Pump	Volts	Basin & Cover	Unicheck	Weight
910-0005*	M267	115V	Poly-Foam-18X30-2V2D	2" C.I.	77
910-0006*	D267	230V	Poly-Foam-18X30-2V2D	2" C.I.	77
910-0007*	M267	115V	Poly-Foam-18X30-3V2D	2" C.I.	77
910-0008*	D267	230V	Poly-Foam-18X30-3V2D	2" C.I.	77
910-0009†	M267	115V	Fiberglass-18X30-2V2D	2" C.I.	88
910-0016	M267	115V	Poly-18X30-2V2D	2" C.I.	83
910-0018*	M267	115V	Poly-18X30-2V2D	2" C.I.	82
910-0023	BN264	115V	Poly-18X30-2V2D	2" PVC	62
910-0024	BN267	115V	Poly-18X30-2V2D	2" PVC	76
910-0026	BN267	115V	Poly-Foam-18X30-2V2D	2" PVC	76
910-0030**	M264	115V	Duplex Poly-Foam-30X36-2V2D	2" Tri-check®	156
910-0031**	M267	115V	Duplex Poly-Foam-30X36-2V2D	2" Tri-check®	178

BASINS -

Polyethylene Structural Foam, Polyethylene or Fiberglass

* Split poly cover


† Split steel cover

**Duplex System is complete with (2) automatic pumps, (1) Smart Pak Plus residential alternator, (1) 30" x 36" duplex poly-foam basin and (2) 2" Tri-checks (check valve, ball valve and union all-in-one).

CHECK VALVES -

2" Cast Iron and 2" PVC full flow design.

Consult factory for other combinations and prices, including 2" and 3" vertical discharge and vent, 115 V or 230 V. Polyethylene basins recommended for indoor installations only.

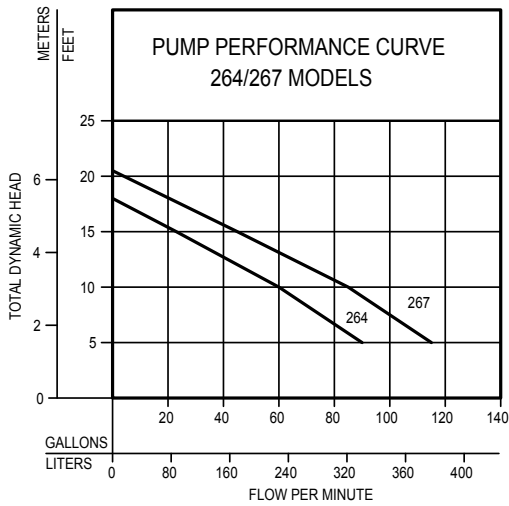


TOTAL DYNAMIC HEAD/FLOW
PER MINUTE
SEWAGE AND DEWATERING

MODELS		264		267	
Feet	Meters	Gal.	Liters	Gal.	Liters
5	1.5	90	341	115	435
10	3.0	60	227	85	322
15	4.6	23	87	45	170
Shut-off Head:		18 ft.(5.5m)		20.5 ft.(6.2m)	

009969B

Duplex System for Indoor Applications (unassembled)

(2) 2" Tri-Check® Valves



10-0804 Duplex Alternator



Duplex Basin with (2) Automatic Pumps



Indoor Sewage Applications Only
910-0030 (M264 - 4/10 HP) or 910-0031 (M267 - 1/2 HP)

includes:

- ✓ (2) Automatic Pumps (M264 or M267) Model Pumps
- ✓ (1) 10-0804 Smart Pak Residential Alternator with Alarm
- ✓ (1) 31-1105 30" X 36" Poly-foam Basin with 2" Vent /Discharge
- ✓ (2) 30-0101 Tri-Check® Valves